LED CANOPY LIGHT G5 SERIES





FEATURES

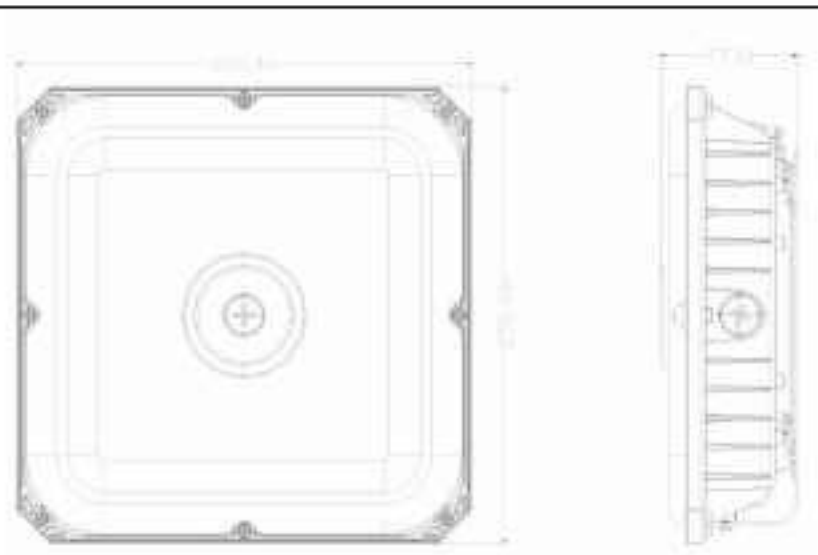
- **All in one:** 3/5 Power, 1/3/6 CCT Adjustable Option.
- **Construction:** Die-cast Aluminum Housing & Driver Housing.
- **IP Rating:** LED light engine rated IP65.
- **Finish:** Powder coated, Bronze/Customized.
- **Driver:** Becky(BQ) 120-277V/120-347V Option, 0-10V Dimming.
- **LEDS:** RA>80, R9>0, Long-life, high-efficacy.
- **Control:** Photocell Sensor Base(Option).
- **Lifespan:** L70 ≥ 50,000 hours.
- **Operating temperature:** -4°F~104°F.
- **Certifications:** ETL Listed, FCC, DLC 5.1 Premium.
- **Warranty:** Five years Warranty.

sales@edipai.com +86 13923889456 www.edipai.com

Order Information

Dimensions	Part No.	3 Powers or 5 Powers Adjustable	Luminous Efficacy @Max Power 5000K	Luminous Flux @Max Power 5000K	Input Voltage	CCT
10.0 x 10.0 x 3.0 Inch	EDI-CL-32W G5	10W-15W-20W-25W-32W	158 lm/W	5000 lm	120-277V 120-347V	2CCT 3CCT 6CCT
	EDI-CL-40W G5	20W-25W-32W-35W-40W	150 lm/W	6000 lm		
	EDI-CL-50W G5	20W-25W-32W-40W-50W		7500 lm		
	EDI-CL-65W G5	20W-32W-40W-50W-65W	154 lm/W	10000 lm		
	EDI-CL-70W G5	20W-32W-40W-50W-70W	150 lm/W	10500 lm		
	EDI-CL-80W G5	32W-50W-65W-70W-80W	150 lm/W	12000 lm		
	EDI-CL-90W G5	32W-65W-70W-80W-90W		13500 lm		
	EDI-CL-100W G5	32W-65W-80W-90W-100W		15000 lm		

PRODUCT DIMENSIONS

EDI-CL-32W G5 EDI-CL-40W G5 EDI-CL-50W G5 EDI-CL-65W G5 EDI-CL-80W G5 EDI-CL-90W G5 EDI-CL-100W G5 10.0 x 10.0 x 3.0 Inch	

sales@edipai.com +86 13923889456 www.edipai.com

EDIPAI
Premium Lighting Manufacturer

LED CANOPY LIGHT G5 SERIES

Parameters

		CL-32W G5	CL-40W G5	CL-50W G5	CL-65W G5	CL-80W G5	CL-90W G5	CL-100W G5
Key Parameters	Max Wattage	32W	40W	50W	65W	80W	90W	100W
	Efficacy	158 lm/W	150 lm/W	150 lm/W	154 lm/W	150 lm/W	150 lm/W	150 lm/W
	Luminous Flux	5000 lm	6000 lm	7500 lm	10000 lm	12000 lm	13500 lm	15000 lm
	Dimension	10.0 x 10.0 x 3.0 Inch						
	Control	Photocell Sensor Base (Option)						
	Dimming	0-10V						
Certifications	Safety / DLC	ETL , DLC 5.1 PREMIUM						
Photo metric	CCT	1CCT , 3CCT , 6CCT						
	SDCM	≤6						
	Beam Angle	120°						
	Ra / R9 / Duv	RA>80 , R9>0 , Duv ≤ 0.006						
Electrical	Driver Brand	BECKY(BQ)						
	Input Voltage	100-277V(standard) , 120-347V (Option)						
	Input Current	Max 0.32A	Max 0.4A	Max 0.5A	Max 0.65A	Max 0.8A	Max 0.9A	Max 1.0A
	Frequency	50/60Hz						
	THD / PF	THD ≤ 20% , PF ≥ 0.9						
	Surge Protection	6KV(standard) , 10KV Surge Protection Device (Option)						
Lifetime	L70 / L90	L70 ≥ 50000 Hours , L90 ≥ 36000 Hours						
	Warranty	5 Years						
Construction	Housing	Die-cast Aluminum Housing & Driver Housing						
	Optical-Lens	PC Lens						
Operation	Operating Temp	-4℉ - 104℉						
	Storage Temp	-22℉ - 140℉						
	Environment	Outdoor						
	IP Rating	IP65 Rating						

Packing / weight

Model	Outer Box (L x W x H)	Qty/Ctn (pcs)	G. W/Ctn (lbs)	Container 40HQ
EDI-CL-32W G5 EDI-CL-40W G5 EDI-CL-50W G5 EDI-CL-65W G5 EDI-CL-80W G5 EDI-CL-90W G5 EDI-CL-100W G5	450 x 280 x 280 mm 20.7 x 11.8 x 11.8 inch	5	15.0 KG 33 LBS	6500 pcs

Warranty

This product has a warranty of period of 5 years from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering or removal of the Q.C. and/or date label, usage in improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit. Manufacturer does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Manufacturer reserves the right to alter specifications without prior notice.

Note

1. The installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The thermally insulating material is not allowed to cover the fixture.
4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
5. Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.

sales@edipai.com +86 13923889456 www.edipai.com