# LED WRAPAROUND

JEELIGHTING

# J-WRAP ®



## FEATURES AND SPECIFICATIONS

### Construction

- 4FT LED Wraparound
- Made with durable commercial grade steel and plastic materials for long-lasting performance

### Electrical

- Input Voltage: 120-277VAC
- Compatible with standard 0-10V dimmer
- Motion sensor optional

### Applications

- Offices, retail, schools, restaurants, healthcare, residential and hospitality applications

### Installation

- Ceiling or J-box installation in general application, hanging is optional

### Installation

- Comply with the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2No.250.0) and are identified with the cETL Listed Mark Design Lights Consortium *(DLC)Premium.

### Warranty

- 5 years warranty


| Specs at a Glance | * Nominal Wattage (Switchable) |
|---|---|
| Configuration | ST4F-45PDNC |
| CCT (K) | 3500 -4000 -5000 -5700 -6500K Selectable |
| Wattage (W) | 20W-30W-40W adjustable |
| Lumens (lm) | max.5000lm |
| Efficacy (LPW) | 125lm/w |
| Size | 4FT |
| CRI | >80 |
| Input Voltage | 120-277V |
| Operating Temp | -20°C-45°C |
| Certifications | ETL&DLC 5.1 Premium |
| Warranty | 5-year limited warranty |

# LED WRAPAROUND


JEELIGHTING


## Ordering information

| Brand | Size | Wattage xxxW | CCT"P" | Blank"N" | Input Voltage |
|---|---|---|---|---|---|
| Jee Lighting | 4F<br>4FT | 40<br>20W/30W/40W | P= CCT Selectable<br>3500K-4000K-<br>5000K-5700K-<br>6500K | M<br>Motion Sensor<br>N<br>Non-montion&emergency | C=120-277V |

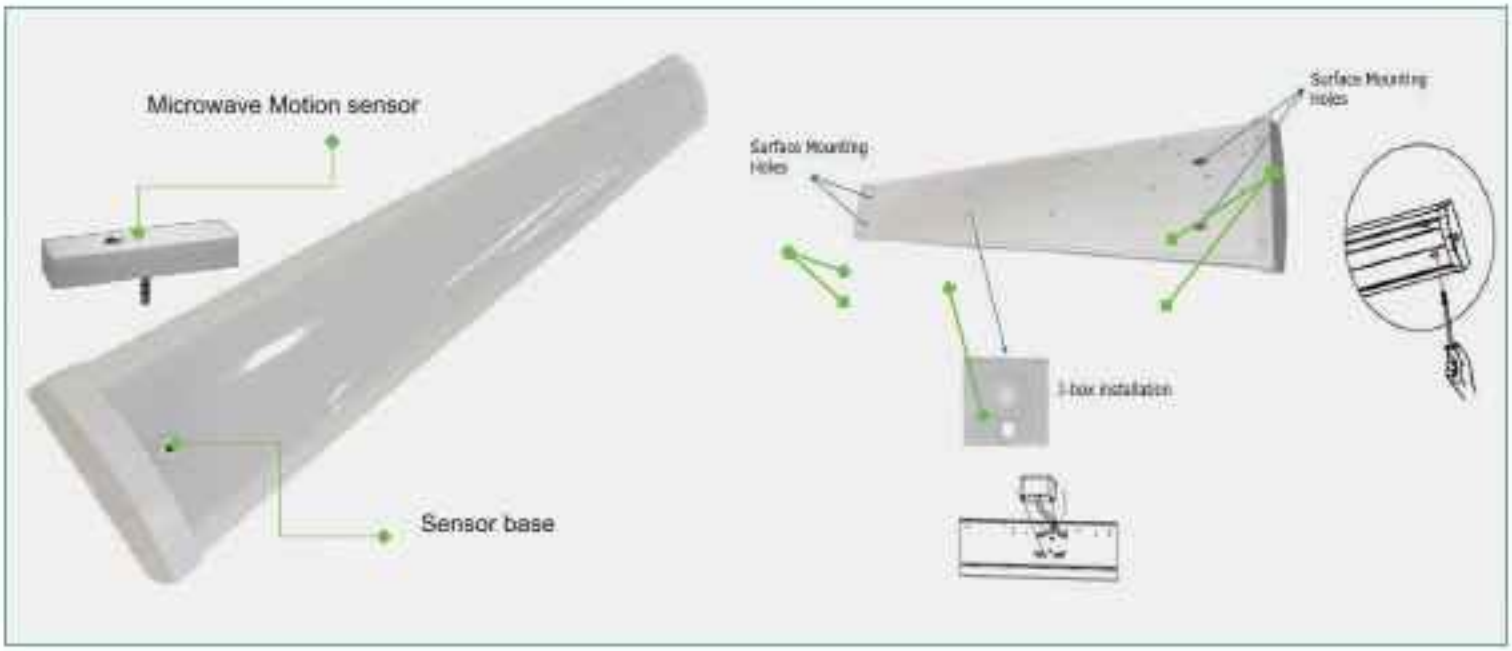


## Dimensions

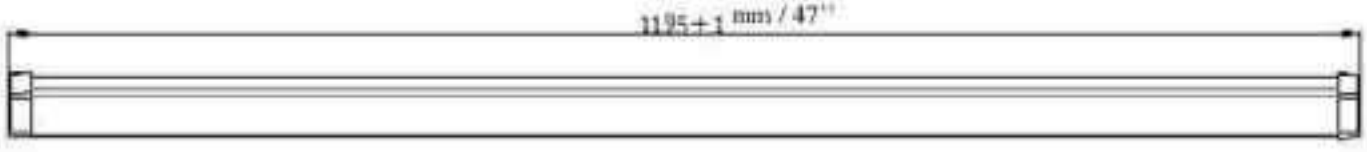

# LED WRAPAROUND

JEELIGHTING

## ACCESSORIES



### Microwave sensor

- Frequency: 5.8GHz+/- 75MHz
- Microwave Power: <0.3mW
- Installation Height: 4m/13.12Max
- Detection Distance: >3m/9ft
- Detection Angle: 30-150(without glass cover)




### Sensor controller

- Operation Distance Max: 15m/49ft(3V)
- Emission Angle: <30 degree
- Function:On/off,mounting height,detection area,daylight threshold,standy dim level,holdtime,brightness adjustable, daylight harvesting
(Read the manual to know the steps of setting)


## INSTALLATIONS

**WARNING: Turn off power at fuse or circuit breaker before installing.**




Open the covers at both ends of the lamp.remove the PC cover, and then take outthe installation accessories.(If there is a sensor, you need to removethe terminal wire)

1. Remove the PC cover

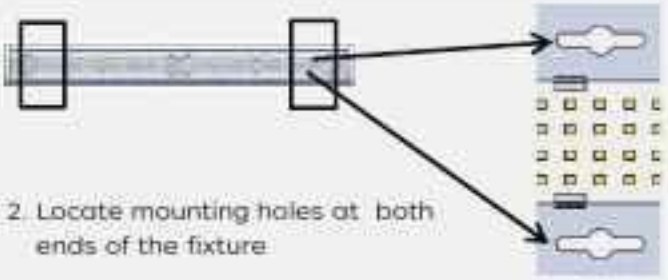

2. Locate mounting holes at both ends of the fixture

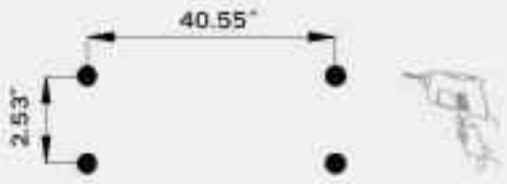



3. Use an electric drill to drill holes in



4. Tap the expansion screw into the hole as shown

# LED WRAPAROUND

JEELIGHTING

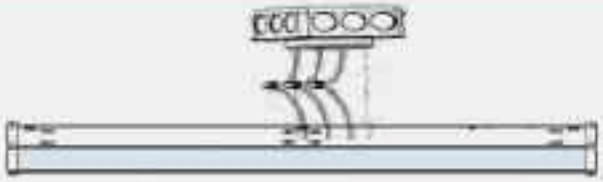

5.Wiring. (L to Live, N to Neutral, G to Ground)



6. Fix the fixture to the remaining four holes with



7.Take the PC cover and install it on one end of the




Plastic Clips on Ends



Sensor Connector


**WARNING: Turn off power at fuse or circuit breaker before installing. Linkable function available from factory**

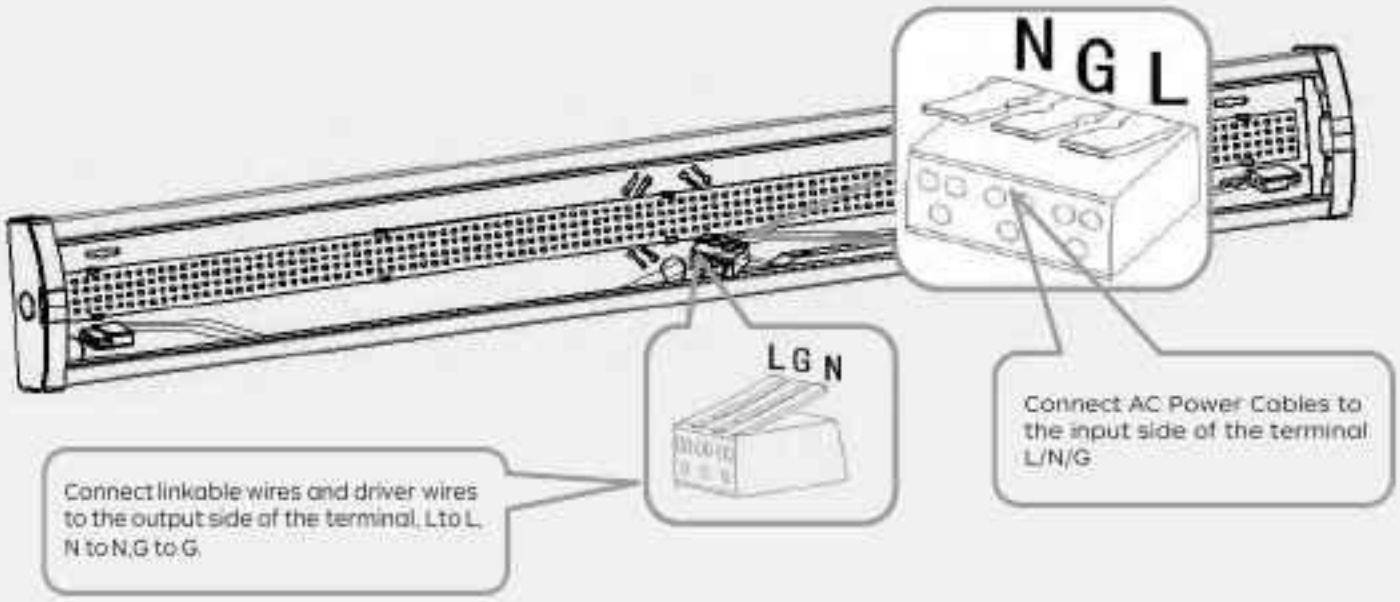

# LED WRAPAROUND

JEELIGHTING

| | |
|---|---|
| Connection: Plug the male/female connector from the previous light to the female/male connector of the next light. | Connection:<br>The Linear Strips can be connected Max.450W. |
| | Max. Connection:<br>4FT: 10pcs |

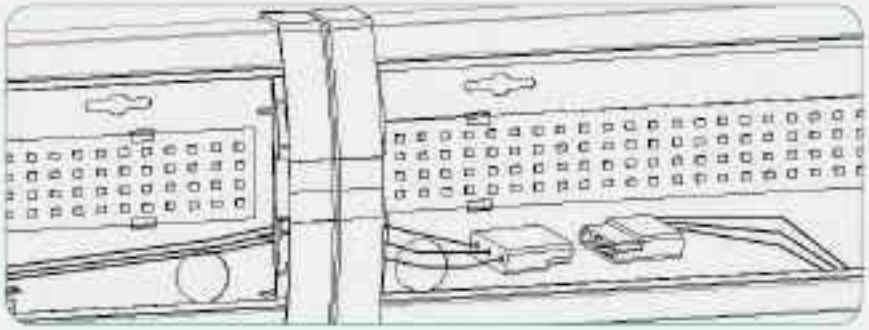

## Packing Info



1pcs in an inner box



4pcs in an outer box

| SIZE | 4PCS/CARTON | | | CONTAINER | | |
|---|---|---|---|---|---|---|
| | DIMENSION(INCH) | N.W(LBS) | G.W(LBS) | 20'GP(PCS) | 40'GP(PCS) | 40HQ(PCS) |
| 4FT | 47.83"x11.81"x5.98 | 8.08 | 10 | 2024 | 4116 | 4912 |