


5 Years warranty | 120° | Ra>80 R9>0 | c UL us LISTED | Dimmable 0-10V | DLC Premium

Product Features

- **Construction:** Traditional design, narrow body, Vapor Tight fixture, suitable for rugged, demanding applications
- **IP rating:** Ingress Protection rating of IP65 for dust and water.
- **Mounting:** Surface mounted and cable suspended available.
- **LEDs:** LED system with a life rating of ≥50,000 hours at L70 @25°C. Luminaire efficacy >140lm/W.
- **Electrical:** 120-277V/347V, 0-10V Dimming PF ≥0.9, THD≤20%.
- CCT: 1CCT/3CCT/5CCT Options.
- **Lens:** UV-stabilized, injection-molded, impact-resistant polycarbonate lens.
- **Certification:** ETL Listed. DLC Premium.
- **Warranty:** 5-year Limited warranty.

Dimension

Item	L×W×H (inch)
2 ft.	23.62" x 4.33" x 3.15"
4 ft.	47.24" x 4.33" x 3.15"
8 ft.	94.50" x 3.74" x 3.30"

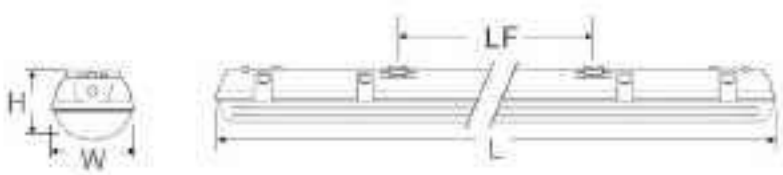

sales@edipai.com +86 13923889456 www.edipai.com

Order Information

Length	Part No.	Power	Efficacy	Flux	DLC5.1P
2FT	**EDI-VP-2FT10W-xxK G4**	5W-8W-10W	140 lm/W	1400 lm	Linear Ambient
	EDI-VP-2FT15W-xxK G4	6W-10W-15W		2100 lm	
	EDI-VP-2FT20W-xxK G4	10W-15W-20W		2800 lm	
	EDI-VP-2FT26W-xxK G4	10W-20W-26W		3640 lm	
	EDI-VP-2FT30W-xxK G4	10W-20W-30W		4200 lm	
	EDI-VP-2FT40W-xxK G4	15W-25W-40W		5600 lm	Low bay
4FT	**EDI-VP-4FT12W-xxK G4**	6W-9W-12W	140 lm/W	1680 lm	Linear Ambient
	EDI-VP-4FT18W-xxK G4	8W-12W-18W		2520 lm	
	EDI-VP-4FT26W-xxK G4	10W-20W-26W		3640 lm	
	EDI-VP-4FT32W-xxK G4	10W-20W-32W		4480 lm	
	EDI-VP-4FT40W-xxK G4	10W-20W-30W-35W-40W		5600 lm	Low bay
	EDI-VP-4FT50W-xxK G4	25W-30W-35W-40W-50W		7000 lm	
	EDI-VP-4FT60W-xxK G4	30W-35W-40W-50W-60W		8400 lm	
	EDI-VP-4FT70W-xxK G4	30W-40W-50W-60W-70W		10000 lm	Low bay High bay
	EDI-VP-4FT80W-xxK G4	40W-50W-60W-70W-80W		11200 lm	High bay
8FT	**EDI-VP-8FT24W-xxK G4**	15W-20W-24W	140 lm/W	3360 lm	Linear Ambient
	EDI-VP-8FT40W-xxK G4	20W-25W-30W-35W-40W		5600 lm	Low bay
	EDI-VP-8FT55W-xxK G4	24W-30W-40W-45W-55W		7700 lm	
	EDI-VP-8FT60W-xxK G4	30W-35W-40W-50W-60W		8400 lm	
	EDI-VP-8FT70W-xxK G4	30W-40W-50W-60W-70W		10000 lm	Low bay High bay
	EDI-VP-8FT80W-xxK G4	18W-24W-60W-70W-80W		11200 lm	High bay
	EDI-VP-8FT90W-xxK G4	40W-50W-60W-70W-90W		12600 lm	
	EDI-VP-8FT100WP-xxK G4	50W-70W-80W-90W-100W		14000 lm	
	EDI-VP-8FT125WP-xxK G4	60W-80W-90W-100W-125W		17500 lm	
	EDI-VP-8FT150WP-xxK G4	70W-90W-100W-125W-150W		21000 lm	

sales@edipai.com +86 13923889456 www.edipai.com

Specifications

		2ft	4ft	8ft
Key Parameters	Ingress Protection	IP65 Rating	IP65 Rating	IP65 Rating
	Dimensions	23.62" x 4.33" x 3.15"	47.24" x 4.33" x 3.15"	94.50" x 3.74" x 3.30"
	Voltage	100-277V / 347V	100-277V / 100-347V	100-277V / 100-347V
	Dimmable	0-10V	0-10V	0-10V
Certifications	DLC Premium	Linear Ambient Low Bay	Linear Ambient Low Bay	Low Bay / High Bay
	Safety	ETL		
Photo metric	CCT	1CCT/3CCT/5CCT		
	SDCM	≤6		
	Beam Angle	120°		
	Ra	>80		
	R9	>0		
	Duv	≤ 0.006		
Electrical	Rated Voltage	100-277V / 100-347V		
	Frequency	50/60Hz		
	THD	≤ 20%		
	Surge Protection	2KV		
	Power Factor	≥ 0.9		
Lifetime	L70	≥ 50000		
	L90	≥ 36000		
	Warranty	5 Years		
Operation	Start Time	≤ 1S		
	Operating Temp	-4℉ - 104℉		
	Storage Temp	-22℉ - 140℉		
	Housing/Case	PC		
	Optical-Lens	PC Frosted /Clear		
	Environment	Indoor / Outdoor		
	Ingress Protection	IP65 Rating		

sales@edipai.com +86 13923889456 www.edipai.com

Packing / weight

Size	Outer box (L*W*H)	Qty/Ctn (pcs)	G.W-Ctn (lbs)	Container 20GP(28 ㎥)	Container 40HQ(68 ㎥)	Container 45HQ(78 ㎥)
2ft	25.2 x 13.2 x 7.9 in 640 x 335 x 200 mm	6	17.6	3000 pcs	8500 pcs	9800 pcs
4ft	48.8 x 13.2 x 7.9 in 1240 x 335 x 200 mm	6	28.7	1500 pcs	4400 pcs	5000 pcs
8ft	96.1 x 7.5 x 7.9 in 2440 x 190 x 200 mm	4	34.8	880 pcs	3200 pcs	3700 pcs

Warranty

This product has a warranty of period of 5 years from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering or removal of the Q.C. and/or date label, usage in improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit. Manufacturer does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Manufacturer reserves the right to alter specifications without prior notice.

Note

1.The installation and maintenance must be completed by electricians or professionals.
2.Please cut off the power before installation and maintenance.
3.The thermally insulating material is not allowed to cover the fixture.
4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
5.Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.

sales@edipai.com +86 13923889456 www.edipai.com