

Product Features

Installation: Designed by the Contractor,Easier to Handle,Faster to Install.

Construction: Housing constructed of code-gauge, die-formed, cold-rolled steel.

LED System: LED system with a life rating of ≥50,000 hours at L70 @25°C. Luminaire efficacy up to 130 LPW. Electrical: 120V-277 ACV/100-347 ACV. PF ≥90%, THD≤20%.

Dimming: 0-10V dimming Option

Color Characteristics: CRI>80; CCT: 3000K/4000K/5000K/6500K


Optics: Type V distribution with a clear etched polycarbonate lens.

Certification: ETL Listed. DLC Premium.

Warranty: Limited 5-year warranty.

Dimension

Item	L×W×H (inch)
	24"x5.1"x1.9"
4FT	48"x5.1"x1.9"

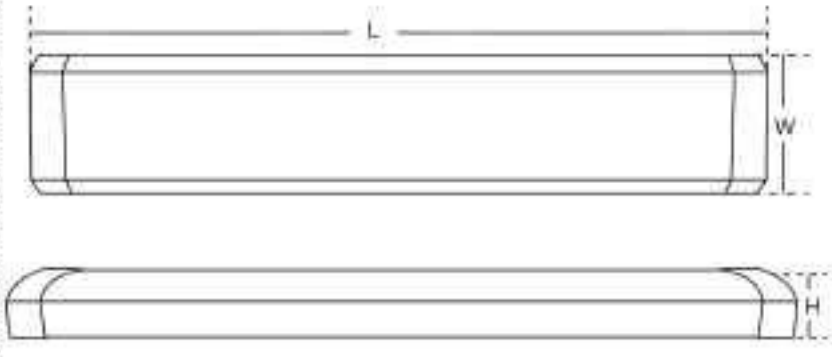

sales@edipai.com
+86 13923889456
www.edipai.com

Order Information

Length	Part No.	Max Power	Luminous Flux	Luminous Efficacy	Input Voltage	DLC
2FT	EDI-WP-2FT10W-xxK G1	6W-8W-10W	1300 lm	130 lm/W	100-277V 100-347V	Linear Ambient
	EDI-WP-2FT20W-xxK G1	10W-15W-20W	2600 lm			
	EDI-WP-2FT26W-xxK G1	15W-20W-26W 10W-12W-15W-20W-26W	3380 lm			
	EDI-WP-2FT30W-xxK G1	15W-20W-30W 10W-15W-20W-26W-30W	3900 lm			
4FT	EDI-WP-4FT26W-xxK G1	15W-20W-26W 10W-12W-15W-20W-26W	3380 lm	130 lm/W	100-277V 100-347V	Linear Ambient
	EDI-WP-4FT32W-xxK G1	15W-20W-32W 10W-15W-20W-26W-32W	4160 lm			
	EDI-WP-4FT42W-xxK G1	20W-30W-42W 15W-20W-30W-35W-42W	5460 lm			Low Bay
	EDI-WP-4FT60W-xxK G1	30W-40W-60W 20W-30W-40W-50W-60W	7800 lm			
	EDI-WP-4FT70W-xxK G1	40W-50W-70W 30W-40W-50W-60W-70W	10000 lm	143 lm/W		High Bay

Specifications


		2FT	4FT
	Dimensions	24"x5.1"x1.9"	48"x5.1"x1.9"
	Voltage	100-277 ACV / 100-347 ACV	
	Efficacy	130 lm/W	
Certifications	DLC Premium	Linear, Low Bay , High Bay	
	Safety	ETL	
Control Feature	Dimming Status	Continuous Dimming to 10% or below	
	Communication Protocol	0-10V Wired Communication Protocol (Option)	
	Integral Controls	Has Integral Controls (Option)	
	Sensor Type	Occupancy sensor, Daylight dimming (Option)	
Photo metric	CCT	3500K-6500K	
	SDCM	≤6	
	Beam Angle	120°	
	Ra	>80	
	R9	>0	
	Duv	≤ 0.006	
	Rated Voltage	100-277 ACV / 100-347 ACV	
	Frequency	50/60Hz	
	THD	≤ 20%	

sales@edipai.com +86 13923889456 www.edipai.com

	Surge Protection	2KV
	Power Factor	≥ 0.9
	Flicker	Flicker Free (Option)
Lifetime	L70	≥ 50000
	L90	≥ 36000
	Warranty	5 Years
Operation	Start Time	≤ 1S
	Operating Temp	-4℉ - 104℉
	Storage Temp	-22℉ - 140℉
	Housing/Case	Steel
	Optical-Lens	PC Frosted /Clear
	Environment	Indoor
	Ingress Protection	IP22 Rating


Installation guide


A: Surface mount

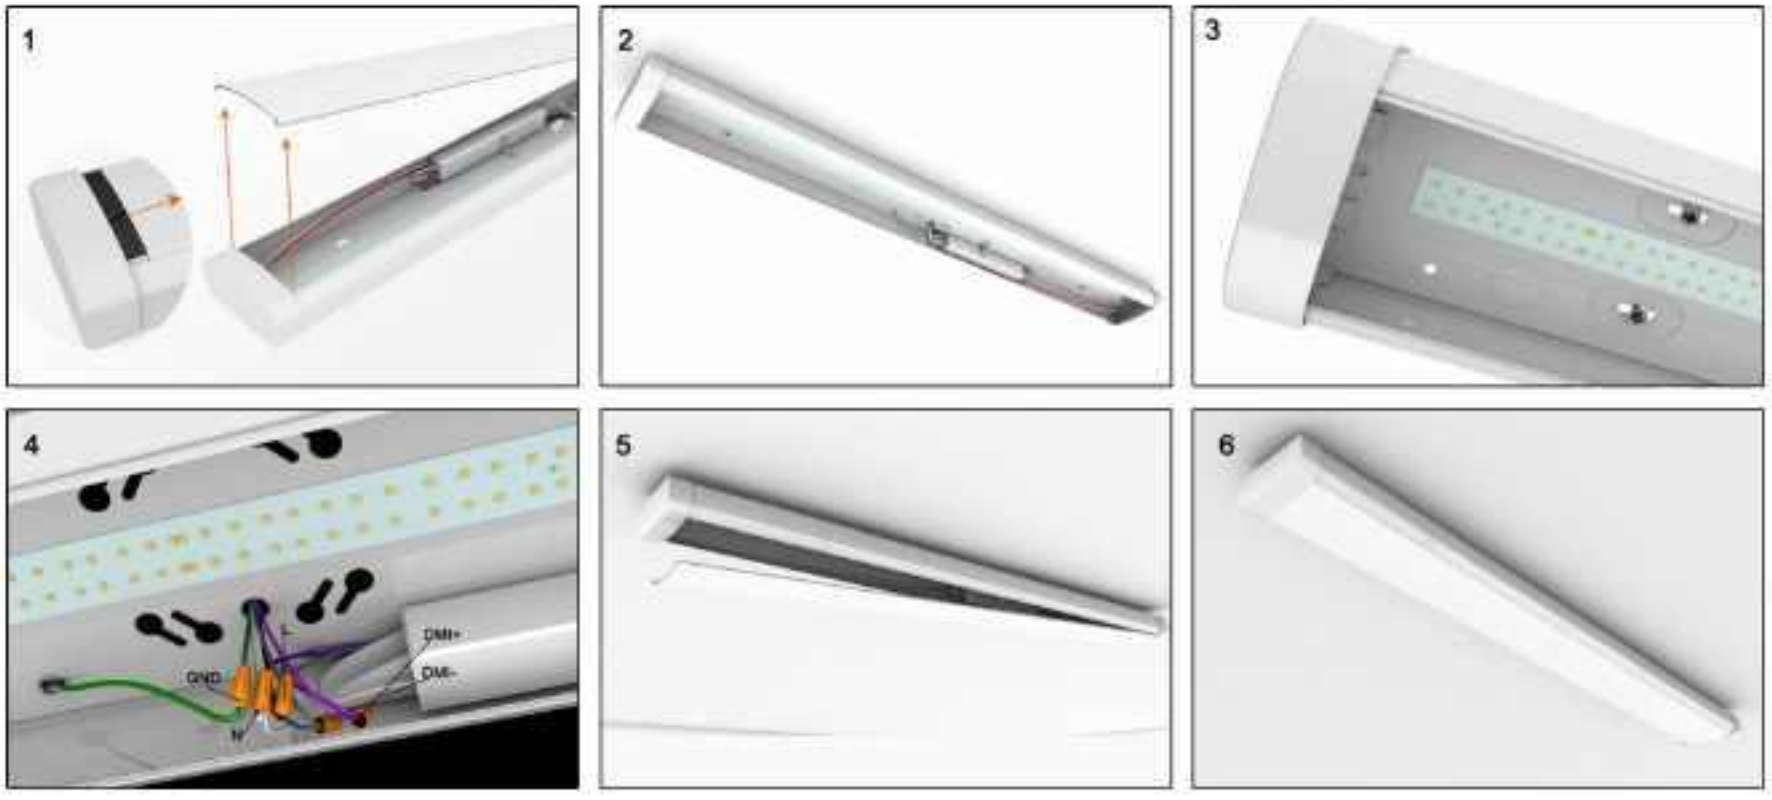


B: Suspension

sales@edipai.com +86 13923889456 www.edipai.com

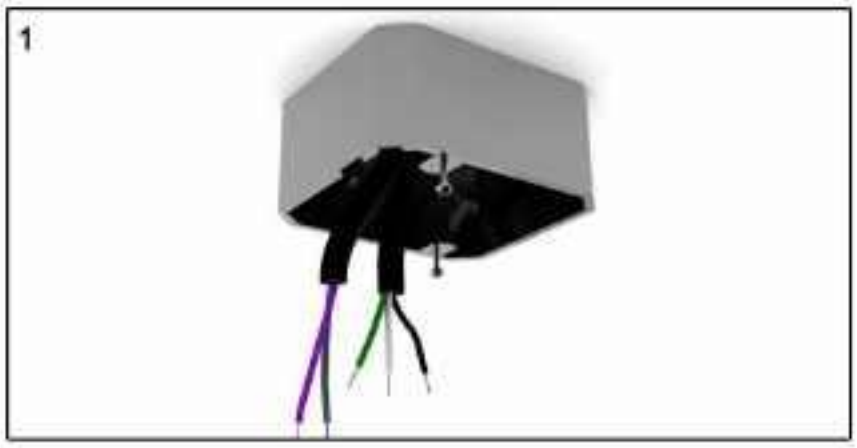

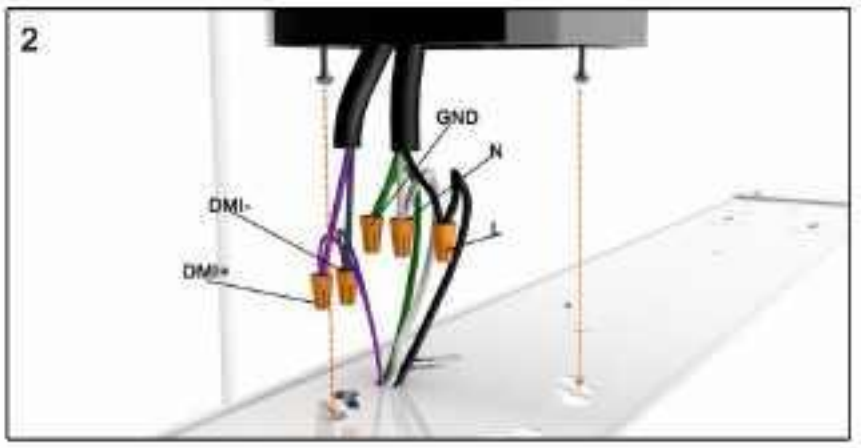

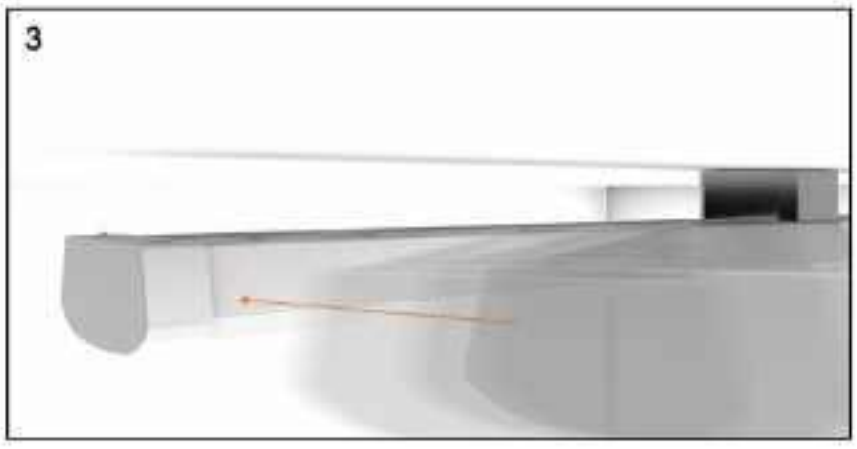



Packing information

Size	Qty/Ctn (pcs)	Outer box (in)	G.W/Ctn (lbs.)
2ft	6	25.6x13.2x9.8	30 lbs
4FT	6	49.6x13.2x9.8	55 lbs

Note

1.The installation and maintenance must be completed by electricians or professionals.

2.Please cut off the power before installation and maintenance.

3.The thermally insulating material is not allowed to cover the fixture.

4.Please keep away from the corrosive substance, and keep the fixture dry and clean.

5.Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.

sales@edipai.com +86 13923889456 www.edipai.com