

Product Features

Construction

- Housing: durable steel construction
- Finish: powder coated, post-painted white
- Large wiring compartment and multiple knock-outs to accommodate lighting controls

Electrical

- 3 Powers / 5 Powers Selectable Option
- 120-277/120-347V 0-10V dimming
- Easy-to-access wiring compartment
- System rated for long 50,000 hour life
- Efficiently delivers >130 LPW


Optics

- 3 CCTs / 5 CCTs Selectable Option
- High impact, acrylic lens comes standard to protect the LEDs and minimize glare
- Delivers bright, white light and excellent uniformity

Certification: ETL Listed. DLC Premium.
Warranty: 5-year Limited warranty.

Dimension

Item	L×W×H (inch)
2FT	24" x 10" x 3.2"
4FT	48" x 10" x 3.2"

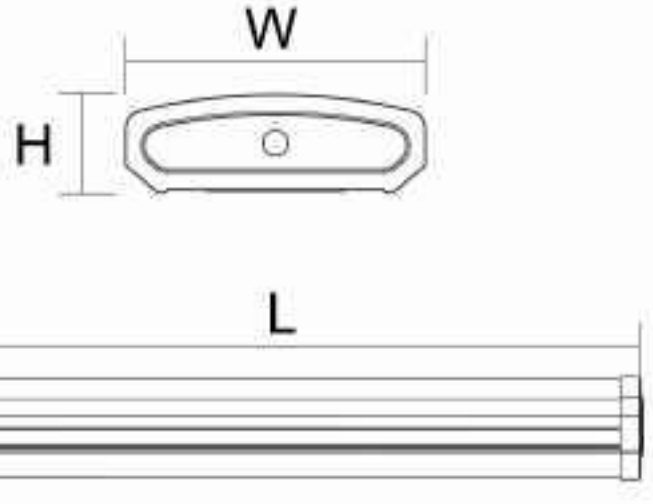

sales@edipai.com
+86 13923889456
www.edipai.com

Order Information

Part No.	Length	Power Selectable	Luminous Efficacy	Luminous Flux	Input Voltage
EDI-WP-2FT10W G3	2ft	8W-9W-10W	130 lm/W	1300 lm	120-277V 100-347V
EDI-WP-2FT15W G3		10W-12W-15W		1950 lm	
EDI-WP-2FT20W G3		10W-15W-20W		2600 lm	
EDI-WP-2FT25W G3		10W-15W-25W 10W-15W-18W-22W-25W		3250 lm	
EDI-WP-2FT30W G3		15W-20W-30W 15W-18W-22W-25W-30W		3900 lm	
EDI-WP-2FT35W G3		15W-25W-35W 15W-20W-25W-30W-35W		4550 lm	
EDI-WP-2FT40W G3		15W-30W-40W 15W-25W-30W-35W-40W		5200 lm	
EDI-WP-4FT15W G3	4ft	10W-12W-15W	130 lm/W	1950 lm	120-277V 100-347V
EDI-WP-4FT20W G3		10W-15W-20W		2600 lm	
EDI-WP-4FT26W G3		10W-15W-26W 10W-15W-18W-22W-26W		3250 lm	
EDI-WP-4FT30W G3		15W-20W-30W 15W-18W-22W-25W-30W		3900 lm	
EDI-WP-4FT35W G3		15W-25W-35W 15W-20W-25W-30W-35W		4550 lm	
EDI-WP-4FT40W G3		15W-30W-40W 15W-20W-30W-35W-40W		5200 lm	
EDI-WP-4FT45W G3		15W-30W-45W 15W-20W-30W-35W-45W		5850 lm	
EDI-WP-4FT50W G3		15W-40W-50W 15W-20W-30W-40W-50W		6500 lm	
EDI-WP-4FT60W G3		15W-40W-60W 15W-25W-40W-50W-60W		7800 lm	
EDI-WP-4FT70W G3		20W-50W-70W 20W-40W-50W-60W-70W	143 lm/W	10010 lm	

sales@edipai.com +86 13923889456 www.edipai.com

Specifications

		2ft	4ft
	Dimensions	24" x 10" x 3.2"	48" x 10" x 3.2"
	Voltage	120-277V / 120-347V	
Certifications	DLC Premium	Low Bay	
	Safety	ETL	
Control Feature	Dimming Status	Continuous Dimming to 10% or below	
	Communication Protocol	0-10V Wired Communication Protocol (Option)	
	Integral Controls	Has Integral Controls (Option)	
	Sensor Type	Occupancy sensor, Daylight dimming (Option)	
Photo metric	CCT	3CCTs(3500K-4000K-5000K) , 5CCTs (3000K-3500K-4000K-5000K-6500K)	
	SDCM	≤6	
	Beam Angle	120°	
	Ra	>80	
	R9	>0	
	Duv	≤ 0.006	
	Rated Voltage	100-277 ACV / 100-347 ACV	
	Frequency	50/60Hz	
	THD	≤ 20%	
	Surge Protection	2KV	
	Power Factor	≥ 0.9	
	Flicker	Flicker Free (Option)	
Lifetime	L70	≥ 50000	
	L90	≥ 36000	
	Warranty	5 Years	
Operation	Start Time	≤ 1S	
	Operating Temp	-4℉ - 104℉	
	Storage Temp	-22℉ - 140℉	
	Housing/Case	Steel	
	Optical-Lens	PC Frosted /Clear	
	Environment	Indoor	
	Ingress Protection	IP22 Rating	

sales@edipai.com +86 13923889456 www.edipai.com

Packing information

Module	Qty/Ctn (pcs)	Outer box (in)	G.W/Ctn (lbs.)
EDI-WP-2FT10W G3 EDI-WP-2FT15W G3 EDI-WP-2FT20W G3 EDI-WP-2FT25W G3 EDI-WP-2FT30W G3 EDI-WP-2FT35W G3 EDI-WP-2FT40W G3	5	24.2x11x18 inch	32LB
EDI-WP-4FT10W G3 EDI-WP-4FT15W G3 EDI-WP-4FT20W G3 EDI-WP-4FT25W G3 EDI-WP-4FT30W G3 EDI-WP-4FT35W G3 EDI-WP-4FT40W G3 EDI-WP-4FT50W G3 EDI-WP-4FT60W G3 EDI-WP-4FT70W G3	5	48.2x11x18 inch	55LB

Note

1.The installation and maintenance must be completed by electricians or professionals.

2.Please cut off the power before installation and maintenance.

3.The thermally insulating material is not allowed to cover the fixture.

4.Please keep away from the corrosive substance, and keep the fixture dry and clean.

5.Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.

sales@edipai.com +86 13923889456 www.edipai.com