LED LINEAR STRIP LIGHT (SP07)

WATTAGES: 4FT/8FT, from 25W to 100W



The SP07 Linear Fixture Series includes, 4ft and 8ft designed to replace fluorescent strip lighting with its slim & high quality design, integrated controls options and innovative mounting accessories.

Product Features:

- High Efficacy: 150LPW;
- AC120-277/AC120-347V,Ra>80;
- Power & CCT adjustable;
- 4FT/8FT, from 25W to 100W;
- Easy installation,suspending mounting & surface mounted;
- Emergency backup and sensor optional;
- 5-years warranty.
- 5 Years Limited Warranty, Rated for 50,000 hours(Refer to your warranty documentation for more information.)


SPECIFICATION		
MODEL	SS-SP07-4FT60W	SS-SP07-8FT100W
WATTAGE	60/50/40/30/25W	100/90/80/60/40W
CCT	3500K/4000K/5000K/5700K/6500K	
LUMENS	9000LM(Max)	15000LM(Max)
CRI	Ra>80	
INPUT VOLTAGE	AC120-277V/AC120-347V	
POWER FACTOR	>0.90	
DRIVER EFFICACY	>90%	
DIMMING	0-10V	
LIFE SPAN	>50,000hrs	
WORKING TEMPENRATURE	-40℉~113℉	
STORAGE TEMPERATURE	-40℉~176℉	
WARRANTY	5 years limited	

LED LINEAR STRIP LIGHT (SP07)


WATTAGES: 4FT/8FT, from 25W to 100W

Product Dimension:

4FT

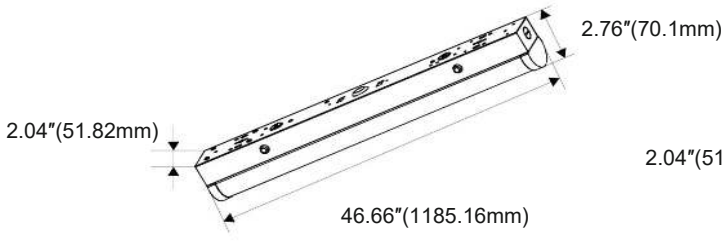

8FT

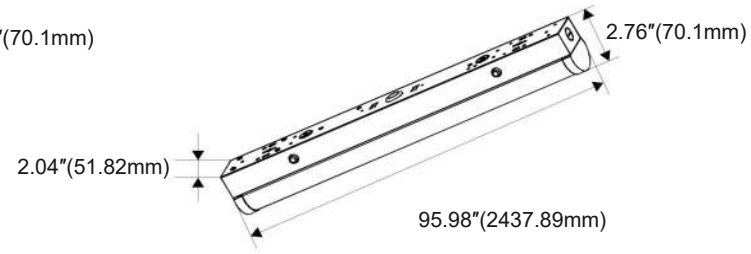

	Packing	Size	Net Weight	Gross Weight	pcs/ctn
4FT	Outer Packing Size	L47.13xW7.20xH9.84 inch L1197xW183xH250 mm	23.4Lbs(10.61Kg)	27.5Lbs(12.47Kg)	9pcs/ctn
8FT	Outer Packing Size	L96.46xW4.96xH7.09 inch L2450xW126xH180 mm	21.83Lbs(9.9Kg)	25.57Lbs(11.6Kg)	4pcs/ctn

Standard Accessories



Surface Mounted

Product Accessories(SOLD SEPARATELY):



Suspending Mounted



Connecter



For Linkable-Wire harness



External sensor




Remote controller



Emergency Battery

Power and CCT switchable:

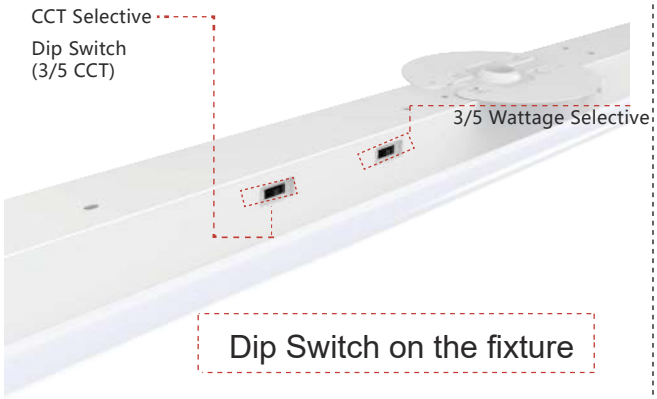

Sensor Base Solutions Avaliable:



Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-0755-21008727 | Fax: +86-0755-21008727 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com

LED LINEAR STRIP LIGHT (SP07)

WATTAGES: 4FT/8FT, from 25W to 100W

ORDERING GUIDE:

EXAMPLE:


SS-SP07-4FT40W-H-xx-T-Y

SS	SP07	4FT	40W	H	xx	T	Y
COMPANY	PRODUCT	Size	POWER	HIGH LUMENS	INPUT VOLTAGE	Tunable CCT and Power	CONTROL
Starlake	Strip Light		60W: 60/50/40/30/25W 100W: 100/90/80/60/40W		Blank=120-277Vac MV=120-347Vac	3500K/4000K/5000K /5700K/6500K	A = PIR sensor, B = MS sensor, C = BRT sensor, D = PHB sensor, blank = no provide sensor.


DISTRIBUTION

For complete IES files, please visit our website.

SS-SP07-4FT40W-H-TCP(XX)(40W, 5000K)

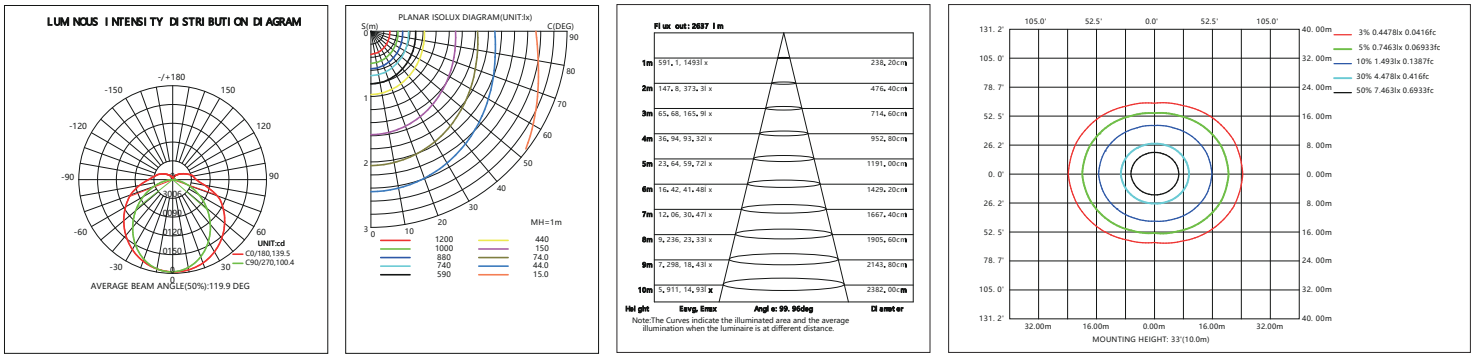

SS-SP07-4FT50W-H-TCP(XX)(50W, 5000K)

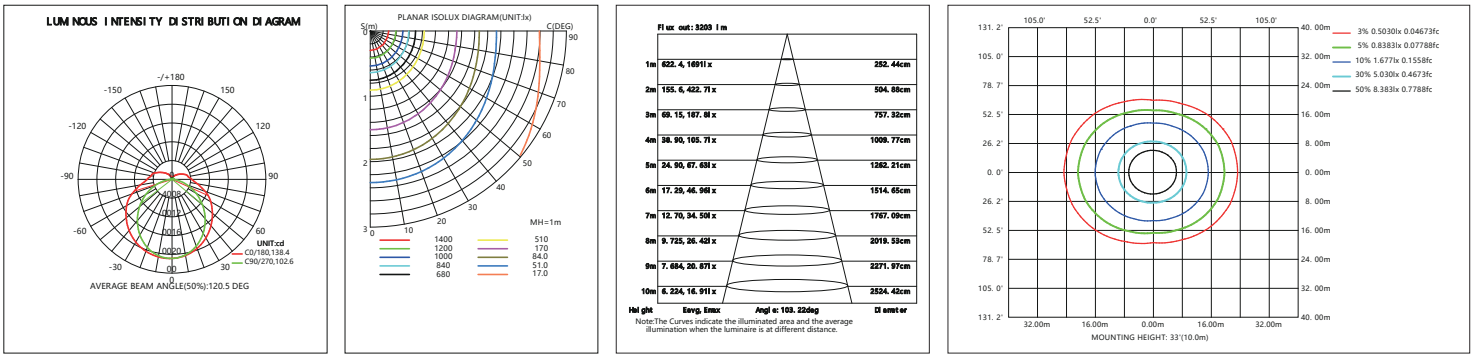


LED LINEAR STRIP LIGHT (SP07)


WATTAGES: 4FT/8FT, from 25W to 100W


Installation Instruction:

A. Surface-mounted installation

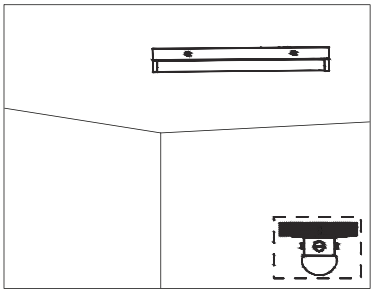


1.Punch a hole on the wall and put the expansion tube inside.







4FT:LF=34.80"
8FT:LF=35.35" & 84.13"


2.Turn off the power and wiring by using wire nuts.









3.Secure the fixture on the wall and lock it in tight.




4.Press upward the cover, push side button and press, then lock it with springs tightly which located into the fixture.




5.The installation completed.

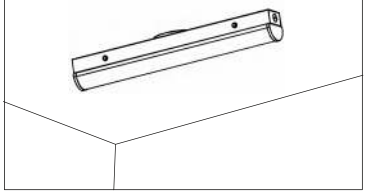


6.Press the buckle on both sides and remove, if you need to disassemble the cover.

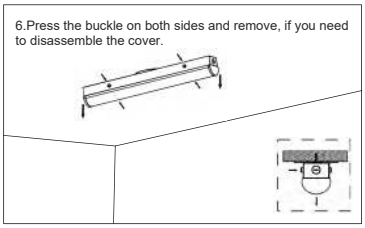

B. Suspending installation

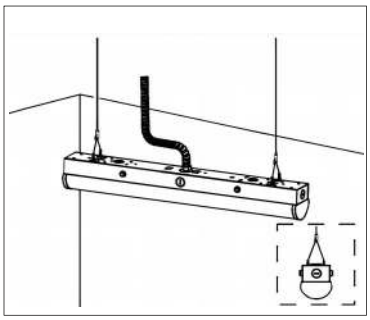


1.Fixing the hook and suspending the lamp.

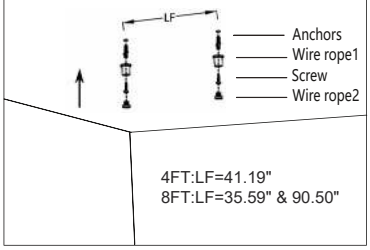


4FT:LF=41.19"
8FT:LF=35.59" & 90.50"


2.Adjusting the hanging rope length.




3.Adjusting the hanging rope making the LED linear strip light in a horizontal state.



4.Turn off the power and wiring by using wire nuts.

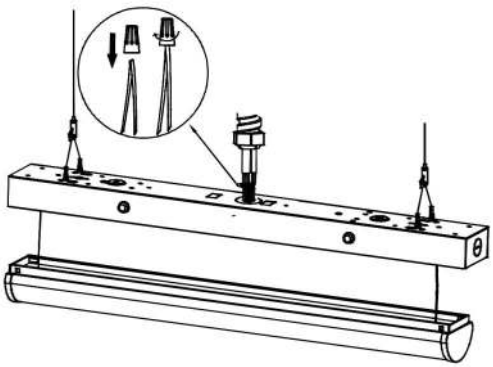




LED LINEAR STRIP LIGHT (SP07)


WATTAGES: 4FT/8FT, from 25W to 100W

SENSOR INSTALLATION:


1.Align the sensor probe with the square hole of the sensor housing and press it in.



2.Align the assembled sensor with the headphone pin hole on the light and insert it into it.

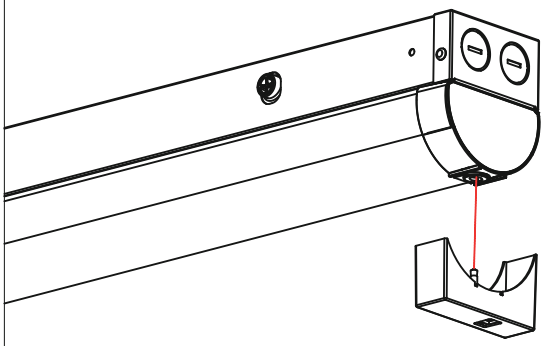


3.After installation, power on and the sensor works normally, indicating that the installation is complete.

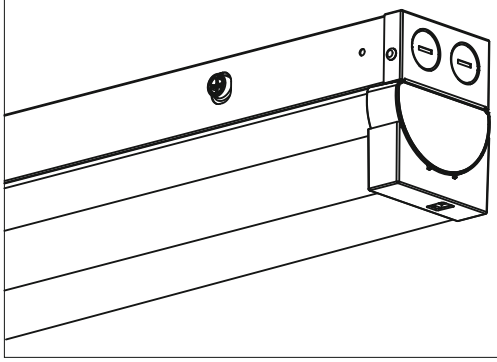


Linkable Connections

1. Remove the PC cover and remove the reserved mask on the end cover using a flat-head screwdriver.Remove the linkable wire from the reserved hole.

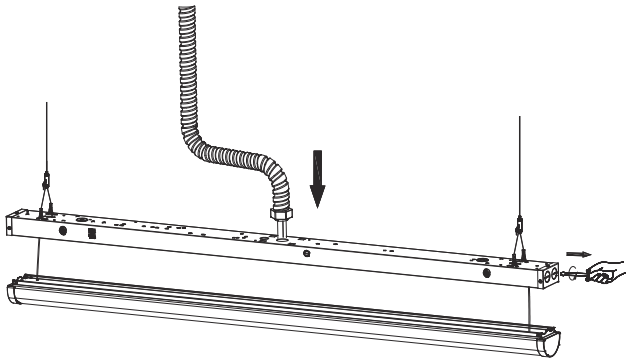


Catalog #	Max Qty of Linkable Connection
SP07-4FT	Up to 12 fixtures
SP07-8FT	Up to 6 fixtures


2. Take out the linkable wire of another fixture in the same way. Connect the linkable wire black to black, white to white, and green to green.

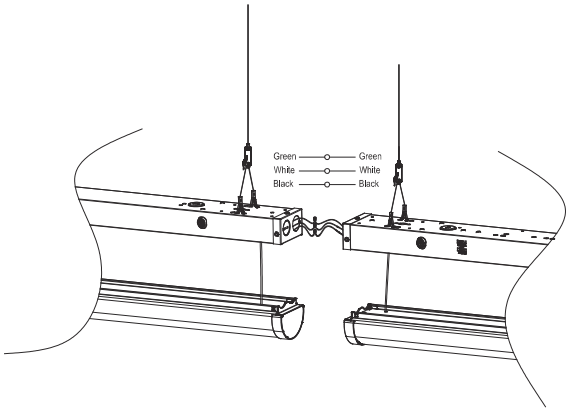


3. Insert the connected terminal into the fixture through the reserved hole.Take the lower end of the sling.

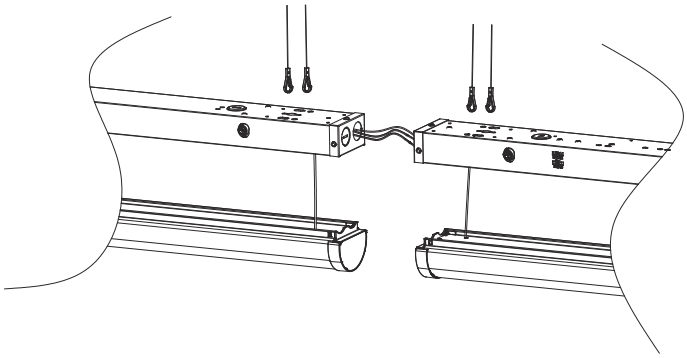

4. Cover the connector and lock the connector with self-tapping screws.

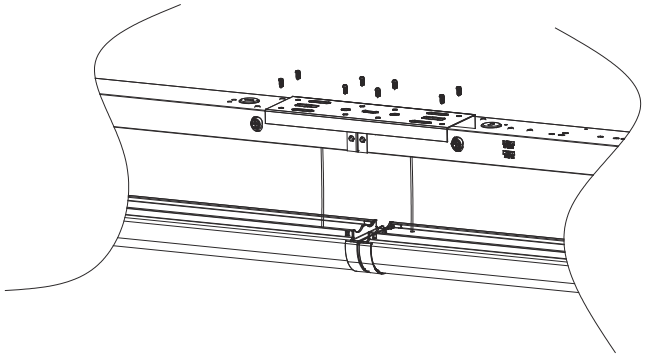

5. Hang the rope, fasten the PC cover, the installation is complete, and the can link the rest of the fixtures.

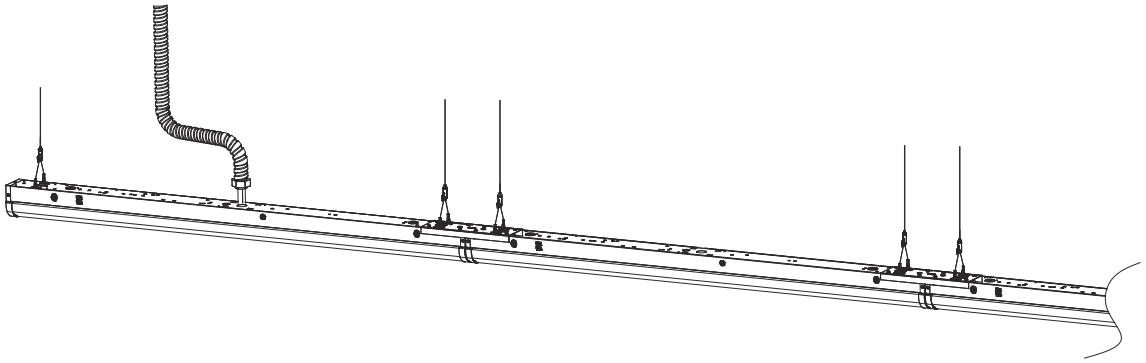

LED LINEAR STRIP LIGHT (SP07)

WATTAGES: 4FT/8FT, from 25W to 100W

Applications:

