
LED WALL PACK G4 SERIES



32W - 130W

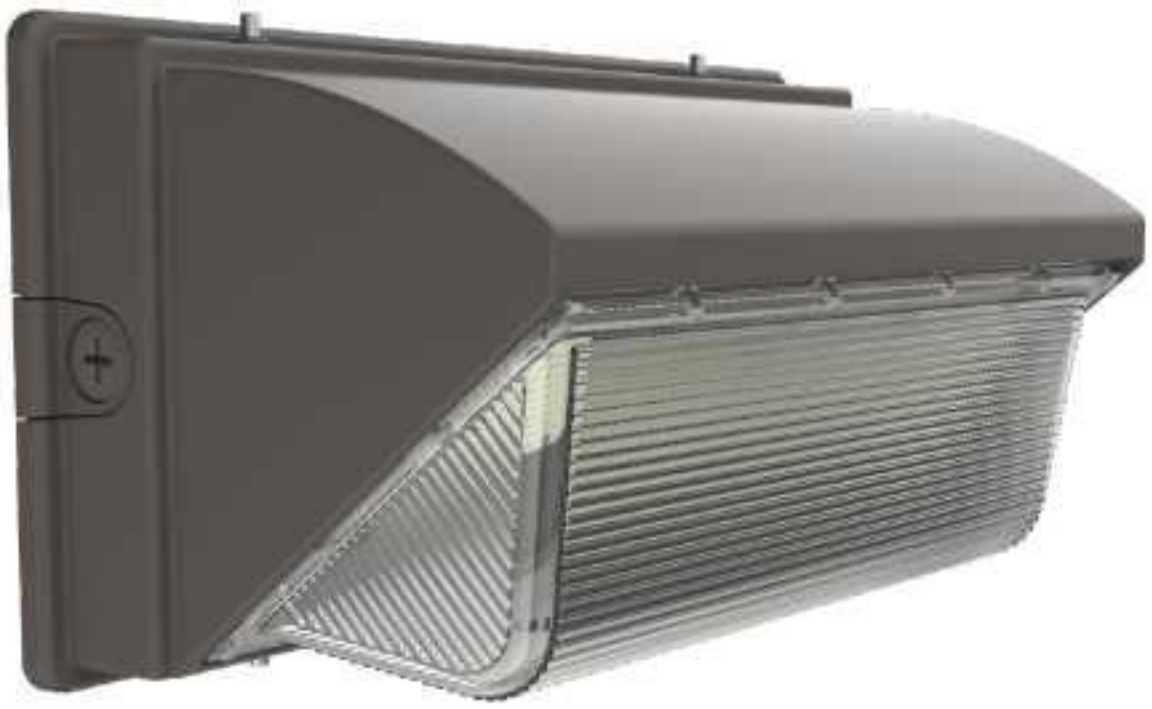

150W - 200W

FEATURES & SPECIFICATIONS

- **All in one:** 5 Power, 1/3 CCT Adjustable Option.
- **Construction:** Die-cast aluminum housing & Driver housing.
- **IP Rating:** LED light engine rated IP65.
- **Finish:** Powder coated, Bronze/Customized.
- **Driver:** BECKY 120-277V/120-347V Option, 0-10V Dimming.
- **LEDS:** RA>80, R9>0, Long-life, high-efficacy.
- **Control:** Photocell Sensor (ON/OFF).
- **Lifespan:** L70 ≥ 50,000 hours.
- **Operating temperature:** -4°F~104°F.
- **Certifications:** ETL Listed, FCC, DLC 5.1 Premium.
- **Warranty:** Five years Warranty.

sales@edipai.com +86 13923889456 www.edipai.com

Order Information


Part No.	5 Powers Adjustable	Luminous Efficacy @Max Power 5000K	Luminous Flux @Max Power 5000K	Input Voltage	CCT
EDI-WL-32W G4	10W-15W-20W-25W-32W	167 lm/W	5344 lm	120-277V 120-347V	1CCT 3CCT
EDI-WL-65W G4	25W-32W-40W-50W-65W	154 lm/W	10000 lm		
EDI-WL-80W G4	30W-40W-50W-65W-80W	150 lm/W	12500 lm		
EDI-WL-90W G4	35W-40W-65W-80W-90W		13500 lm		
EDI-WL-100W G4	40W-65W-80W-90W-100W		15000 lm		
EDI-WL-120W G4	50W-65W-80W-100W-120W		18000 lm		
EDI-WL-130W G4	50W-65W-80W-100W-130W	154 lm/W	20000 lm		
EDI-WL-150W G4	65W-80W-100W-130W-150W	150 lm/W	22500 lm		
EDI-WL-170W G4	65W-80W-100W-130W-170W	177 lm/W	30000 lm		
EDI-WL-180W G4	80W-100W-130W-150W-180W	150 lm/W	27000 lm		
EDI-WL-200W G4	80W-120W-150W-180W-200W	154 lm/W	30800 lm		

*** 3CCT: 4000K-5000K-6500K, 3500-4000K-5000K**

PRODUCT DIMENSIONS

EDI-WL-65W G4
EDI-WL-80W G4
EDI-WL-90W G4
EDI-WL-100W G4
EDI-WL-120W G4
EDI-WL-130W G4


12.3 x 11.3 x 5.4 Inch

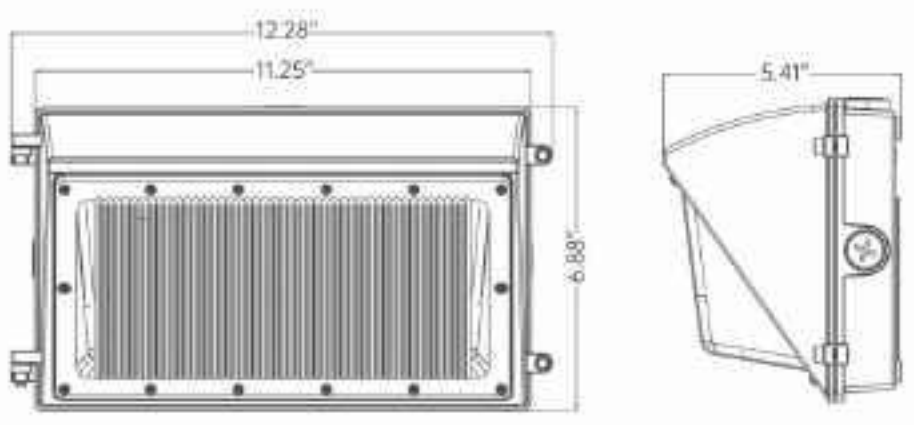

sales@edipai.com
+86 13923889456
www.edipai.com

EDI-WL-150W G4
EDI-WL-160W G4
EDI-WL-180W G4
EDI-WL-200W G4

14.4 x 7.0 x 7.3 Inch

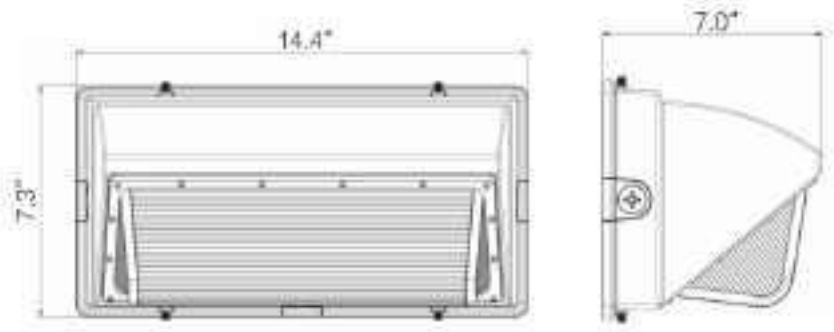

Packing / weight

Model	Outer Box (L x W x H)	Qty/Ctn (pcs)	G. W/Ctn (lbs)	Container 40HQ
EDI-WL-32W G4 EDI-WL-65W G4	325 x 215 x180 mm 12.8 x 8.5 x 7.1 inch	1	2KG 4.4 LBS	5200 pcs
EDI-WL-80W G4 EDI-WL-90W G4 EDI-WL-100W G4			3.0KG 6.6 LBS	
EDI-WL-120W G4 EDI-WL-130W G4			3.6KG 8 LBS	
EDI-WL-150W G4 EDI-WL-170W G4 EDI-WL-180W G4 EDI-WL-200W G4	400 x 220 x 210 mm 15.7 x 8.7 x 8.3 inch	1	4.0 KG 8.8 LBS	3500 pcs

Warranty

This product has a warranty of period of 5 years from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering or removal of the Q.C. and/or date label, usage in improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit. Manufacturer does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Manufacturer reserves the right to alter specifications without prior notice.

Note

1. The installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The thermally insulating material is not allowed to cover the fixture.
4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
5. Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.

sales@edipai.com +86 13923889456 www.edipai.com