


Power Tunable
UFO High Bay Light

Product Appearance



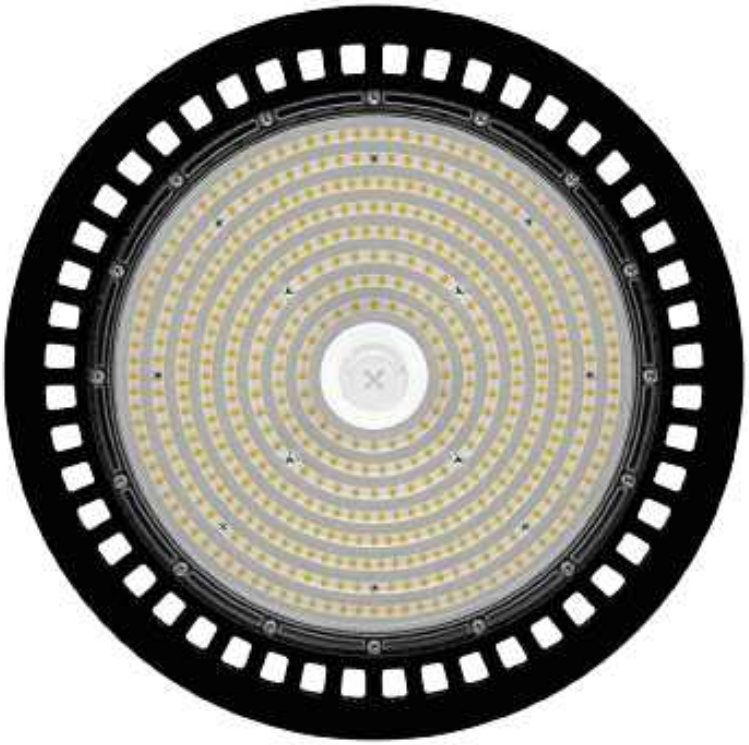

60° / 90° / 120°

5 Years warranty

0-10V DIMMERS


WATT TUNABLE

Sensing

Product Features

- DIP Switch: 3 different power;
- Innovative & unique structure and design;
- Die-casting radiator with excellent heat dissipation, overall power-coated and through 2000hrs' salt spray testing;
- With high transmittance of PC lens;
- Using the appropriative water-proof connector and silicone ring to seal, protecting level reaching IP65, suitable for different kinds of outdoor harsh working environment.


Product Dimension

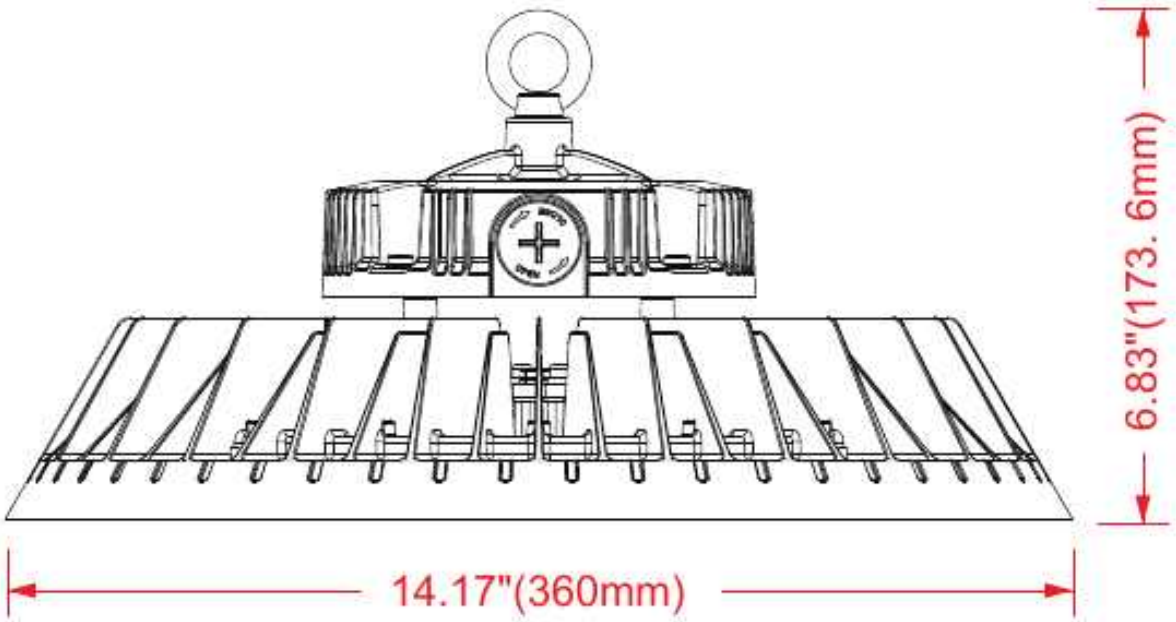


Specification


MODEL	UFO-300W-L-H	UFO-300W-H-H
INPUT VOLTAGE	120-277VAC 50/60Hz	277-480VAC 50/60Hz
RATED POWER	Watt tunable: 200W/240W/300W	Watt tunable: 200W/240W/300W
CCT	4000K-6500K	
CRI	Ra>70	
LIGHT EFFICACY	150lm/W	
POWER FACTOR	>0.95 at full load	
SENSOR TYPE	Microwave sensing	
MICROWAVE FREQUENCY	5.8GHz ±75MHz	
STAND-BY POWER	<0.5W	
DETECTION AREA	25% / 50% / 75% / 100%	
HOLD TIME	5s / 30s / 1min / 3min / 5min / 10min / 20min / 30min	
DAYLIGHT THRESHOLD	2Lux / 10Lux / 30Lux / 50Lux / 80Lux / 120Lux / Disable	
STAND-BY PERIOD	0s / 10s / 30s / 1min / 5min / 10min / 30min / +∞	
STAND-BY DIMMING LEVEL	10% / 20% / 30% / 50%	
MOUNTING HEIGHT	Max.15m / 49.2ft	
DETECTION RANGE	Max.14m / 45.92ft	
OPERATING TEMPERATURE	-20°C~+40°C(-4°F~+104°F)	
IP RATING	IP65	

Photometry

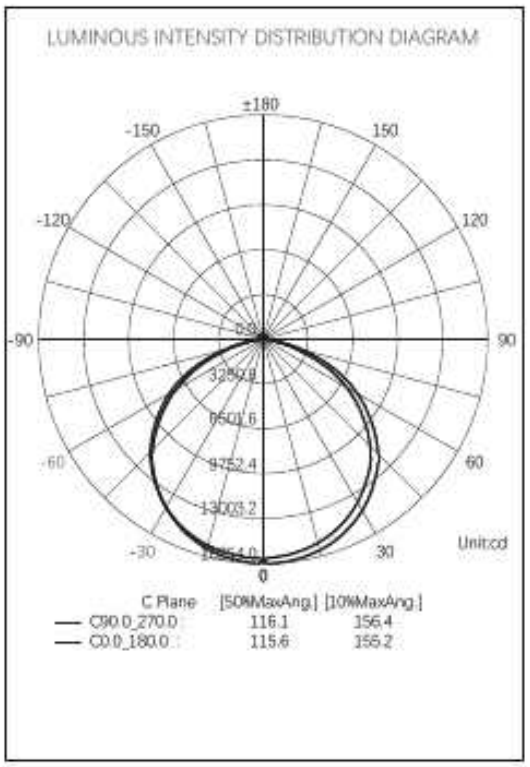

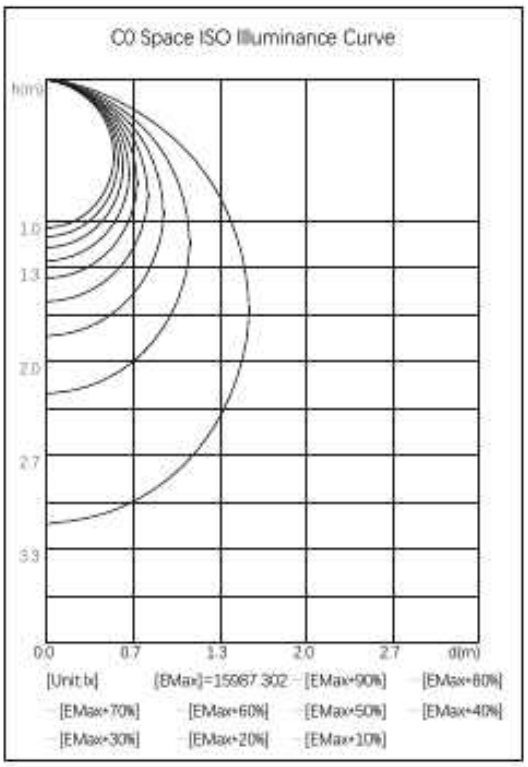

Average effective illumination

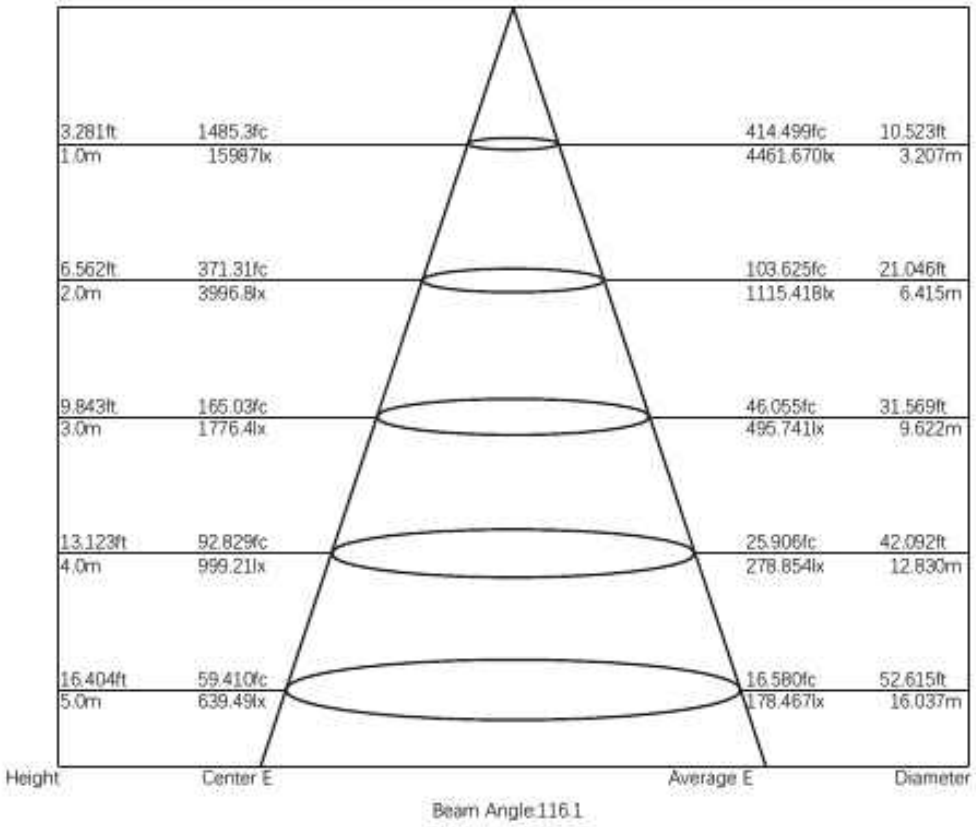

Introduction of Motion sensor and programmble function:



A: Normal waterproof cap



B: Infrared + Bluetooth sensor



C: Photocell sensor+
Microwave sensor cap




Easy to install: unscrew the waterproof cover and install the sensor you need


Model Number	Sensor Type	Connector	Controller
EFS106-AUX	PIR	Audio Jack	Keilton APP
EFS07-AUX			SPEC-RM51
ANT-6-4T			RC-100
HD07VR-PH-1			HD06R
HD07VR-PHB-1			HAISEN BLUE APP
EFS06R-AUX.A4	Microwave		SPEC-RM51
ANT-5-4T			RC-100
HD07VR-MH-1			HD06R
HD07VR-MHB-1			HAISEN BLUE APP

Networked Lighting Controls: HAISEN BLUE / GEBC / Keilton


Installation

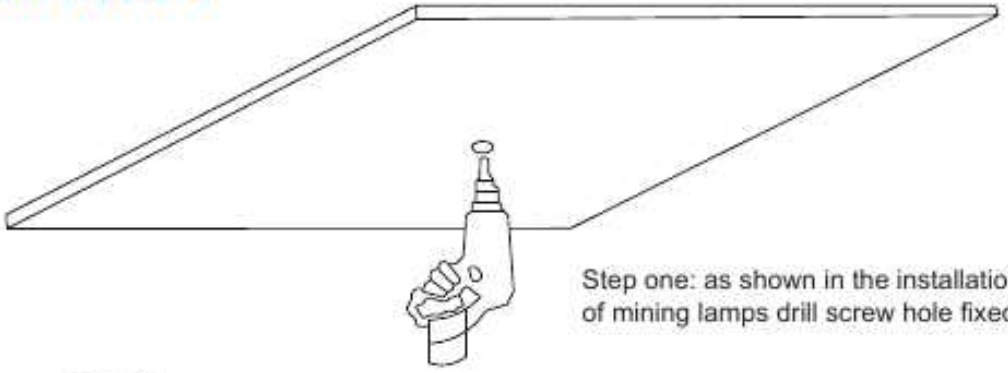

Step one: as shown in the installation position
of mining lamps drill screw hole fixed the chain a good.

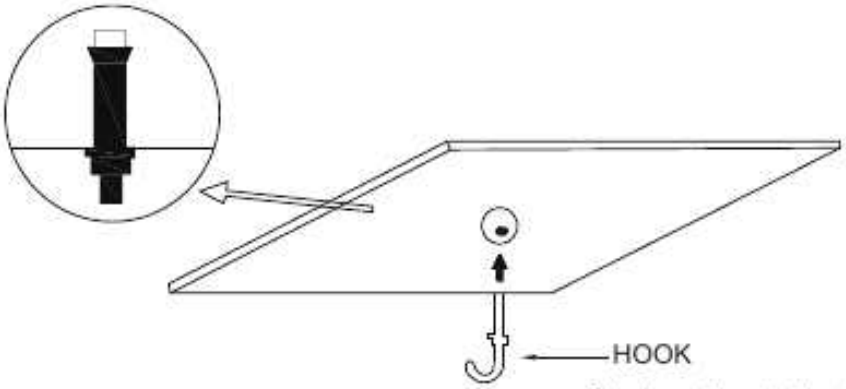

Step two: then in the drill hole position will hook
is fixed at the drill hole position. (pictured above)

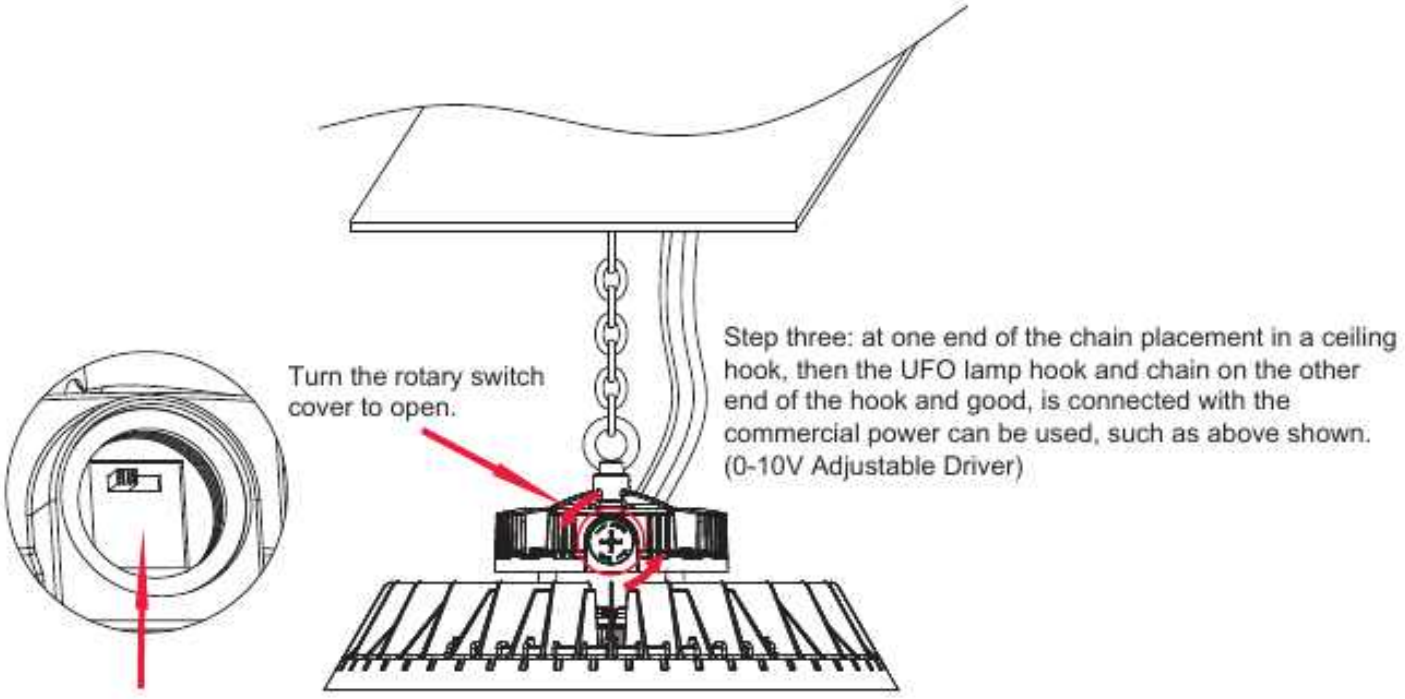


Step three: at one end of the chain placement in a ceiling hook, then the UFO lamp hook and chain on the other end of the hook and good, is connected with the commercial power can be used, such as above shown. (0-10V Adjustable Driver)

Turn the rotary switch
cover to open.

Watt Tunable : Switch 1
3 different power: 300W / 240W / 200W


Wiring instruction

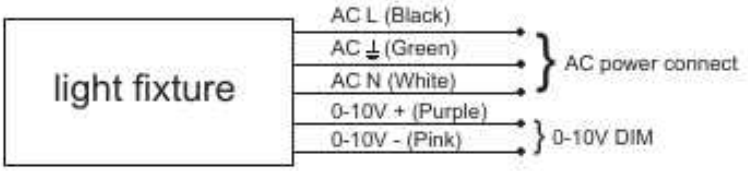

Packing / Weight

PART NO.	OUTER CARTON SIZE (L*W*H)	QTY / CARTON (PC)	NET WEIGHT (KG)(LBS)	GROSS WEIGHT (KG)(LBS)	20GP (PCS)	40HQ (PCS)
UFO-300W-L-H	41*41*16.5CM	1 PC	3.68 kg 8.12 lbs	4.5 kg 9.93 lbs	985	2326
UFO-300W-H-H	41*41*16.5CM	1 PC	3.68 kg 8.12 lbs	4.5 kg 9.93 lbs	985	2326

Packing

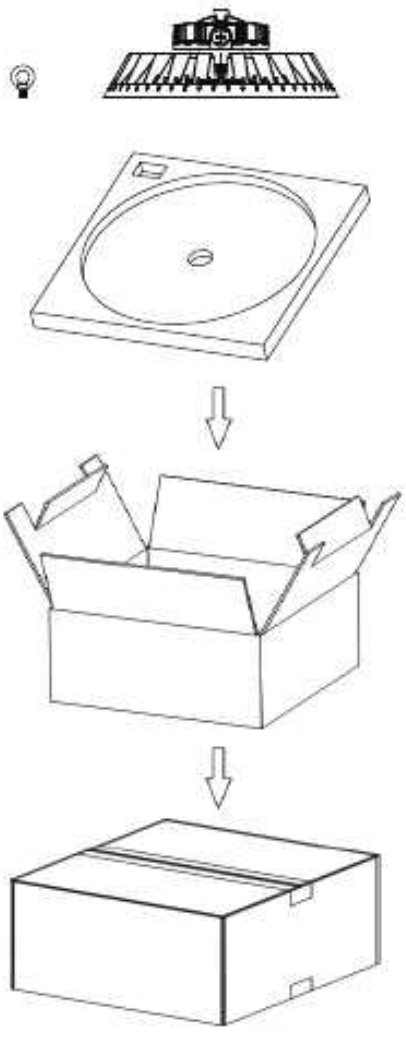

Power Tunable
UFO High Bay Light






Note

1. The installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The fixture is not allowed to be covered by thermally insulating material.
4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
5. Working temperature: -4°F~104°F, Storage temperature: -22°F~140°F.