TUNABLE LED UFO High Bay(UFO12)

WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable



This high-performance UFO High Bay Light is ideal for new construction or replacement. Delivers top energy savings and maintenance free durability for a wide range of applications. Designed for quick and easy installation.

FEATURES:

- DLC 6.0 Premium with high luminous efficiency and low UGR.
- Simple and stylish appearance.
- Excellent heating dissipation.
- Branded driver and LED's.
- Microwave Sensor, PIR Sensor, PIR Sensor with Bluetooth, Motion Sensor with Bluetooth.
- Very complete accessories for option.
- 0-10V dimming.

PRODUCT PARAMETERS:

SPECIFICATION					
MODEL	SS-UFO12-150W	SS-UFO12-240W	SS-UFO12-255W	SS-UFO12-300W	SS-UFO12-500W
WATTAGE	150/120/100W	240/200/150W	255/200/150W	300/240/200W	500/400/300W
LUMENS	22078LM(Max)	35575LM(Max)	40326LM(Max)	48390LM(Max)	80300LM(Max)
CCT	3500K/4000K/5000K Tunable				
CRI	70/80				
INPUT VOLTAGE	AC120-277V/AC120-347V/AC 277-480V				
LIGHTING ANGLE	90°				
OPERATING TEMPERATURE	-40℉~113℉				
STORAGE TEMPERATURE	-40℉~158℉				
PF	＞0.9				
DRIVER EFFICIENCY	＞90%				
PROTECTION LEVEL	WET				
LIFE TIME	＞50000 hours				
WARRANTY	5 years limited				

Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-0755-21008727 | Fax: +86-0755-21008727 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com


TUNABLE LED UFO High Bay(UFO12)

WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable


PRODUCT DIMENSION

- **Hook type(Standard):**


150/120/100W

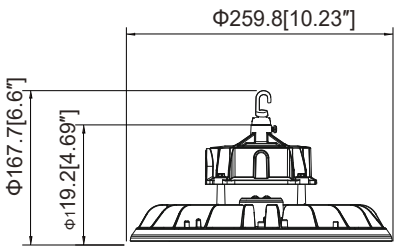


240/200/150W

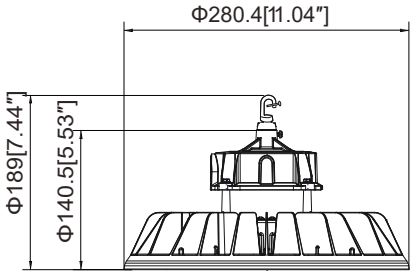

300/240/200W

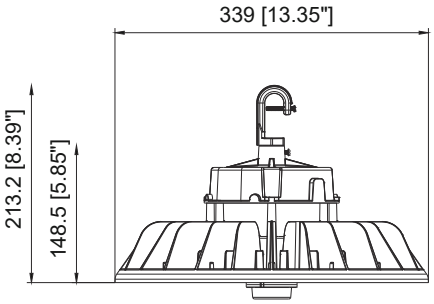

500/400/300W

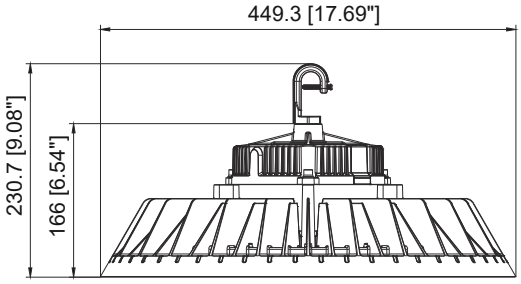

	Packing	Size	Net Weight	Gross Weight	pcs/ctn
150/120/100W	Outer Packing Size	L10.59xW10.59xH5.63 inch L269xW269xH143 mm	3.46Lbs(1.57Kg)	4.41Lbs(2Kg)	1pcs/ctn
240/200/150W	Outer Packing Size	L11.38xW11.38xH6.38 inch L289xW289xH162 mm	4.78Lbs(2.17Kg)	5.89Lbs(2.67Kg)	1pcs/ctn
300/240/200W	Outer Packing Size	L15.16xW15.16xH7.48 inch L385xW385xH190 mm	6.97Lbs(3.16Kg)	8.83Lbs(4.01Kg)	1pcs/ctn
500/400/300W	Outer Packing Size	L20.28xW20.28xH8.66 inch L515xW515xH220 mm	13.85Lbs(6.28Kg)	16.76Lbs(4.5Kg)	1pcs/ctn

Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-0755-21008727 | Fax: +86-0755-21008727 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com

TUNABLE LED UFO High Bay(UFO12)

WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable



Easy, screw-in sensors for all your needs.





MOUNTING BRACKETS:



HOOK (STANDARD)




RING (SOLD SEPARATELY)



YOKE (SOLD SEPARATELY)

ACCESSORIES (SOLD SEPARATELY):



Wire Guard



90° Aluminum Reflector



90° PC Reflector



bottom cover for PC reflector



Emergency Driver



Safety Rope



Hanging Chains



Remote Controller



Microwave sensor



PIR Sensor

TUNABLE LED UFO High Bay(UFO12)

WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable

ORDERING GUIDE:

EXAMPLE:


SS-UFO12-150W-H-xx-TCP-Y

SS	UFO12	150W	H	xx	TCP	Y
COMPANY	PRODUCT	POWER	HIGH LUMENS	INPUT VOLTAGE	CCT	CONTROL
Starlake	UFO Highbay	150W=150/120/100W 240W=240/200/150W 255W=255/200/150W 300W=300/240/200W 500W=500/400/300W		Blank=120-277Vac HV=277-480Vac MV=120-347Vac	TCP = adjust color temperature and wattage.	A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) C: BRT sensor (occupancy+bluetooth) D: PHB sensor (Infrared bluetooth) Balnk: no provide sensor


DISTRIBUTION

For complete IES files, please visit our website.


SS-UFO12-150W-H-TCP-[A,B,C,D,blank](150W-5000K)

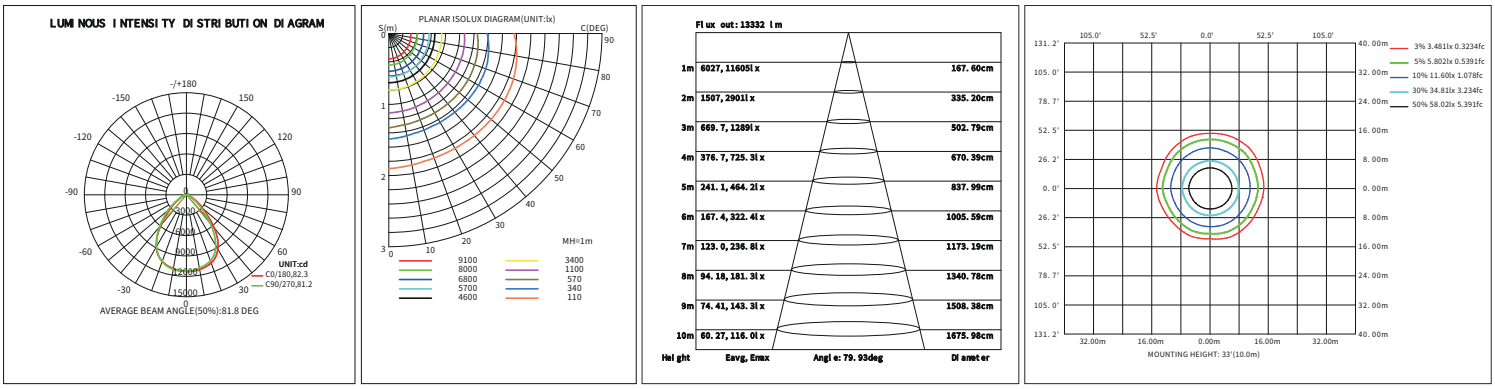

SS-UFO12-200W-H-TCP-[A,B,C,D,blank](200W-5000K)

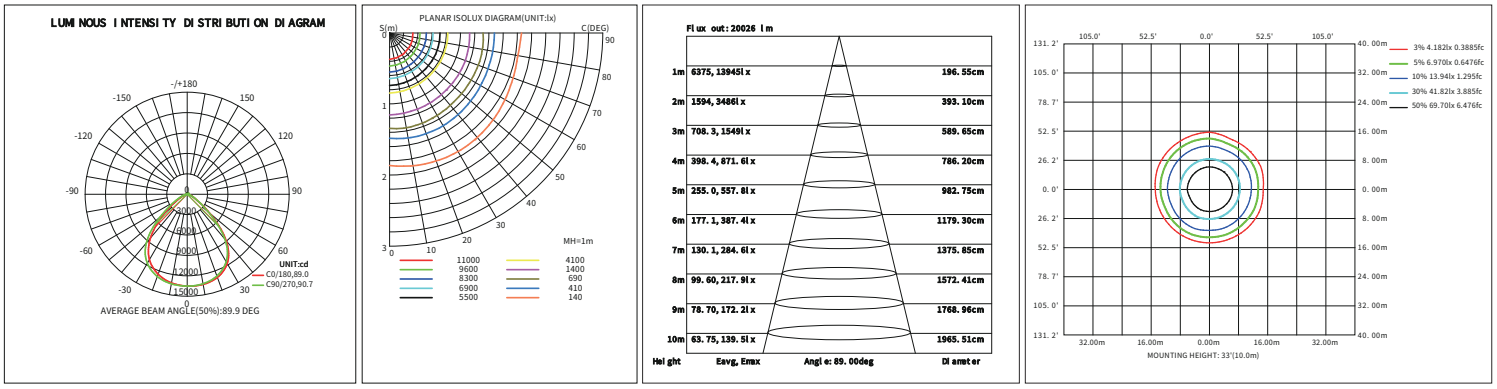

SS-UFO12-240W-H-TCP-[A,B,C,D,blank](240W-5000K)

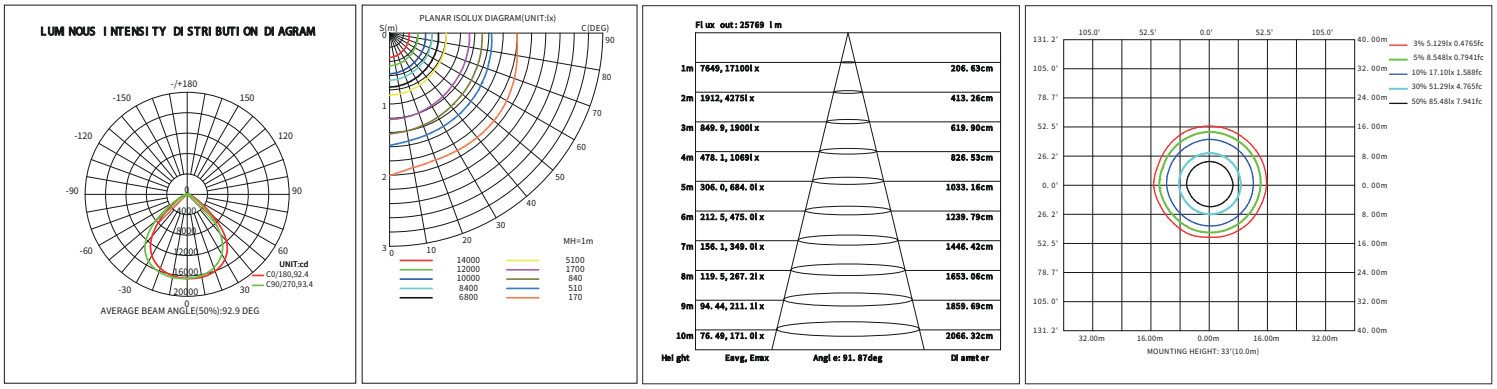


Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-0755-21008727 | Fax: +86-0755-21008727 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com


TUNABLE LED UFO High Bay(UFO12)

WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable

SS-UFO12-300W-H-TCP-[A,B,C,D,blank](300W-5000K)




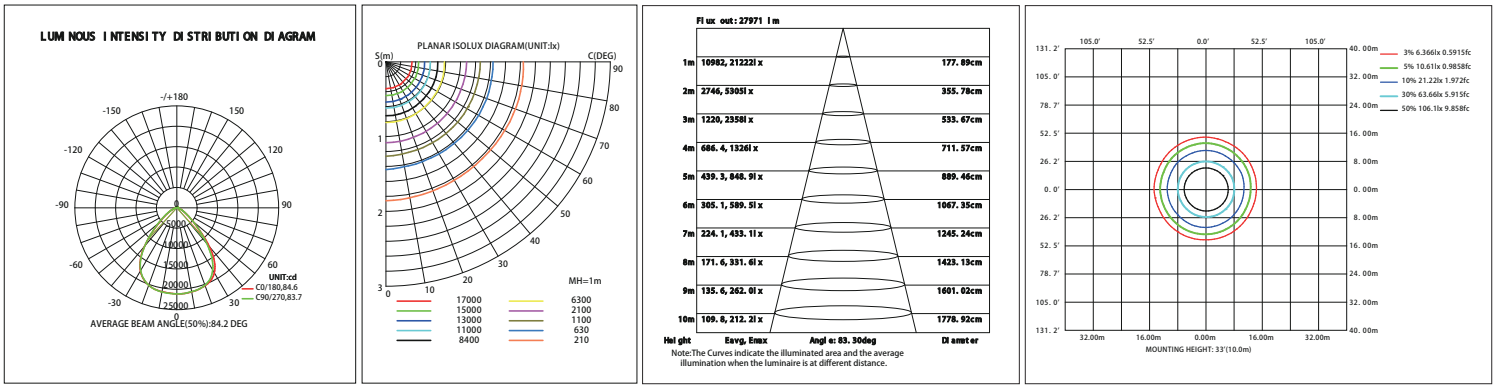


SS-UFO12-500W-H-TCP-[A,B,C,D,blank](500W-5000K)



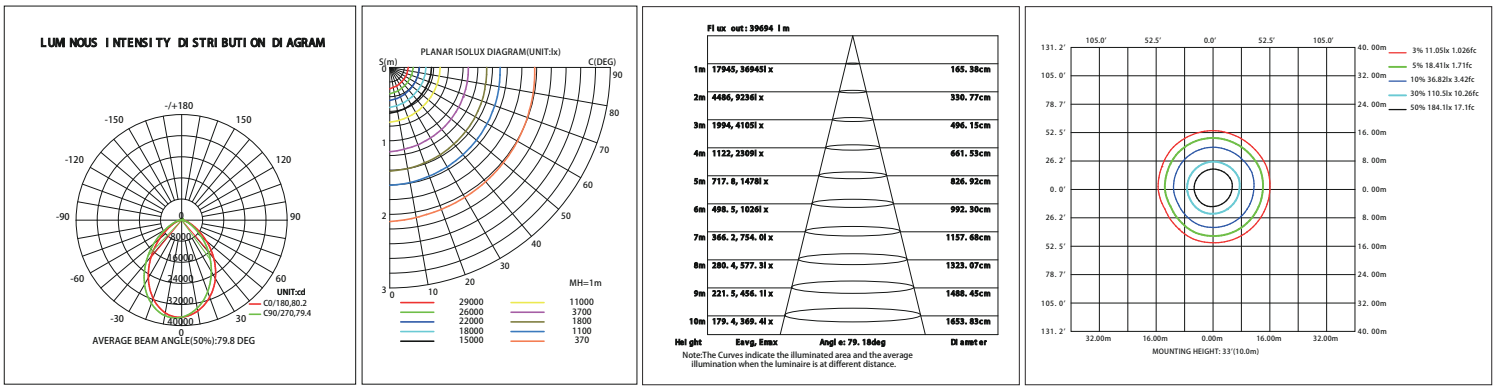


INSTALLTION INSTRUCTION:

1.Hook type:


1.Lock the hook.	2.Tighten the screw. (This step can be omitted if there is no screw hole.)	3.Hang up the light.	4.Lock the screw.
			

2.Yoke type:

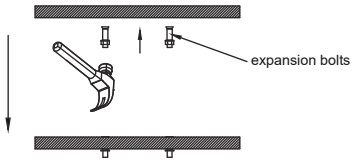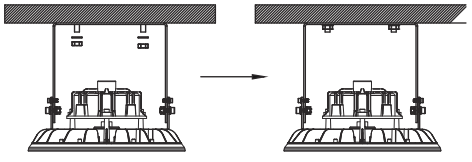
1.Bracket fixing holes are marked on the wall, then drilling two holes on the wall by power drill, as shown in Figure1.	2.Tap two expansion bolts into the holes, as shown in Figure2.	3.Put the fixture on the expansion bolt, then use a wrench to tighten the screw. as shown in Figure3.
		

3.Sensor installation:


1.Unscrew the plug screws using screws, as shown in Figure 1.




2.Remove the plug screw, as shown in Figure 2.



3.Screw the sensor into the base, as shown in Figure 3.



4.Sensor installation, as shown in Figure 4.



APPLICATIONS:



