

Post Top Light


Product Appearance



Product Features


- 1. UL , FCC , DLC listed.
- 2. Power optional: 50W-80W-100W-120W-150W
- 3. Lumen efficiency: 150 lm/w.
- 4. Input voltage: 120-277VAC .
- 5. Five years'warranty.
- 6. Product Rating : IP65 Rated,Wet Rated.
- 7. Perfect for installing on 3-6m poles along both wide and narrow bicycle paths, parking lots, parks, yards, etc.

Product Dimension

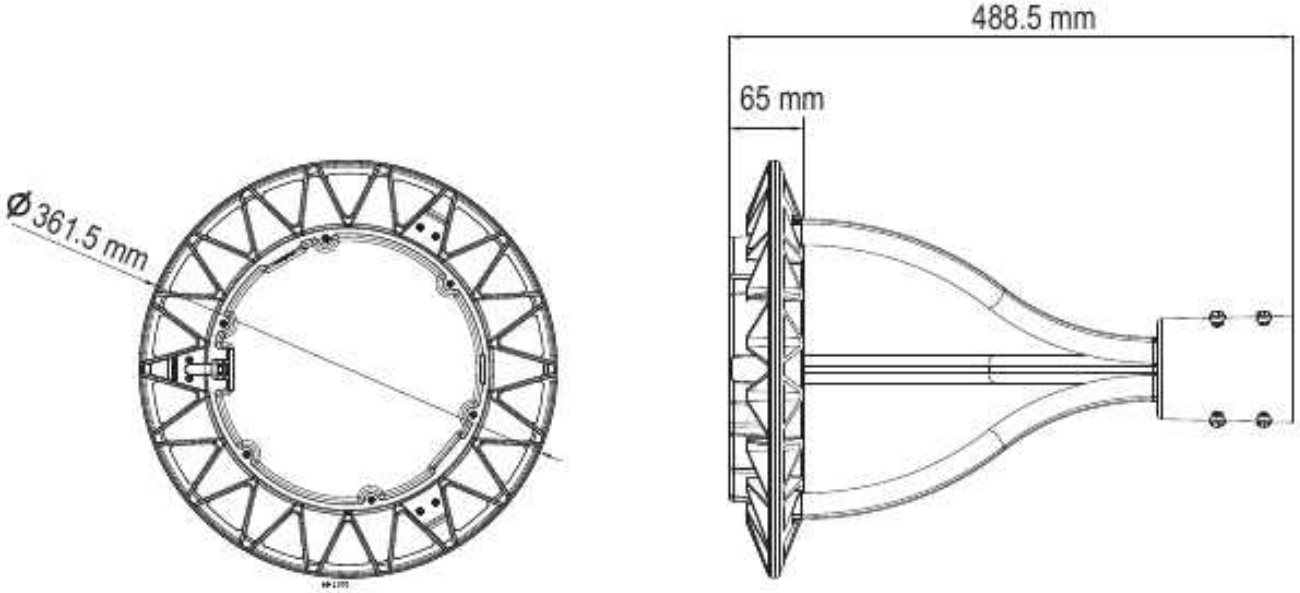


Specification


Mode	Power	Working Current	Input Voltage	CCT	THD	Ra	PF	Warranty
GL-SX4-150W-H-XXXXK	50W-80W-100W-120W-150W	1.25A	AC120-277V	3000K 4000K 5000K	<20%	>70	>0.9	5 years

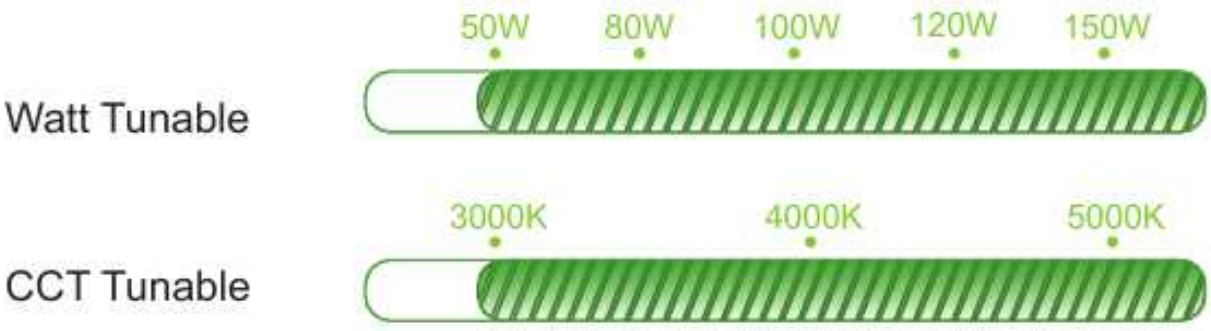

Product Features

Adjusting Color Temperature & Power:

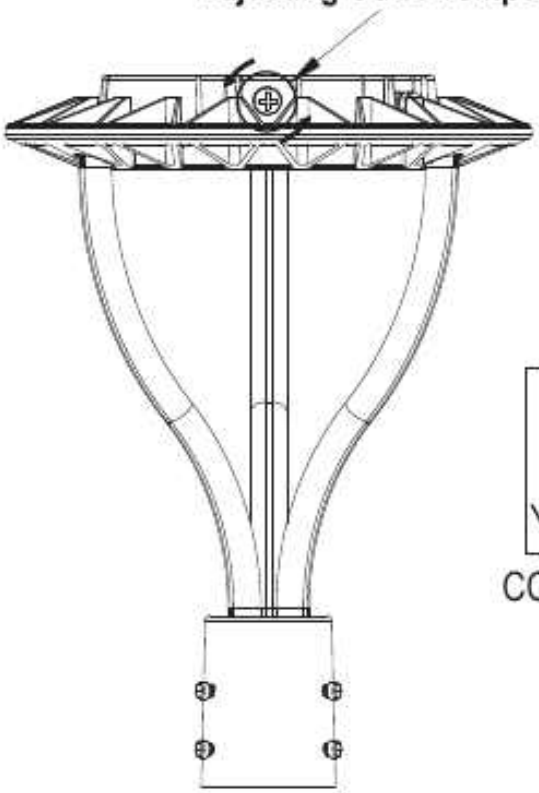

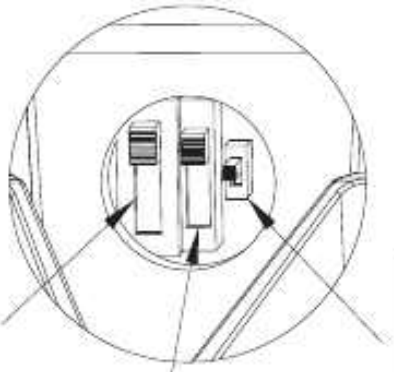

3000K
4000K
5000K

CCT Tunable

OFF
ON

Light sensor switch

50W
80W
100W
120W
150W

Power Tunable

Installation

Please cut off the power before installation

Parts List



Luminaire x 1 PCS



M4 x 8 Support Rod Fixing Screw
x 12 PCS



M8 x 25 Bracket Fixing Screw
x 6 PCS




S-Type Main Support Rod
x 3 PCS



Round Rod Bracket
x 1 PCS


1. Thread the luminaire's AC cable through the center hole of the S-Type Main Support Rod.

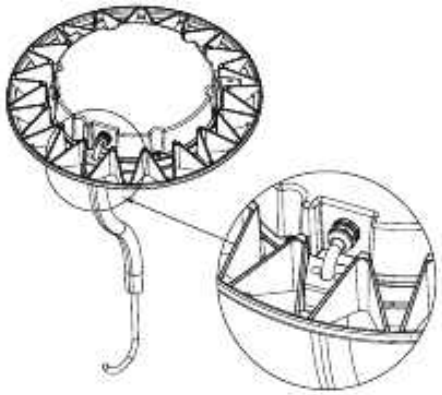


2. Align the three S-Type Main Support Rods to the base of the luminaire. Insert the six M4 x 8 screws into the six screw holes on the luminaire's base plate and tighten them into the threaded holes of the support rods.




3. Align the three S-Type Main Support Rods with the three slot holes on the Round Rod Bracket.
Note: Ensure the support rod with the AC cable is aligned with the set of three round holes inside the bracket's slot. Pass the AC cable through these holes.

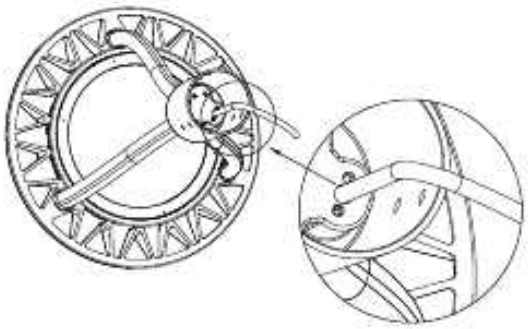


4. Align the six M4 x 8 screws with the six holes on the bottom of the Round Rod Bracket and tighten.

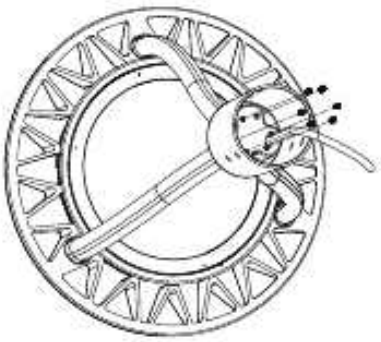

5. Connect the luminaire's AC cable to the mains power supply, following the wiring diagram.

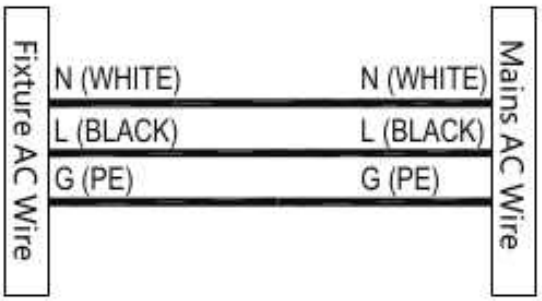


6. Insert the assembled luminaire into the lamp pole. Align the six M8 x 25 screws with the six threaded holes on the outer surface of the Round Rod Bracket and tighten them securely.

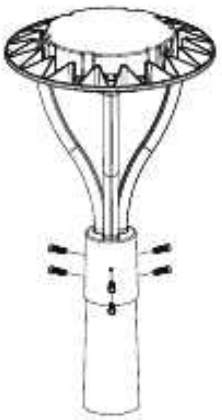

Packing/weight

Part No.	Outer Carton Size (LxWxH)	Qty/Carton (pes)	Net weight (kg)(lbs)	Gross weight (kg)(lbs)	20GP (PCS)	40HQ (PCS)
GL-SX4-150W-H-XXXXK	415*415*235mm 16.34"x16.34"x9.25"	2 PCS	4.26 kg 9.39 lbs	4.8 kg 10.58 lbs	1400	3248

Packing

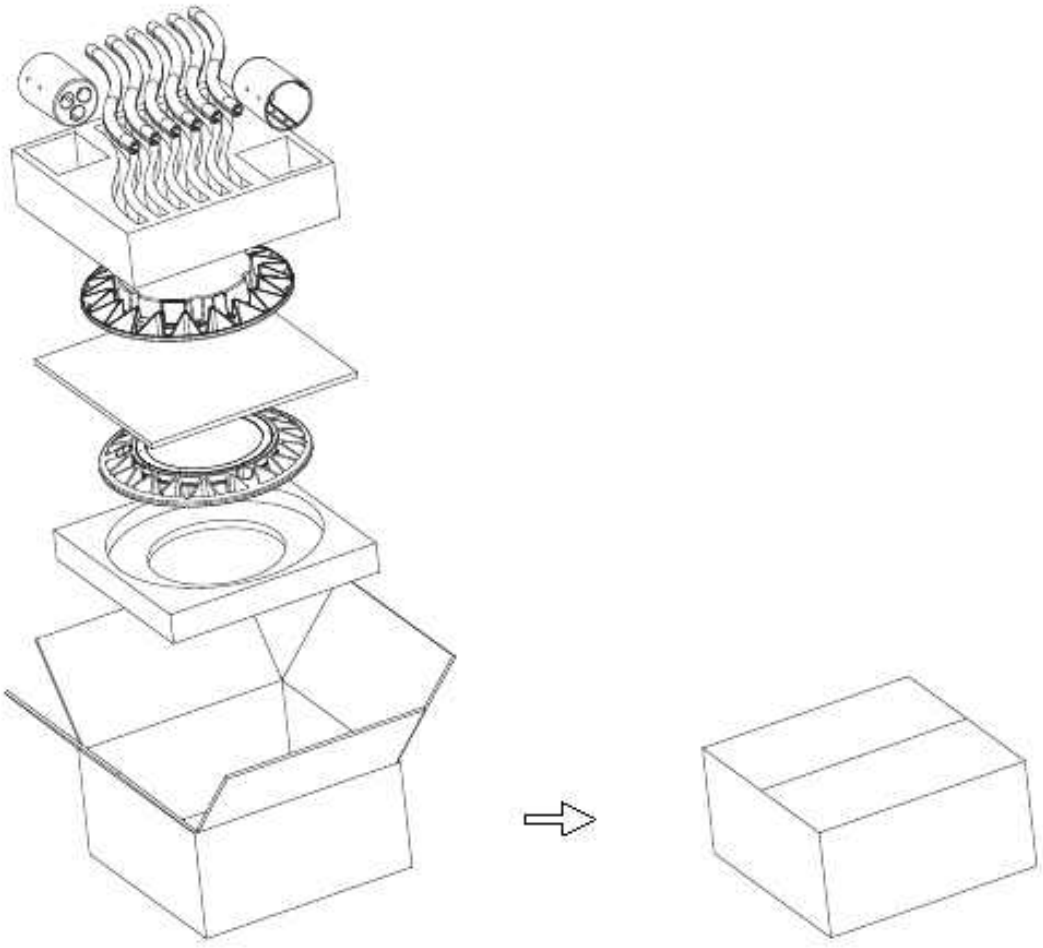



Note

1.The installation and maintenance must be completed by electricians or professionals.

2.Please cut off the power before installation and maintenance.

3.The fixture is not allowed to be covered by thermally insulating material.

4. Working temperature:-4°F~104°F, storage temperature:-22°F~140°F.