FA8 - 8FT - LED Tube

JEELIGHTING

JEE-T8®



FEATURES AND SPECIFICATIONS

Construction

- 8FT T8 LED Lamp | 40W | 5000K
- CRI > 80
- High-Efficiency | Double-ended wired into AC line voltage
- Housing: Aluminum+PC

Electrical

- Input Voltage: 100-277Vac 50/60Hz
- CCT: 5000K or 4000K
- Frosted PC lens eliminates pixelation or Clear Lens
- Approximately 60% more energy-efficient than standard F32 T8 lamps
- 130+ Lumens per Watt

Applications

- Offices, retail, schools, restaurants, healthcare, residential, and hospitality applications.

Installation

- Replacement for conventional fluorescent lamp
- Double-ended line voltage wiring
- Operating temperature: -20°C/-4°F to 45°C/113°F
- **Storage temperature: -30°C/-22°F to 60°C/140°F**

Listing

- ETL Listed
- DesignLights Consortium®(DLC) Standard.

Warranty

- 5 years warranty

Specs at a Glance	* Nominal Wattage (Switchable)
Configuration	T8R-2400-40W-35-C-A 5000K
CCT (K)	40000K or 5000K Single CCT
Wattage (W)	40W
Lumens (lm)	5,000lm
Efficacy (LPW)	Up to 130
Size	4FT
CRI	>80
Input Voltage	100-277VAC, 50/60Hz
Operating Temp	-20°C/-4°F to 45°C/113°F
Certifications	ETL DLC 5.1 Standard
Warranty	5-year limited warranty

FA8 - 8FT - LED Tube

JEELIGHTING


Ordering information

Model	Description
T8R-2400-40W-35-C-A 5000K	8FT led tube,40W, 5000K or 4000K,120-277VAC,double-ended line voltage wiring

Detail



Dimensions

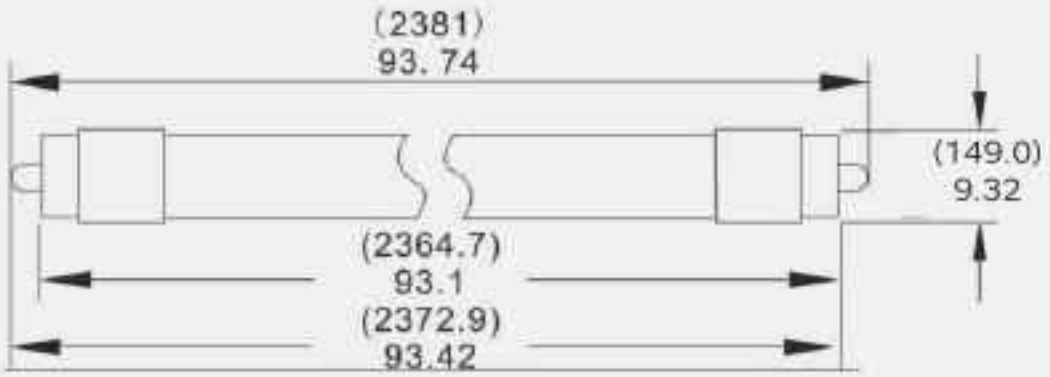

FA8 - 8FT - LED Tube


JEELIGHTING

Installation Instruction

Lamp installation in the following conditions and applications voids the product warranty:
- Line voltage above 277VAC
- LED drivers with a ballast
- Gasketed, fully enclosed fixtures
- Installation in wet environments
- Installation in broken, cracked, dirty or rusted tombstones
- Improper wiring to the tombstones/lamp

CAUTION:
Turn power off when installing the lamp.
CAUTION - IF THE LAMP OR LUMINAIRE EXHIBITS UNDESIRABLE OPERATION (BUZZING, FLICKERING, ETC.), IMMEDIATELY TURN OFF POWER, REMOVE LAMP FROM LUMINAIRE AND CONTACT MANUFACTURER.

Double-Ended Electrical Connection
Double-Ended Wiring:

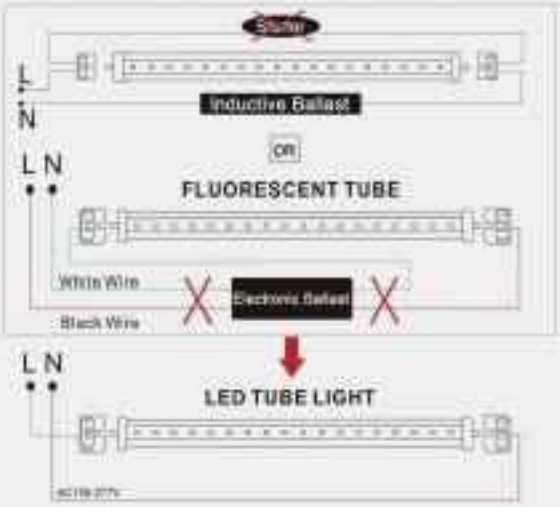

Packing Information

Model number	L /inch	W /inch	H /inch	QTY/ctn	G.W./lbs	CTN QTY/pallet
T8R-2400-40W -35-C-A 5000K	93	7.9	7.9	25	26.5	---