
LED FRAME LIGHT

JEELIGHTING

J-F2F4®

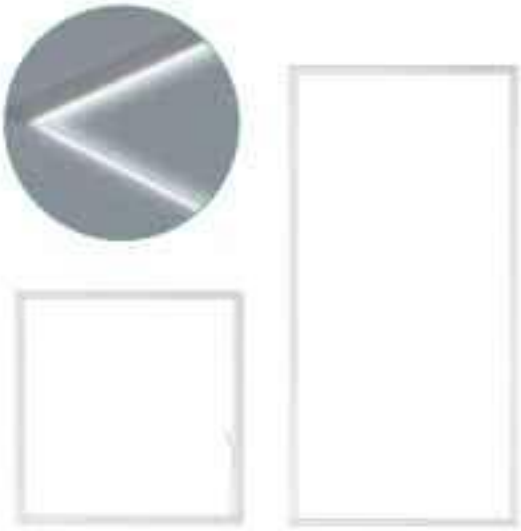

FEATURES AND SPECIFICATIONS

Construction

- **Frame comes in 2x2 and 2x4 options, offering a sleek,modern look with** top-notch functionality
- Wattage and CCT selectable reduce your stock SKU
- Cutting-edge optical tech, it matches the lighting specs of traditional LED panels

Electrical

- Input voltage:120-277V
- Operating frequency: 50/60Hz
- Power factor:>0.95
- Ambient temperature range: -20°C ~+45°C
- Color Temp:3000/3500/4000/5000/6500K
- Dimmable:0-10V dimming
- THD:<10%
- IP Rating:IP40
- CRI: >80
- Beam angle:120°

Applications

- **Offices , retail ,schools, restaurants, residential**

Installation

- Fixture is suitable for recessed mounting with T-bar
- Suspended installation

Listing

- ETL listed, suitable for damp location.
- DesignLights Consortium ®(DLC)Premium

Warranty

- 5-year limited warranty

Specs at a Glance	* Nominal Wattage (Switchable)	
Configuration	JEN-F2-K40-3065	JEN-F4-K60-3065
CCT (K)	3000K-3500K-4000K-5000K-6500K(Switchable)	
Wattage (W)*	20/30/40W wattage adjustable	40/50/60W wattage adjustable
Lumens (lm)	20W=2500lumens 30W=3750lumens 40W=5000lumens	40W=5000lumens 50W=6250lumens 60W=7500lumens
Efficacy (LPW)	Up to 125lm/w	
CRI	>80	
Input Voltage	120-277V	
Operating Temp	-20°C ~45°C	
Certifications	ETL&DLC Premium	
Warranty	5-year limited warranty	


LED FRAME LIGHT

JEELIGHTING


Ordering Information

Model	Description
JEN-F2-K40-3065	2' x 2' LED frame Light, Power Switchable 20W/30W/40W, Color Switchable 3000K/3500K/4000K/5000K/6500K, 120-277VAC
JEN-F4-K60-3065	2' x 4' LED frame Light, Power Switchable 40W/50W/60W, Color Switchable 3000K/3500K/4000K/5000K/6500K, 120-277VAC

Detail

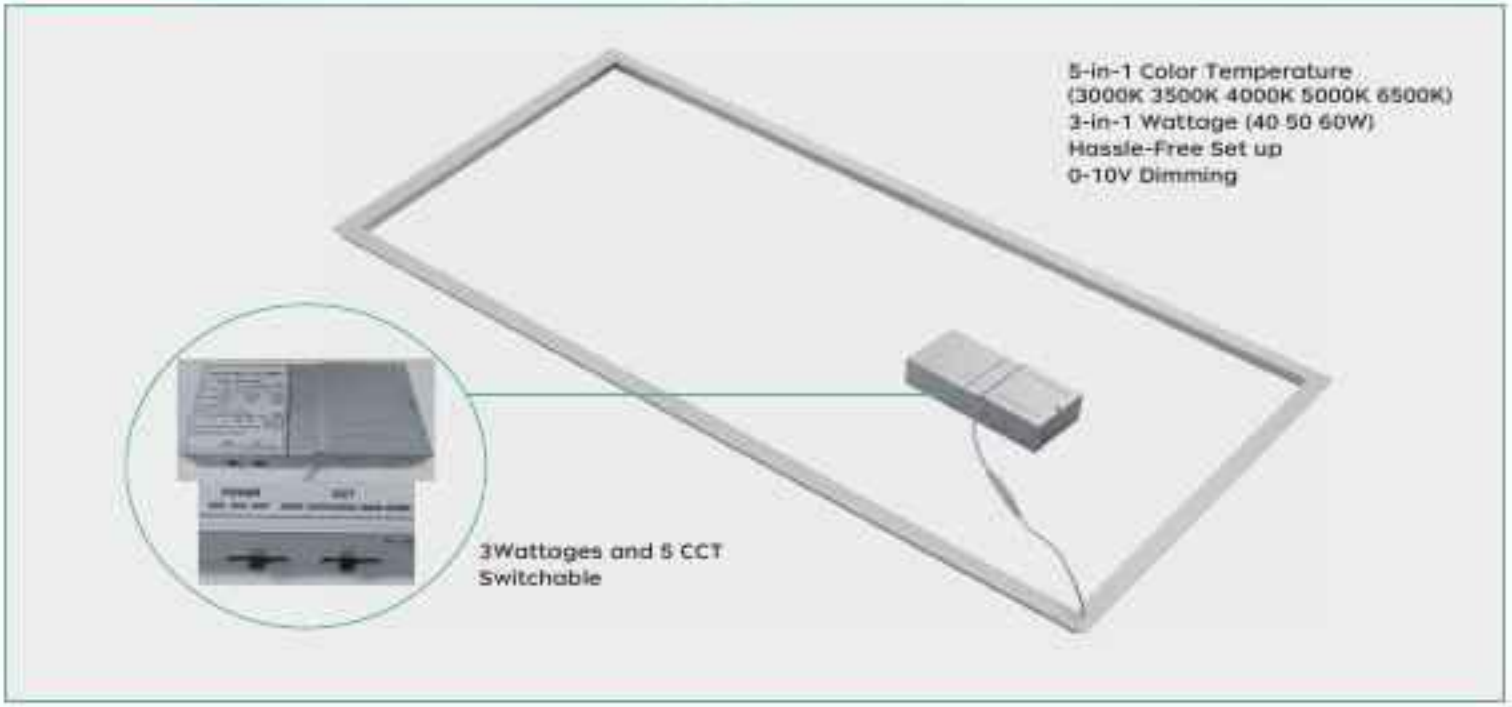

Dimensions

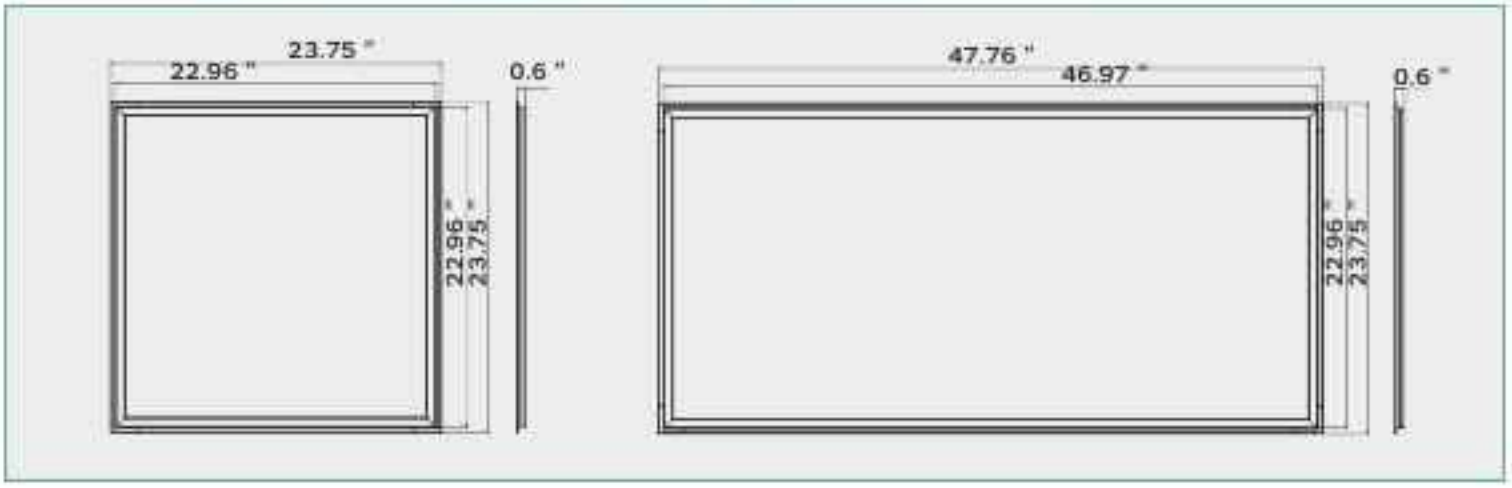



LED FRAME LIGHT

JEELIGHTING


Installation Instruction


Recessed Mounting

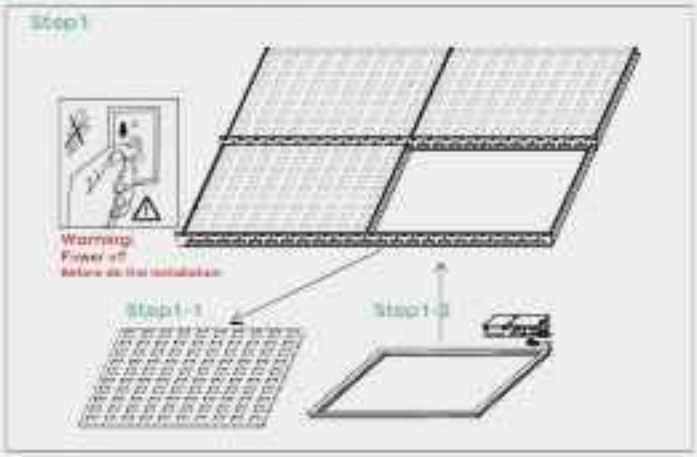


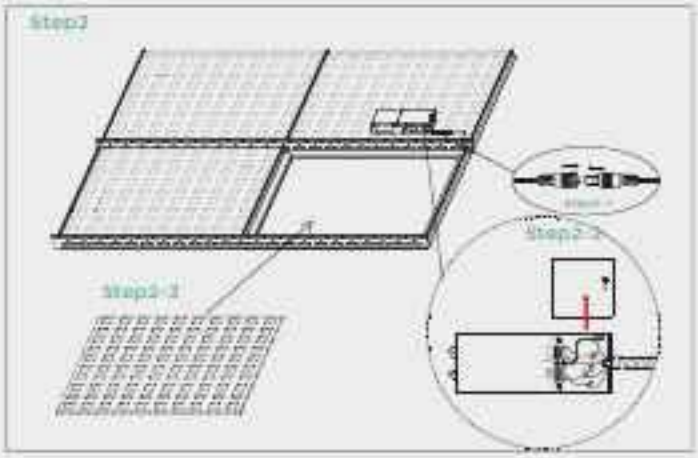

Suspended mounting

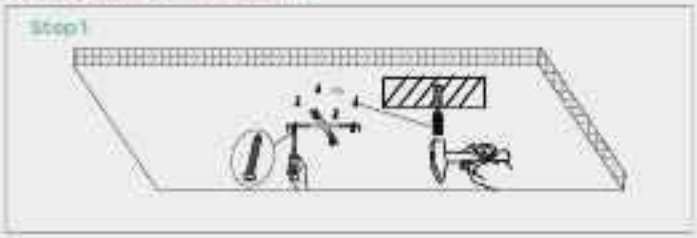

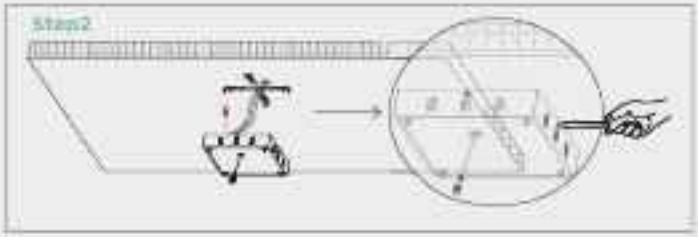

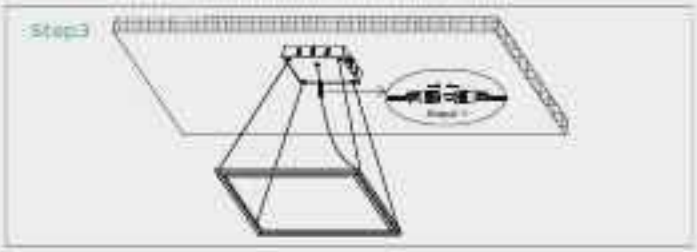

Step 1: Fix the bracket of the canopy to the ceiling;

Step 2: Put the driver into the canopy and connect the AC input wire, then dimming wire; align the canopy horizontally upwards with the 4 holes of the bracket and screw tightly.

Step 3: Fasten the 4 lifting ropes to the 4 holes at the light fixture and then to the 4 holes at the canopy,latch on;then plug in the male-female connector of the driver and light fixture, installation complete!

Warning:

Make sure all the power is off before installation. All the installations are required to be done by professionals.

LED FRAME LIGHT

JEELIGHTING

Wiring Diagram



Packing Information

Size/ft	L /inch	W /inch	H /inch	QTY/ctn	G.W./lbs
2x2'	27.9	25.5	9	6	15.8
2x4'	51	25.5	9	6	21