JEELIGHTING

# J-WP11F

## FEATURES AND SPECIFICATIONS



### Construction

- Housing: Die-cast Aluminum
- Lens: Polycarbonate
- Easy to install and operate

### Electrical

- High efficacy up to 160lm/W
- AC120-277V, 0-10V dimming
- Surge Protection: 6KV
- CCT & Wattage Selectable
- Light Distribution: Type III
- Waterproof: IP65 rated

### Applications

- Factory, Warehouse, Walkways, Hallways, Outdoor Commercial, Outdoor Residential

### Installation

- Microwave motion sensor and emergency driver available
- Automated Dusk to Dawn photocell functionality
- Wall Mount
- Five 1/2" knockouts: one on each side for convenient installation

### Warranty

- 5 years warranty

| Specs at a Glance | * Nominal Wattage (Switchable) |
|---|---|
| Configuration | J-WP11F-120W-54W3C |
| Input Voltage | 120-277V |
| Wattage (W)* | 60W/90W/100W/120W Wattage Selectable |
| Lumens (lm) | max. 19200lm |
| Ecacy (LPW) | Up to 160lm/w |
| CCT (K) | 3000K/4000K/5000K Tunable |
| CRI | >80 |
| Operating Temp | -40°C to +50°C |
| Certification | UL DLC Premium |
| Warranty | 5 year limited warranty |

# LED Full-Cutoff Wall Pack

JEELIGHTING

## Ordering information

Example: J-WP11F-120W-54W3C

| Brand | Wattage xxxW | Input Voltage | Lighting Distribution | Controller |
|---|---|---|---|---|
| JEE Lighting WP11F Series | 60W<br>90W<br>100W<br>120W | L= AC120-277Vac<br>H= AC277-480Vac | T3=Type III | "f" can be any alphanumeric for CCT, 3000K/4000K/5000K<br>"g" can be "W" or blank for dimming module provided for not. |


## Detail




# LED Full-Cutoff Wall Pack

JEELIGHTING

## Dimensions

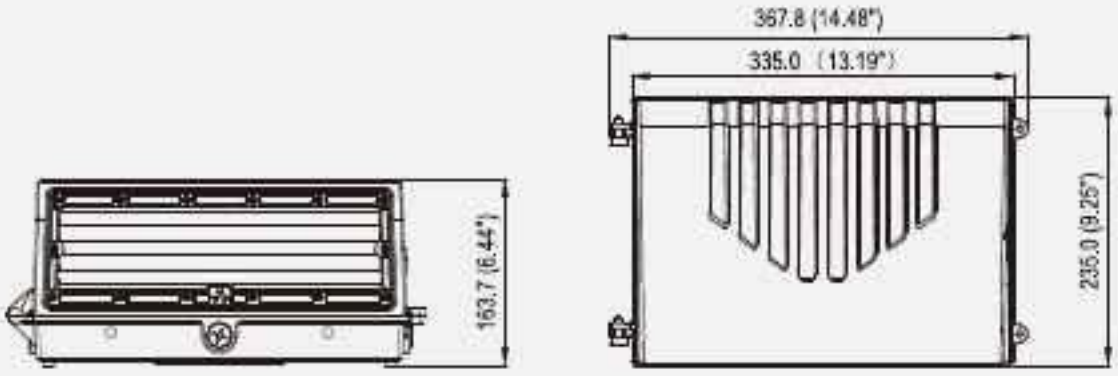


## PHOTOMETRICS

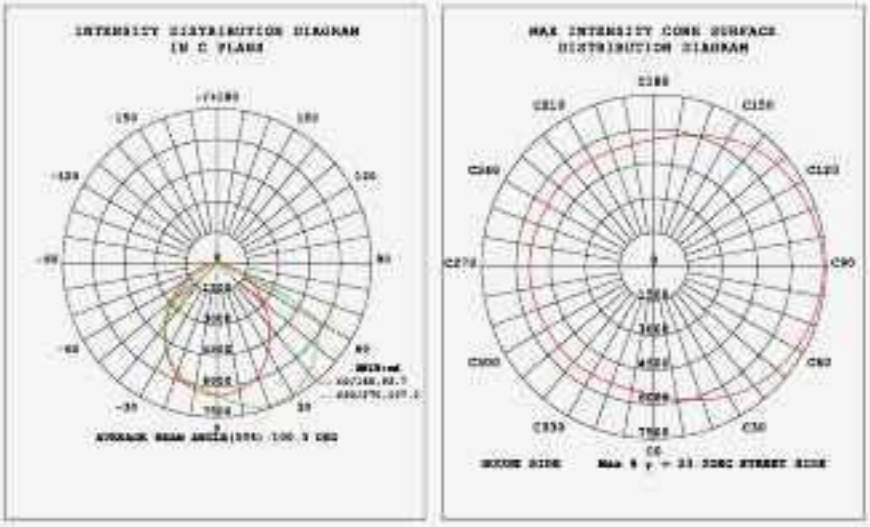


## Packing/Weight

| Part NO. | Outer Carton Size | Qty/Carton(pcs) | Net weight(lbs) | Gross weight(lbs) |
|---|---|---|---|---|
| J-WP11F-120W | 16.73*11.42*8.54 inches | 1 | 5.94 lbs | 7.7 lbs |