JENLIGHTING

JEN-CP02

LED GARAGE CANOPY LIGHT



FEATURES AND SPECIFICATIONS

Construction

- Lens Material: Polycarbonate
- Housing: Die-cast Aluminum
- Finish Colors: Black/ white/ brown

Electrical

- Working voltage 120-277V 50/60Hz
- Operating Temperature Range: -30°C to +50°C
  Note: Operating with emergency battery temperature range: 5°C to 45°C (+41°F - + 113°F).

Performance

- IP Rating: IP65
- Sensor: Microwave motion sensor/ PIR sensor photocell
- THD: <20%
- Power Factor: ≥0.95
- High efficacy up to 135LM/W
- Life Time >50,000Hrs
- Surge Protection: LN-PG :5KV, L-N:4KV

Applications

- Parking garages, Canopies, Storage areas, Outdoor aisles, Walkways, Entryways

Installation

- Pendant mounting, surface mounting

Listing

- UL listed
- DesignLights Consortium®(DLC)Premium

Warranty

- 5-year limited warranty

Specs at a Glance	* Nominal Wattage (Switchable)
Configuration	J-CP75W-CS-3CCT-A
CCT (K)	3000K 4000K 5000K Color Tunable
Wattage (W)*	75W/60W/40W wattage adjustable
Lumens (lm)	75W= 10125 lumens 60W= 8100 lumens 40W= 5400 lumens
Efficacy (LPW)	Up to 135lm/w
CRI	>80
Input Voltage	120-277V
Operating Temp	-30°C-50°C
Certification	UL&DLC 5.1 premium
Warranty	5 year limited warranty

JENLIGHTING


JEN-CP02

Ordering information

Model	Description
J-CP75W-CS-3CCT-A	Canopy , Power Switchable 75W/60W/40W, Color Switchable 3000K/4000K/5000K 120-277VAC



Dimensions

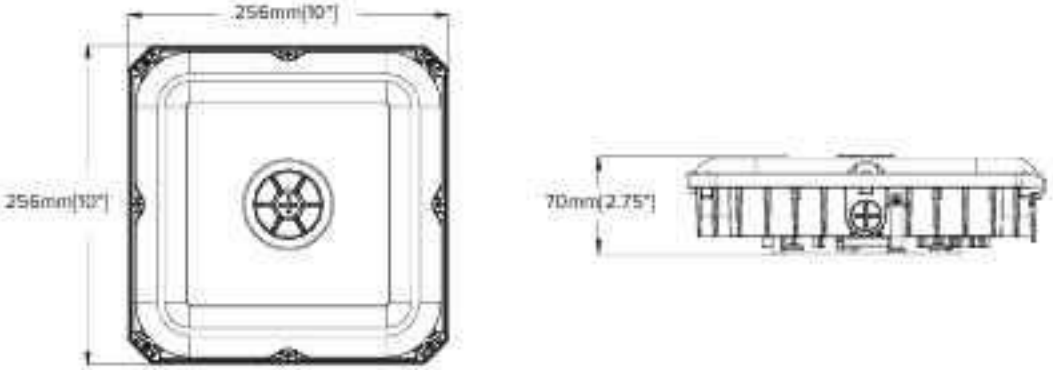

Accessories



Microwave motion sensor



Photocell

JENLIGHTING

JEN-CP02

Packing Information

Power	Inner Box Size (L*W*H)	Outer Carton Size (L*W*H)	QTY/ctn	G.W./pcs	G.W./ Carton	CTN QTY/ pallet
75W	11.5"X11.5"X3.95"	17.32"X12.01"X12.20"	4	5.78lbs	23.06lbs	192pcs

JEN Lighting Corp
www.jenlighting.com
3580 Oceanside Road, Oceanside, New York 11572