LED BACK-LIT PANEL LIGHT

WATTAGES: 40W, 50W, 72W Max Tunable



New Generation produce industry-leading performance with deep energy savings and continuous dimming. The compact, slick profile produces uniform and glare free lumen output.
Perfect application for retail stores, schools, offices, markets and restaurant.

Product Features:

- **CONSTRUCTION**

Durable solid frame, prefabricated paint with matte white finished. Slim profile design. Integrated T-Bar mounting clips built in onto the fixture. Easy installation.

- **ELECTRICAL**

Luminaire is built with the highest quality driver that is Universal Voltage(120V-277V & 120V-347V), uses long lasting, highly-efficient LED packages.

- **DRIVER**

Driver is fixed on the back of the panel or side to prevent mis-handling during shipment.

- **OPTICAL SYSTEM**

Back-lit optics produces uniform light output, diffuser lens reduces glare and improve overall energy efficiency.

- **ENERGY SAVINGS**

Over 50% energy savings than traditionally fluorescent fixtures, low heat productions requires less maintenance and operation cost.

- **LISTING**

ETL & UL Listed, FCC, RoHS.

- **WARRANTY**

5 Years Limited Warranty, Rated for 50,000 hours(Refer to your warranty documentation for more information.)

5 Power + 5 CCT selectable:

SPECIFICATION				
MODEL	SS-BPL14-TCP40W	SS-BPL22-TCP40W	SS-BPL24-TCP72W	SS-BPL24-TCP50W
WATTAGE	15/20/25/30/40W	15/20/25/30/40W	30/40/50/60/72W	25/30/35/40/50W
EFFICACY	5872LM(Max)	5832LM(Max)	12225LM(Max)	7365LM(Max)
CCT	3500K/4000K/5000K/5700K/6500K Tunable			
CRI	Ra>80			
INPUT VOLTAGE	AC120-277V/AC120-347V			
POWER FACTOR	0.95			
DRIVER EFFICACY	90%			
DIMMING	0-10Vdc			
LIFE SPAN	>50,000 hours			
WORKING TEMPERATURE	-40℉~113℉			
STORAGE TEMPERATURE	-40℉~176℉			
OUTDOOR RATING	Damp			
WARRANTY	5 years limited			

Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-755-28195934 | Fax: +86-755-28195934 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com

LED BACK-LIT PANEL LIGHT

WATTAGES: 40W, 50W, 72W Max Tunable

Images:

1′ x 4′




FRONT BACK

2′ x 2′



FRONT BACK


2′ x 4′

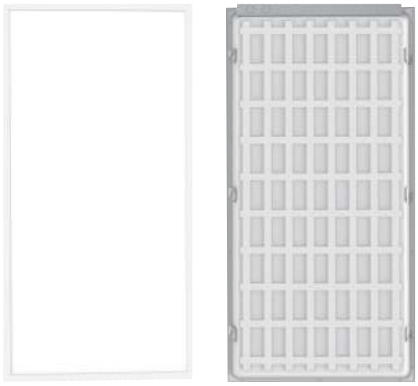


FRONT BACK

Product Dimension:


1′ x 4′

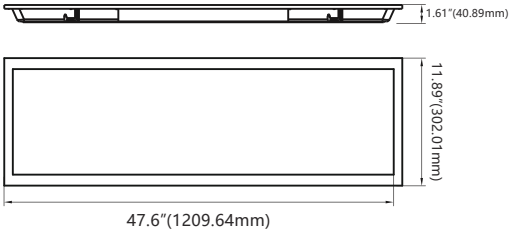

2′ x 2′

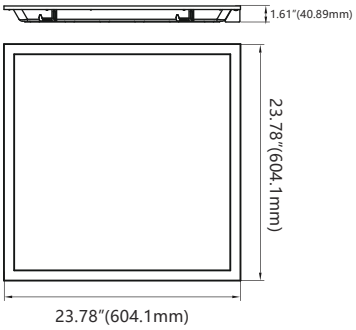

2′ x 4′

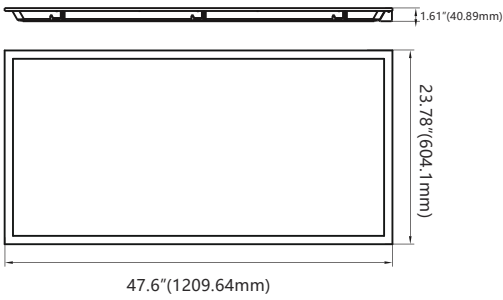


	Packing	Size	Net Weight	Gross Weight	pcs/ctn
1x4FT	Outer Packing Size	L48.82xW5.71xH12.99 inch L1240xW145xH330 mm	13.1Lbs(5.94Kg)	16.25Lbs(7.37Kg)	4pcs/ctn
2x2FT	Outer Packing Size	L24.80xW5.71xH24.80 inch L644xW145xH630 mm	13.49Lbs(6.12Kg)	16.47Lbs(7.47Kg)	4pcs/ctn
2x4FT	Outer Packing Size	L48.82"xW5.71"xH24.80 inch L1240xW145xH630 mm	27.87Lbs(12.64Kg)	33.11Lbs(15.02Kg)	4pcs/ctn

LED BACK-LIT PANEL LIGHT

WATTAGES: 40W, 50W, 72W Max Tunable

Dip Switch for Power and CCT:

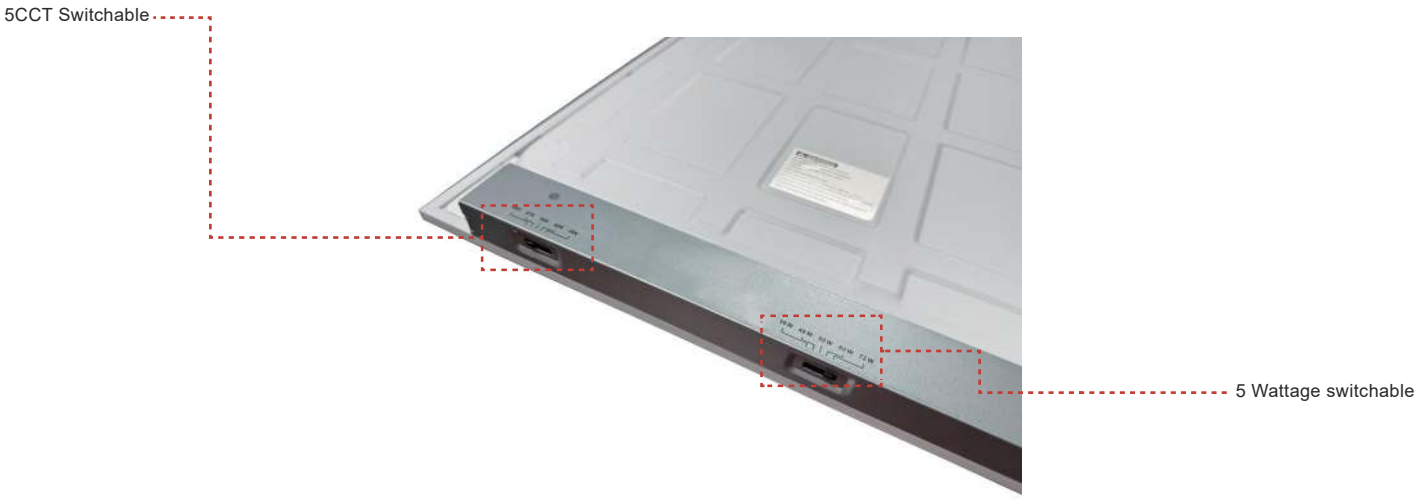

Multiple Sensor Solutions Avaliable

Quick and Easy in-field installation of sensors.
(The sensor receptacle is pre-embedded in the profile frame.)





Product Accessories(SOLD SEPARATELY):



External Sensor



Surface Mount Kit



Flange Kit



Emergency Driver

LED BACK-LIT PANEL LIGHT

WATTAGES: 40W, 50W, 72W Max Tunable


5 Power + 5 CCT selectable:
SS-BPL24-TCP72W-CCT-y-xx


SS	BPL	24	TCP72W	CCT	Y	xx
COMPANY	PRODUCT	SIZE	POWER	CCT	CONTROL	INPUT VOLTAGE
Starlake	Panel Light	14=1*4' 22=2*2' 24=2*4'	TCP = Adjust color Temperature and Wattage 40W=15/20/25/30/40W 50W=25/30/35/40/50W 72W=30/40/50/60/72W		A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) BT:Bluetooth sensor Balnk: no provide sensor	Blank=120-277Vac


DISTRIBUTION


For complete IES files, please visit our website.

SS-BPL14-TCP40W(40W, 5000K)

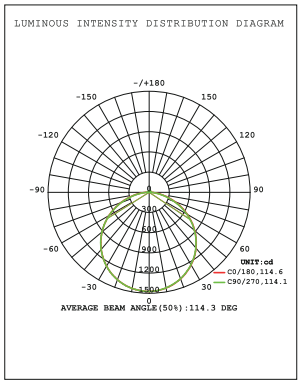


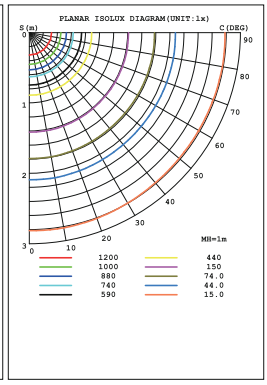


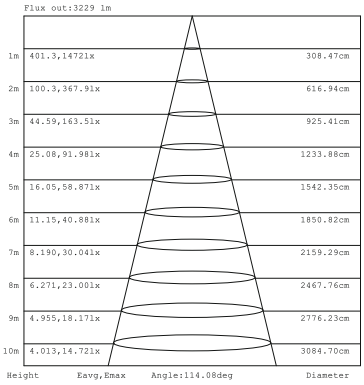


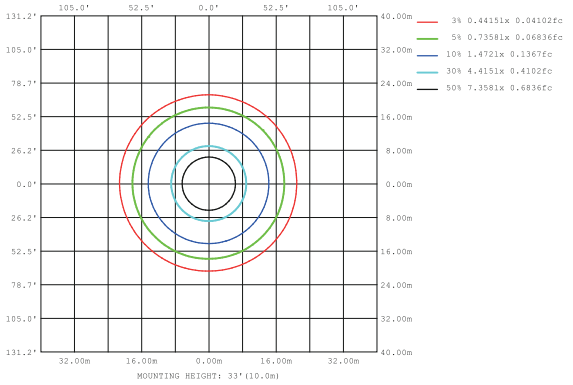


SS-BPL22-TCP40W(40W, 5000K)

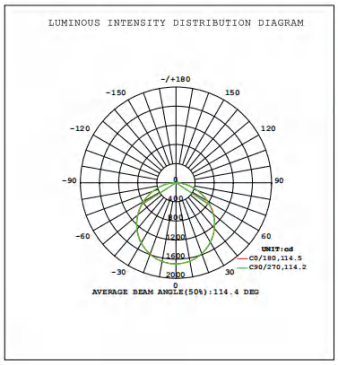


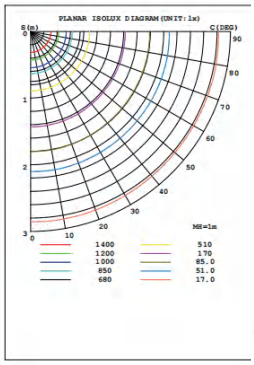


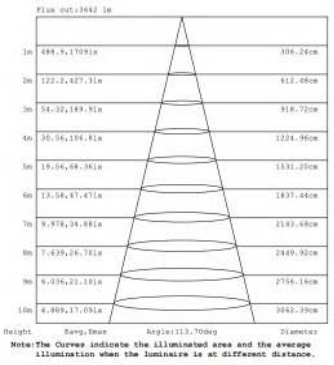


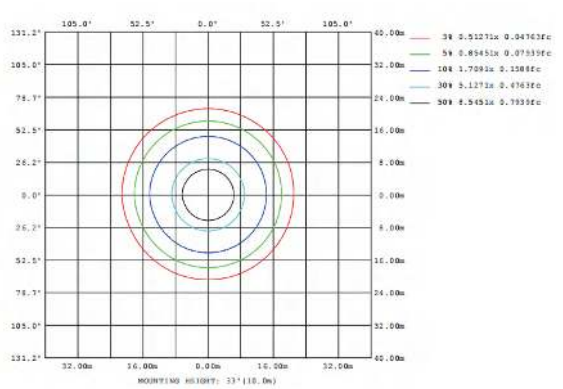


SS-BPL24-TCP50W(50W, 5000K)

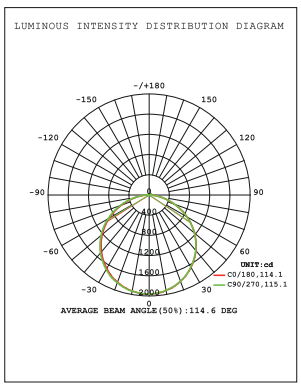

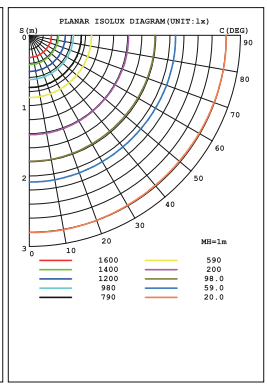

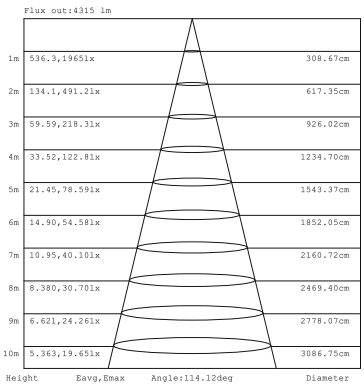

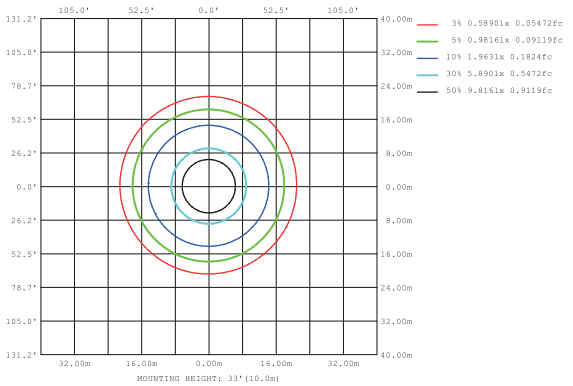



Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-755-28195934 | Fax: +86-755-28195934 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com


LED BACK-LIT PANEL LIGHT


WATTAGES: 40W, 50W, 72W Max Tunable

SS-BPL24-TCP72W(72W, 5000K)

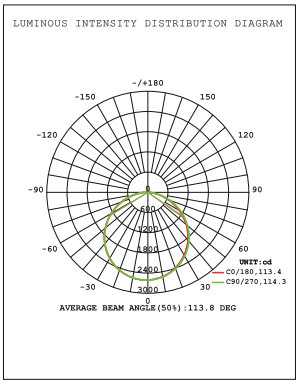

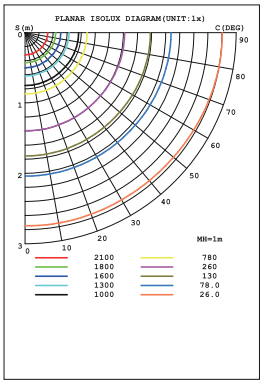

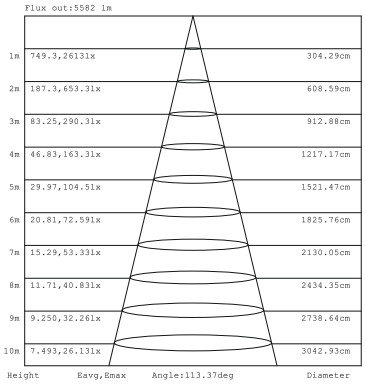

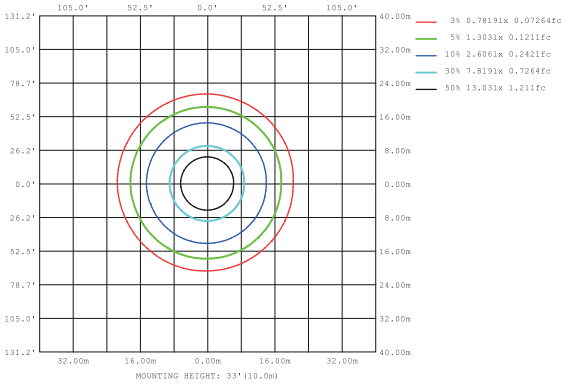

Applications



StarLake

Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-755-28195934 | Fax: +86-755-28195934 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com