LED BATHROOM MIRROR

WATTAGES: 10/25W, 15/35W



900mm*600mm
(35.43"*23.62")



1200mm*900mm
(47.24"*35.43")

Certification StandardsAll electronic component-sused in this product are ULlisted.

"This device complies with part 15 of the FCC Rules.Operation is subject to the following two conditions:(1)This device may not cause harm-ful interference, and (2)this device must accept any interference received,including interference that may cause undesiredoperation.

NTC-ER2307004

FEATURES:

- High luminous efficiency.
- High uniformity (no dark areas at the four corners).
- Eco-friendly mirror - produces bright and clear images.
- Internal and external lighting (individually controllable, allowing for single internal lighting, single external lighting, or simultaneous internal and external lighting).
- Touching the button can turn off the backlight.
- It can achieve infinite color adjustment and infinite dimming.

PRODUCT PARAMETERS:

SPECIFICATION				
MODEL	900mm*600mm (35.43"*23.62")		1200mm*900mm (47.24"*35.43")	
WATTAGE	10W	25W	15W	35W
LUMEN	750LM	875LM	1100LM	1250LM
Color Temperature	3000/4500/6000 Tunable			
CRI	Ra>90			
Defogging Time(Auto Shutdown)	1H			
IP Rate	54			
Voltage	120V			
Working Temperature	-20℉~50℃			

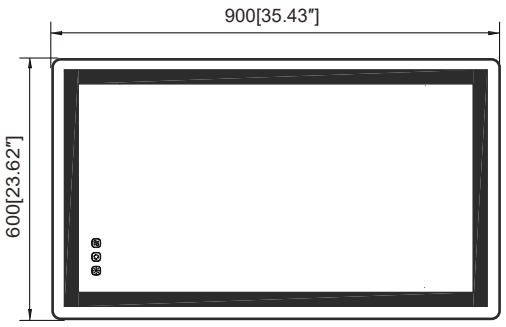
LED BATHROOM MIRROR

WATTAGES: 10/25W, 15/35W

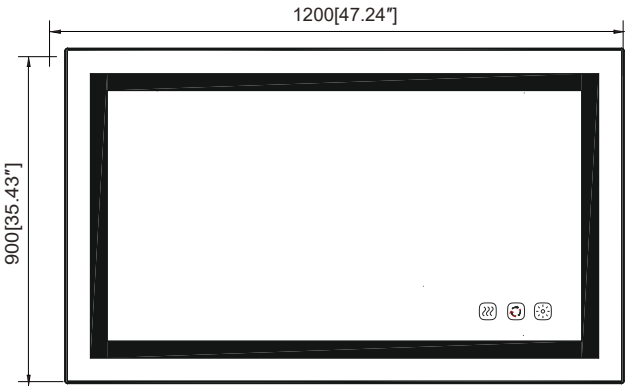
PRODUCT DIMENSION

(unit:mm)

900*600




1200*900



No.	Customer P/N	Description	Size			N.W(1Pcs/Ctn)	G.W(1Pcs/Ctn)
			L/mm	W/mm	H/mm		
1	MF13626-CCT-INOT	LED BATHROOM MIRROR 25W+10W,AC120V Anti fog 30W 2700-6000K Lamp: 24V DC LED Light Strip	1020mm (40.16")	700mm (27.56")	70mm (2.76")	7.20kg (15.87lbs)	9.95kg (21.94lbs)
2	MF14836-CCT-INOT	LED BATHROOM MIRROR 35W+15W, AC120V Anti fog 100w 2700-6000K Lamp: 24V DC LED Light Strip	1340mm (52.76")	1040mm (40.94")	85mm (3.35")	14.65kg (32.3lbs)	18.8kg (41.45lbs)

MOUNTING BRACKETS:

A x 4



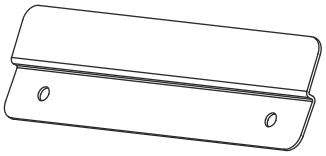
Screws

B x 4



Wall anchors

C x 2



Fixed part

D x 1



LED BATHROOM MIRROR

WATTAGES: 10/25W, 15/35W

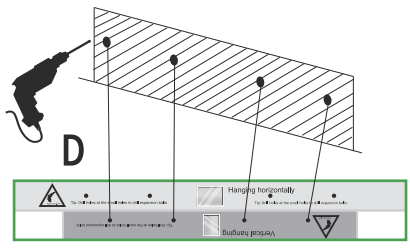
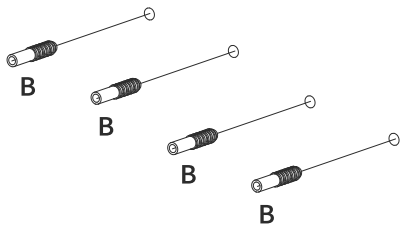
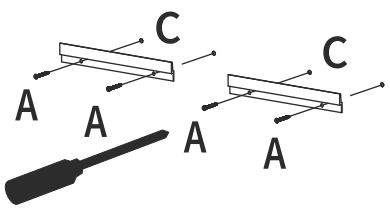
INSTRUCTIONS FOR USE OF ACCESSORIES

Installation cardboard: according to the size of the product custom installation hole map,paste in the location where you want to install the mirror light wall, and then lock the screwhole location, easy to install.

TOUCH CONTROL OPERATION	
	①-Short-touch: Turn on/off the lights. ②-Long-touch: Adjust the brightness stepless. ③-Double-touch: Adjust 3 lighting modes (Only front light, only backlit and double lighting strips) recycly after turning on the lighting strips.
	Short touch to adjust 3 color modes. Long-touch to adjust color temperature stepless.
	Short-touch to turn on/off the anti-fog function.

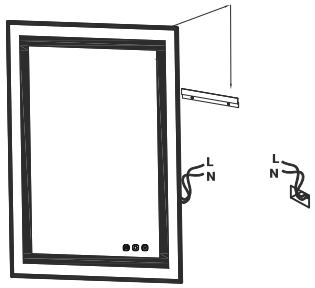
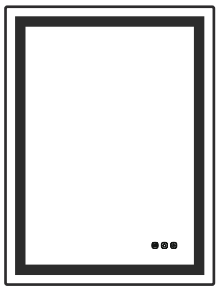
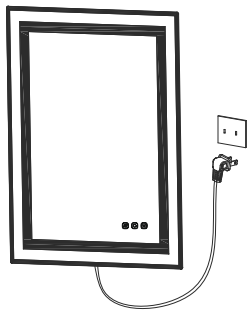
HOW DOES THE BRIGHTNESS TOUCH SWITCH WORK IN DIFFERENTLIGHTING MODES?	
DOUBLE LED LIGHTING STRIPS	①-Short-touch: Turn on/off the lights ②-Long-touch: Adjust the brightness stepless. ③-Double-touch: Adjust 3 lighting modes (Only front light, only backlitand double lighting strips) recycly after turning on the lighting strips. Note: Turn off the indicator light after turning off the lighting strips.
ONLY FRONT LIGHT	
ONLY BACKLIT	

VERTICAL INSTALLATION

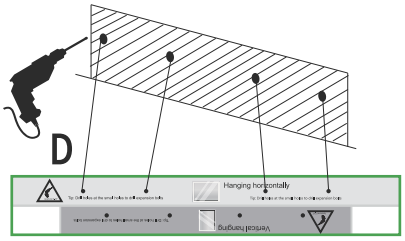
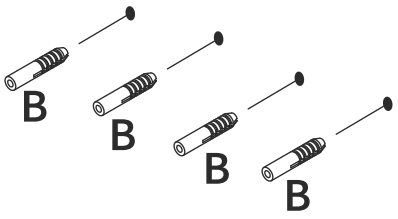
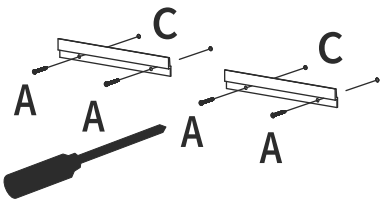
1	2	3
Aperture:0.24” 		
Place the punch positioning card where you want to install the mirror keep it horizontal and drill holes.	After drilling the hole knock the expansion bolt into the hole.	Screw the hanger delivered to the corresponding position. (Pay attention to the direction upwards)

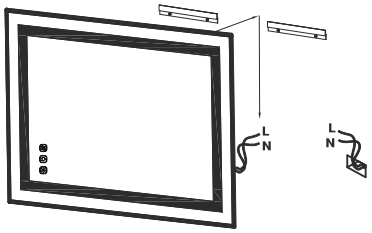
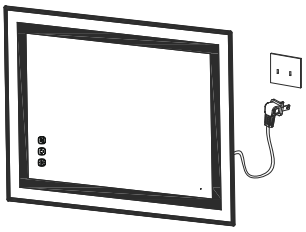
LED BATHROOM MIRROR

WATTAGES: 10/25W, 15/35W

4	5	6
		
Wall Switch Control Cut off the plug and connect the mirror's wire to the wall switch's wire. (L-L N-N).	Clip the lamp to the wall via fixed parts. Turn on and works, installation finished.	Plug-in Equipped with a US 2-prong plug. It can be used with wall sockets.

HORIZONTAL INSTALLATION

1	2	3
Aperture:0.24” 		
Place the punch positioning card where you want to install the mirror keep it horizontal and drill holes.	After drilling the hole knock the expansion bolt into the hole.	Screw the hanger delivered to the corresponding position. (Pay attention to the direction upwards)

4	5	6
		
Wall Switch Control Cut off the plug and connect the mirror's wire to the wall switch's wire. (L-L N-N).	Clip the lamp to the wall via fixed parts. Turn on and works, installation finished.	Plug-in Equipped with a US 2-prong plug. It can be used with wall sockets.

LED BATHROOM MIRROR

WATTAGES: 10/25W, 15/35W

APPLICATIONS:



WARNING:

Please read this instruction carefully and re-read it during the installationprocess to ensure that your product is installed safely and correctly.Cut off the power supply during installation and maintenance. It is recommended to remove the fuse or turn off the circuit breaker for necessarycircuits before installation.Fitting in bathrooms is subject to the appropriate zone in accordance with IEE Regulation. This product is suitable for zone 2 and outside zones. it isnot suitable for installation in zone 0 or zone 1. It is also not suitable forinstallation in saunas area,steam rooms or shower cubicles. This productis only suitable for permanent installation. DO NOT connect to a trailingplug and socket outlet. Although the waterproofing grade of this product isIP54,but it's only suitable for indoor use. DO NOT attach the product tosurfaces that are damp or electrically conductive.