TUNABLE LED GARAGE GANOPY LIGHT(GP04)

WATTAGES: 100/80/60/40/30W Tunable



Slim, lightweight LED canopy fixture delivers clean,uniform illumination for commercial applications. Supports surface or pendant mounting via rigid conduit. Pre-aligned mounting plate enables fast installation and hands-free wiring. Suitable for new construction and retrofits,with reliable low-maintenance operation for long-term value.

Features:


- High Efficacy & Long Lifespan – Delivers superior luminous efficacy with a rated lifespan that minimizes maintenance and replacement costs.
- Wide Voltage Compatibility – High-efficiency driver supports AC120–277V and AC120–347V input suitable for a broad range of commercial power configurations.
- Superior Thermal Management – Die-cast aluminum housing ensures excellent heat dissipation keeping LED junction temperatures below 85°C for reliable, long-term performance.
- Precision Optics – Advanced optical design maximizes light utilization and delivers uniform beam distribution for consistent illumination.
- Smooth Dimming – Continuous 0–10V dimming capability allows for fine-tuned light output to match application needs.
- Optional Motion Sensor – Plug-and-play occupancy sensor option for enhanced energy efficiency and automated control.

	SPECIFICATION
MODEL	SS-GP04-100W-H-TCP
WATTAGE	100/80/60/40/30W Tunable
LUMENS	13000LM(Max)
CCT	3500K/4000K/5000K Tunable
CRI	> 70
INPUT VOLTAGE	AC120-277V/AC120-347V
LIGHTING ANGLE	150°
OPERATING TEMPERATURE	-40℉~113℉
STORAGE TEMPERATURE	-40℉~158℉
POWER FACTOR	> 0.9
DRIVER EFFICIENCY	> 90%
PROTECTION LEVEL	WET
LIFE TIME	＞50000 hours
WARRANTY	5 years limited

TUNABLE LED GARAGE GANOPY LIGHT(GP04)

WATTAGES: 100/80/60/40/30W Tunable

DIMENSION :

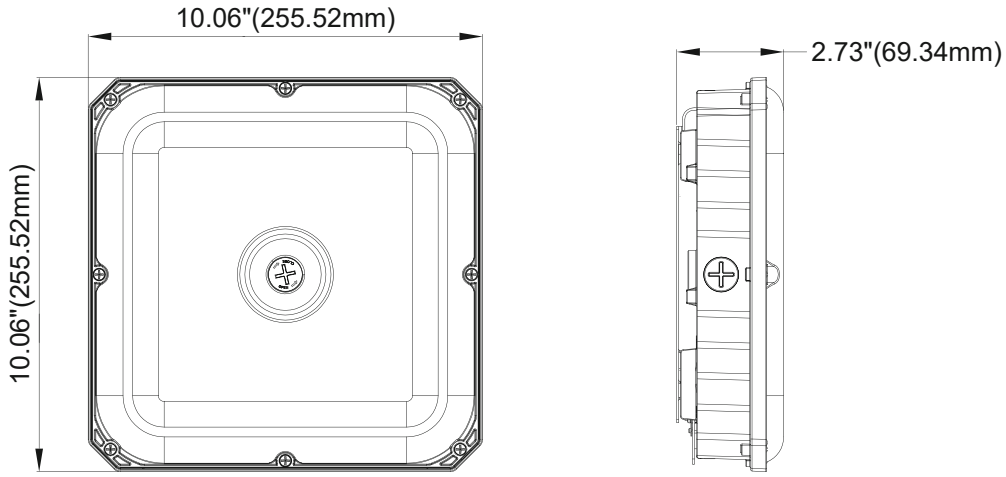

Packing/Weight

Modell	Inner box (1pcs/ctn)	Outber box (4pcs/ctn)	N.W (1pcs/ctn)	G.W (1pcs/ctn)	N.W (4pcs/ctn)	G.W (4pcs/ctn)
100W/80W/60W/40/30W	L10.39xW3.07xH10.39 inch L264xW78xH264 mm	L13.23x9.37xH11.34 inch L336xW283xH288 mm	4.52LBS(2.05Kg)	5.01LBS(2.27Kg)	18.08LBS(8.2Kg)	20.50LBS(9.3Kg)



Easy,screw-in sensors for all your needs.



Easy install with mounting plate.



ACCESSORIES: (SOLD SEPARATELY)



8W Emergency Driver



Microwave Sensor



PIR Sensor



Blue Tooth + Microwave Sensor

TUNABLE LED GARAGE GANOPY LIGHT(GP04)

WATTAGES: 100/80/60/40/30W Tunable

ORDERING GUIDE:

EXAMPLE:


SS-GP04-100W-H-TCP-Y

SS	GP	100W	H	TCP	Y
COMPANY	PRODUCT	POWER	HIGH LUMENS	CCT & Power Tunable	CONTROL
Starlake	Garage Canopy	100/80/60/40/30W		30/40/50K	A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) C: BRT sensor (occupancy+bluetooth) D: PHB sensor (Infrared bluetooth) Blank=no provide sensor

PHOTOMETRICS:

SS-GP04-100W-H-TCP(100W,5000K)


For complete IES files, please visit our website.

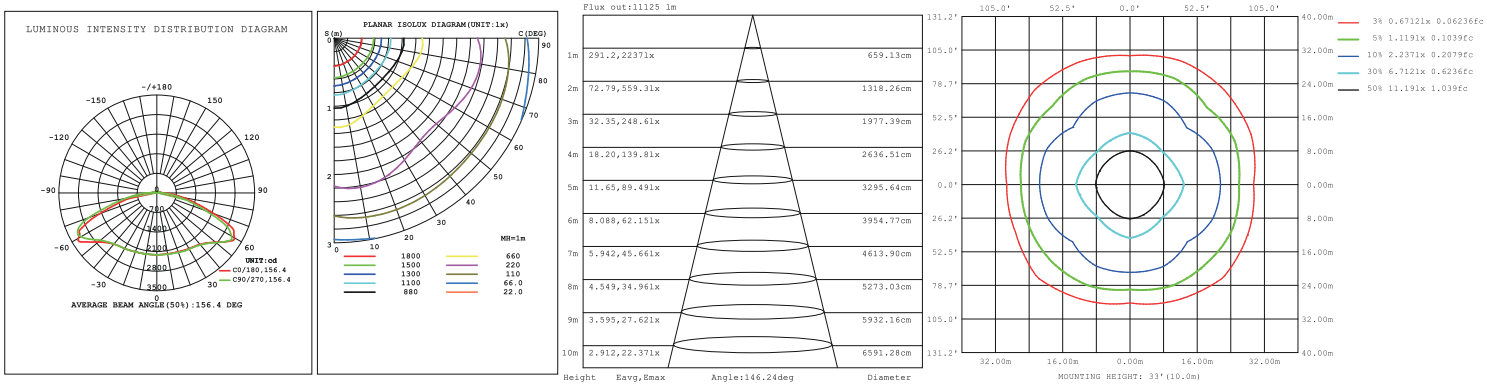


Installation Instruction:

Ceiling Installation:


1.Loosen the screw to take off the mounting plate from the lamp.

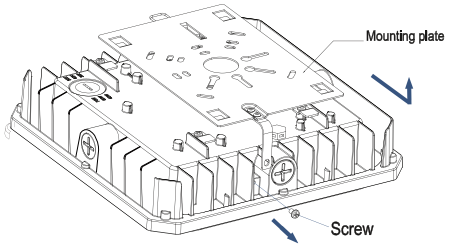


2. Screw the mounting plate to the ceiling.

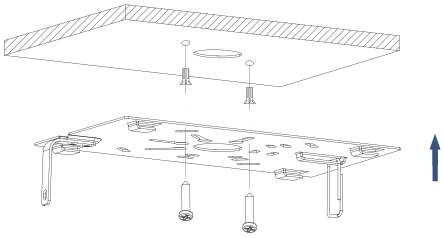


3. Hang the lamp on the ring so as to connect wires with terminal caps.

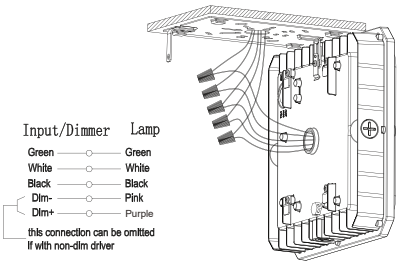

4.Hook up lamp on the mounting plate.

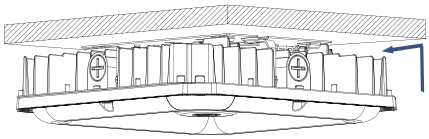

5. Secure the screw. Installation completed.

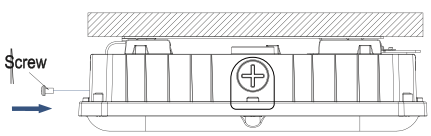

TUNABLE LED GARAGE GANOPY LIGHT(GP04)

WATTAGES: 100/80/60/40/30W Tunable

Applications

