LED TRACK LIGHT(TL04)

WATTAGES: 20/15/10W, 30/25/20W Tunable



Support Halo/Juno exchangeable adapter.
90+CRI with 3-step MacAdam Ellipse.
High-Efficacy with precise Center Beam Candle Power, can pivot +/-90° vertically.

Recommended Application： Retailers, Supermarkets,Restaurants, Shopping Mall, etc.

PRODUCT FEATURES:

- 95LPW & Triac dimming for CCT &wattage selectable.
- Daisy connection with very convenient replacement in 1minute.
- Single voltage: AC120V.
- Available with suspending installation and surface-mounted installation.
- 20°-50°Beam Angle for variety choices.
- 5 years warranty.

SPECIFICATION		
MODEL	SS-TL04-20W-TCP	SS-TL04-30W-TCP
WATTAGE	20/15/10W Tunable	30/25/20W Tunable
LUMENS	1974LM(Max)	2905LM(Max)
CCT	2700K/3000K/3500K/4000K/5000K Tunable	
CRI	Ra >90	
INPUT VOLTAGE	AC120V	
DISTRIBUTION	20-50° Zoomable	
POWER FACTOR	>0.9	
DRIVER EFFICACY	>87%	
LIFE SPAN	>50,000 hrs	
WORKING TEMPERATURE	-40°F~104°F	
STORAGE TEMPERATURE	-40°F~176°F	
WARRANTY	5 years limited	

LED TRACK LIGHT(TL04)

WATTAGES: 20/15/10W, 30/25/20W Tunable

Adapter:

- Compatible with H-type track adapter, J-type track adapter, suitable for all your projects requirements.
- H type and J-type track adapter are interchangeable




"Halo" is Standard adapter with fixture

"Juno" is option adapter and sold seperately

Luminaire Arm:

- 180° tilt and 350° rotation adjustable

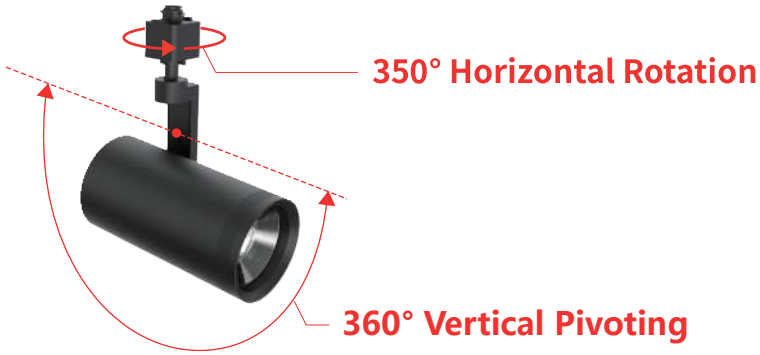

Beam angle:

- Zoomable track light heads 20° - 50° adjustable to meet different application requirements



Application:


- Recommended Use for Retailers, Supermarkets, Restaurants, Shopping Mall, Grocery, Hospitality, Commercial, Residential, Exhibit etc.

LED TRACK LIGHT(TL04)


WATTAGES: 20/15/10W, 30/25/20W Tunable

PRODUCT DIMENSION:

20/15/10W




30/25/20W





Power(Size)	Inner packing size (1 pcs/ctn)	N.W. (1pcs/ctn)	G.W. (1pcs/ctn)	Outer packing size	N.W.	G.W.	pcs/ctn
SS-TL04-20W-TCP	L4.17xW3.5xH10.2 inch L106xW89xH259 mm	1.5Lbs(0.68Kg)	1.7Lbs(0.77Kg)	L17.32xW10.63xH18.50 inch L440xW270xH470 mm	29.89Lbs(13.56Kg)	35.1Lbs(15.92Kg)	20
SS-TL04-30W-TCP	L4.13xW3.46xH11.54 inch L105xW88xH293 mm	2.4Lbs(1.09Kg)	2.65Lbs(1.20Kg)	L17.32xW12.32xH14.65 inch L440xW313xH372 mm	41.89Lbs(19.00Kg)	43.21Lbs(19.60Kg)	16

Power(Size)	Inner packing size (1 pcs/ctn)	N.W. (1pcs/ctn)	G.W. (1pcs/ctn)	Outer packing size	N.W.	G.W.	pcs/ctn
SS-TL04-20W-TCP (Canopy Pendent)	L9.96xW5.71 xH3.94 inch L253xW145xH100 mm	1.72Lbs(0.78Kg)	1.82Lbs(0.825Kg)	L20.67xW12.17xH13.19 inch L525xW309xH335 mm	41.27Lbs(18.72Kg)	45.35Lbs(20.57Kg)	24
SS-TL04-20W-TCP (Track Head Pendent)	L4.13xW2.68xH8.66 inch L105xW68xH220 mm	1.43Lbs(0.65Kg)	1.52Lbs(0.69Kg)	L17.32xW12.32xH14.65 inch L440xW313xH372 mm	28.66Lbs(13.00Kg)	32.23Lbs(14.62Kg)	20


Track(Size)	Outer packing size (12pcs/ctn)	N.W. (12pcs/ctn)	G.W. (12pcs/ctn)
4FT TRACK	L49.02xW4.41xH3.15 inch L1245xW112xH80 mm	14.99Lbs(6.8Kg)	17.15Lbs(7.78Kg)
8FT TRACK	L97.05xW4.41xH3.15 inch L2465xW112xH80 mm	29.37Lbs(13.32Kg)	30.86Lbs(14Kg)

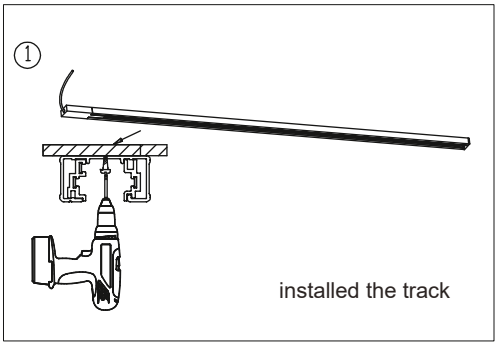

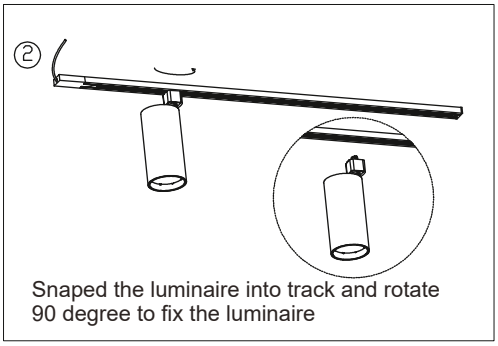

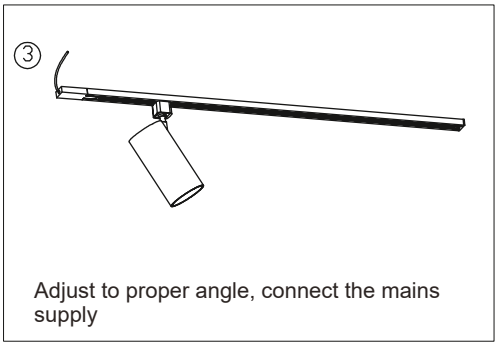

Other Installation Methods (Sold Seperately)









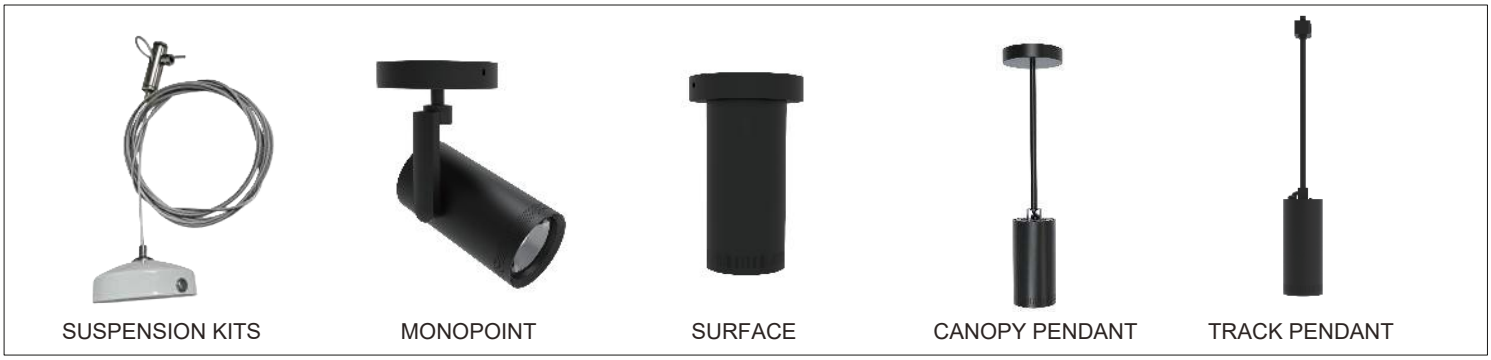


Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-0755-21008727 | Fax: +86-0755-21008727 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com

LED TRACK LIGHT(TL04)

WATTAGES: 20/15/10W, 30/25/20W Tunable

Optional accessories

Surface Mounted Track 	Live End Conduit Connector 	Input End Connector 	End Cap 	Conductive Connector 
Floating Canopy Feed 	Wire Flexible Connector 	T-Connector 	L-Connector 	"X" Connector 

ORDERING GUIDE:


EXAMPLE:


SS-TL04-20W-TCP-a-L-z

SS	TL04	20W	TCP	a	L	z
COMPANY	PRODUCT	POWER	Tunable CCT and Power	Beam Angle	Lens	Finish
Starlake	LED Track Light	20W=20/15/10W 30W=30/25/20W	2700K/3000K/3500K/ 4000K/5000K	20-50° Tunable		B=Black W=White

Rail system connection diagram:

Before installation, cut off the spring tab on one side of the ground wire connector and connect it effectively to the track's ground copper wire.



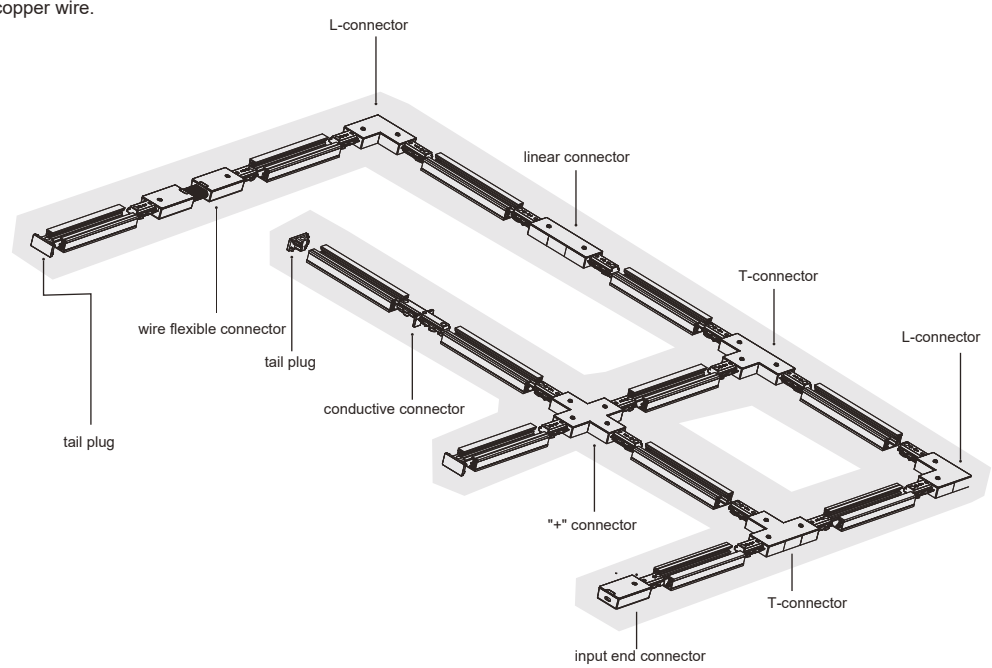

LED TRACK LIGHT(TL04)

WATTAGES: 20/15/10W, 30/25/20W Tunable

Applications



