LED TROFFER LIGHT

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable



1X4



2X4

2X2

This troffer is field-adjustable, and can be programmed with a CCT of 3500/4000/5000/5700/6500K, eliminating the need to stock multiple color temperatures.Ideal use for office spac es walkways, schools/campuses, shopping centers, hospitali ty andhealth care industry.Ideal use for office spaces,walkwa ys,schools/camp uses, shoppong centers, hospitality and he alth care industry.

PRODUCT FEATURES:

★ **CONSTRUCTION**

Constructed of one-piece ribbed unitized housing and corners that interlock, preventing damage to luminaire. All sides and corners are turned in and hemmedremoving sharp edges for safe handling and installation.

★ **ELECTRICAL**

Luminaire is built with the highest quality120-277Vac & 120-347Vac drivers.

★ **OPTICAL SYSTEM**

Designed to reduce glare and improve light distribution through precision formed

★ **DIMMING**

0-10V dimmable standard.

★ **LISTING**

ETL Listed, FCC, RoHS, CE

★ **WARRANTY**

5 Years Limited Warranty,Rated for 50,000 hours (Refer to your warranty documentation for more information.)

5 CCT SELECTABLE:

SPECIFICATION			
MODEL	SS-TRF14-TCP40W-CCT	SS-TRF22-TCP40W-CCT	SS-TRF24-TCP50W-CCT
WATTAGE	40/30/25/20/15W	40/30/25/20/15W	50/40/35/30/25W
CCT	3500K/4000K/5000K/5700K/6500K Tunable		
LUMENS	6179LM(Max)	6142LM(Max)	6182LM(Max)
CRI	Ra>80		
INPUT VOLTAGE	AC120-277V/AC120-347V		
DISTRIBUTION	120°		
POWER FACTOR	>0.9		
DRIVER EFFICACY	>85%		
LIFE SPAN	>50,000hours		
WORKING TEMPERATURE	-40°F~113°F		
STORAGE TEMPERATURE	-40°F~158°F		
OUTDOOR RATING	IP40,Suitable for damp locations		
WARRANTY	5 years limited		

LED TROFFER LIGHT

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable

IMAGES:

1’ x 4’	2’ x 2’	2’ x 4’










Product Dimension:

1’ x 4’	2’ x 2’	2’ x 4’

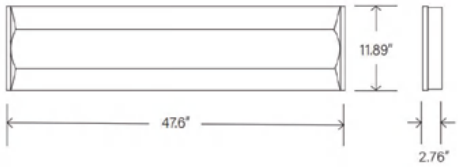

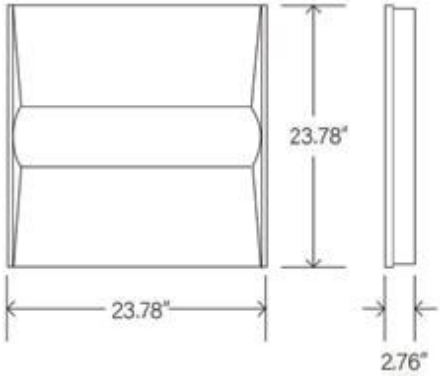

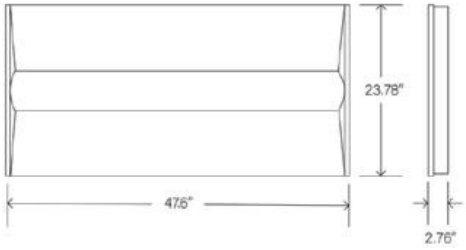

PRODUCT DIMENSION:

	Packing	Size	Net Weight	Gross Weight	pcs/ctn
1x4FT	Outer Packing Size	L49.41xW8.27xH13.78 inch L1255xW210xH350 mm	20.06Lbs(9.34Kg)	22.49Lbs(10.2Kg)	4pcs/ctn
2x2FT	Outer Packing Size	L24.61xW8.58xH25.08 inch L625xW217xH637 mm	20.94Lbs(9.5Kg)	23.37Lbs(10.6Kg)	4pcs/ctn
2x4FT	Outer Packing Size	L48.62xW8.58xH25.08 inch L1234xW217xH637 mm	37.70Lbs(17.1Kg)	41.01Lbs(18.6Kg)	4pcs/ctn

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable

POWER AND CCT TUNABLE AVAILABLE:



MULTIPLE SENSOR SOLUTIONS AVALIABLE

Quick and Easy in-field installation of sensors.
(The sensor receptacle is pre-embedded in the profile frame.)





Product Accessories(SOLD SEPARATELY):



External Sensor



Emergency Driver

LED TROFFER LIGHT

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable

ORDERING GUIDE:

EXAMPLE:


SS-TRF24-TCP50W-CCT-Y


SS	TRF	24	TCP	50W	CCT	Y
COMPANY	PRODUCT	Size	Function	Power	CCT	CONTROL
Starlake	LED Troffer light	14=1x4' 22=2x2' 24=2x4'	Tunable CCT and Power	40W=40/30/25/20/15W 50W=50/40/35/30/25W	3500K/4000K/5000K 5700K/6500K Tunable	A=PIR Sensor(occupancy sensor) B=MS Sensor(occupancy sensor) BT=Bluetooth sensor Blank=no Provide sensor


DISTRIBUTION

For complete IES files, please visit our website.


SS-TRF14-TCP40W-CCT (40W 5000K)

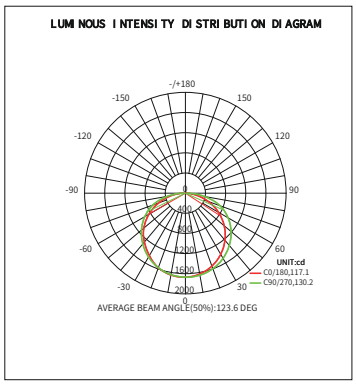


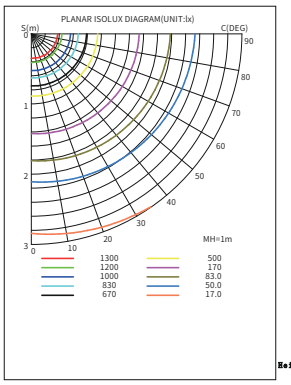


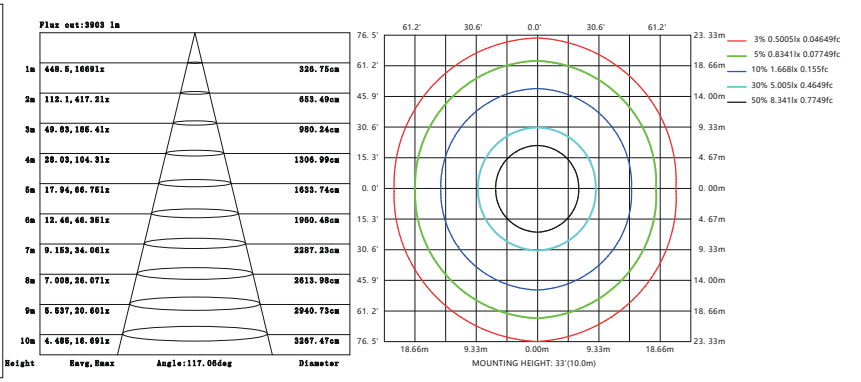


SS-TRF22-TCP40W-CCT (40W 5000K)

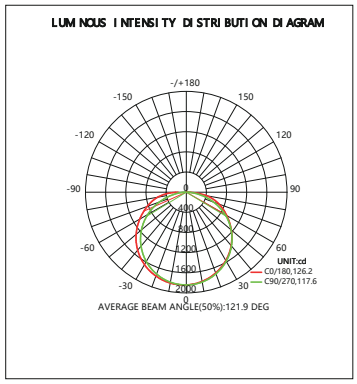


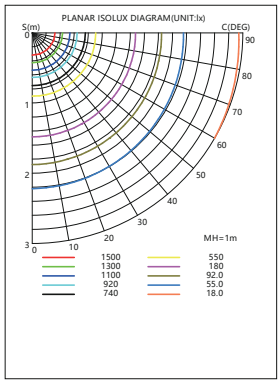


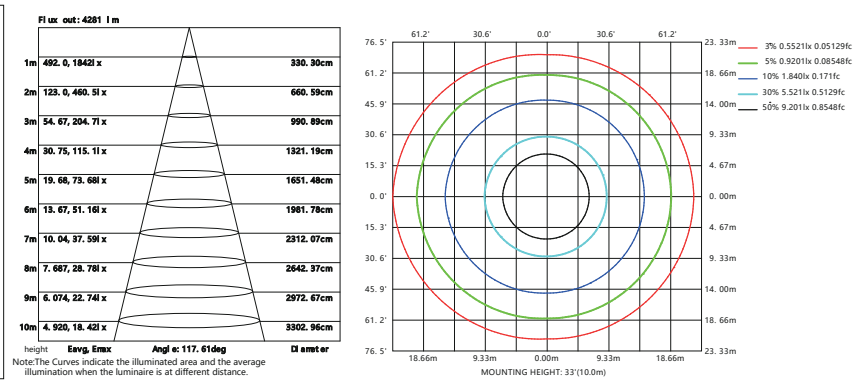

SS-TRF24-TCP50W-CCT (50W 5000K)

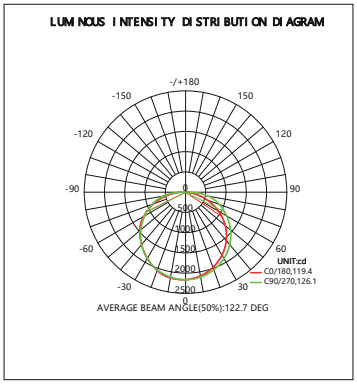

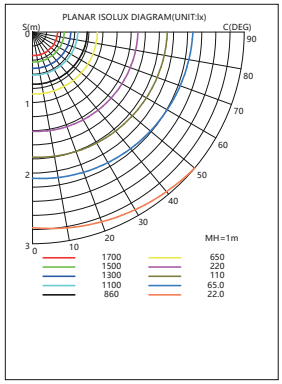

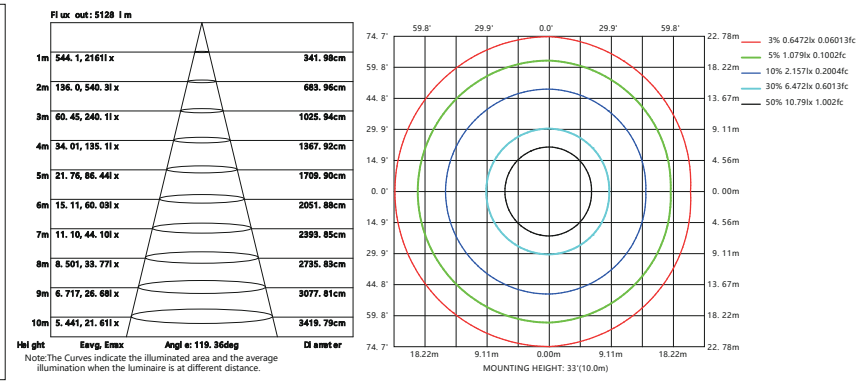

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable

Applications

