# VAP SERIES VAPOR TIGHT LIGHT

## WATTAGES: 60/50/30W, 150/100/70W Tunable



VAPOR series tri-proof light is designed for places requiring waterproof, dustproof and slight corrosion-resistant lighting, such as warehouse, parking lot, food factory, dust factory, cold storage etc. It can be used in places requiring corrosion-resistant lighting.

### PRODUCT FEATURES

- Efficacy:150lm/w
- Input Voltage:AC120-277V/120-347V
- Lumen Output: 7329 to 15063 Lumens
- Dimmable: 0-10V dimming
- Size: 4ft,8ft
- CCT: 3500/4000/5000/5700/6500K Selectable
- Rating: IP65
- MOUNTING: Aluminum Surface Mount Clips standard.
- OPTICS: Anti-UV Frosted Polycarbonate Lens standard.
- Certification: ETL, DLC6.0 List
- EMERGENCY: Installed 90 Minute Emergency Backup Battery LED Driver available.


### PRODUCT PARAMETERS


| SPECIFICATION | | |
|---|---|---|
| **Model Number** | SS-VAP-F-50W-H-TCP | SS-VAP-E-100W-H-TCP |
| **Wattage** | 50/40/35/30/25W | 100/80/70/60/50W |
| **Lumens** | 7329LM(Max) | 15063LM(Max) |
| **CCT** | 3500K/4000K/5000K/5700/6500K Tunable | |
| **Beam Angle** | 120° | |
| **Dimming** | 0-10V | |
| **Input Voltage** | AC120-277V/AC120-347V | |
| **CRI** | Ra>80 | |
| **Operating Temperature** | -40°F~113°F | |
| **Storage Temperature** | 40°F~113°F | |
| **Environment Location** | Wet Location | |
| **Life span** | ≥50000H | |
| **Lamp** | White | |
| **WARRANTY** | 5 Years Limited | |

# VAP SERIES VAPOR TIGHT LIGHT

## WATTAGES: 60/50/30W, 150/100/70W Tunable

### PRODUCT DIMENSION

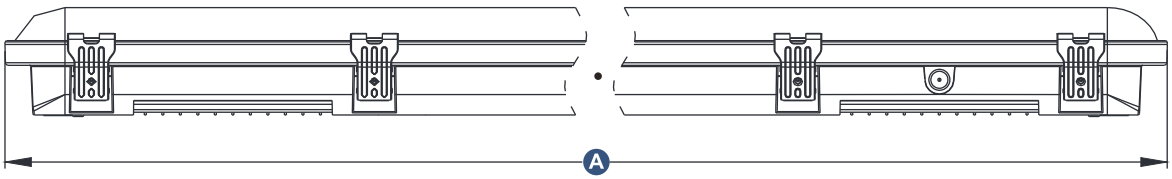


| Specification | Power | A | B | C |
|---|---|---|---|---|
| 4FT | 50W | 47.24"(1200mm) | 3.74"(95mm) | 3.15"(80mm) |
| 8FT | 100W | 94.49"(2400mm) | 3.74"(95mm) | 3.15"(80mm) |

### PACKGING / WEIGHT

| | Inner Packing Size | Outer Packing Size | Net Weight | Gross Weight | Qty |
|---|---|---|---|---|---|
| 4FT | L25.59xW4.21xH4.02 inch<br>L1265xW336xH386 mm | L49.80xW13.23xH15.20 inch<br>L1265xW336xH386 mm | 48.94Lbs(22.20Kg) | 52.47Lbs(23.80Kg) | 9 |
| 8FT | / | L96.26xW4.02xH4.21 inch<br>L2445xW102xH107 mm | 8.84Lbs(4.01Kg) | 11.68Lbs(5.30Kg) | 1 |

### Standard Accessories



Surface Mount Clips

### Product Accessories(SOLD SEPARATELY):



Suspension Kits



EM driver



Microwave motion sensor



Remote Controller

### LNSTALLATION REQUIREMENT

1. Power off before installation.

2. Thread the input cable through waterproof jointthen combine the input thread and wiring terminals, and ensure reliable contact.

3. Tighten the knob bracket.

4. Ceiling installation: fix the ceiling bracket on the installation surface via self-tapping screws and flat gasket then snap the lamp body into bracket.

Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-0755-21008727 | Fax: +86-0755-21008727 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com

# VAP SERIES VAPOR TIGHT LIGHT


## WATTAGES: 60/50/30W, 150/100/70W Tunable

**5 Power + 5 CCT selectable:**
**SS-VAP-T-25W-H-xx-TCP-y**


| SS | VAP | T | 25W | H | xx | TCP | y |
|---|---|---|---|---|---|---|---|
| COMPANY | PRODUCT | SIZE | POWER | HIGH LUMENS | VOLTAGE | CCT | CONTROL |
| Starlake | Vapor Tight Light | F=4FT<br>E=8FT | 50W=50/40/35/30/25W<br>100W=100/80/70/60/50W | | Blank=120-277VAC | 3000K<br>4000K<br>5000K<br>5700K<br>6500K | S=PIR sensor( Occupancy);<br>S=MS sensor( Occupancy);<br>NC=Bluetooth sensor,<br>E=Emergency;<br>Blank=no provide sensor, |

### INSTALLATION DRAWING

#### Ceiling Installation

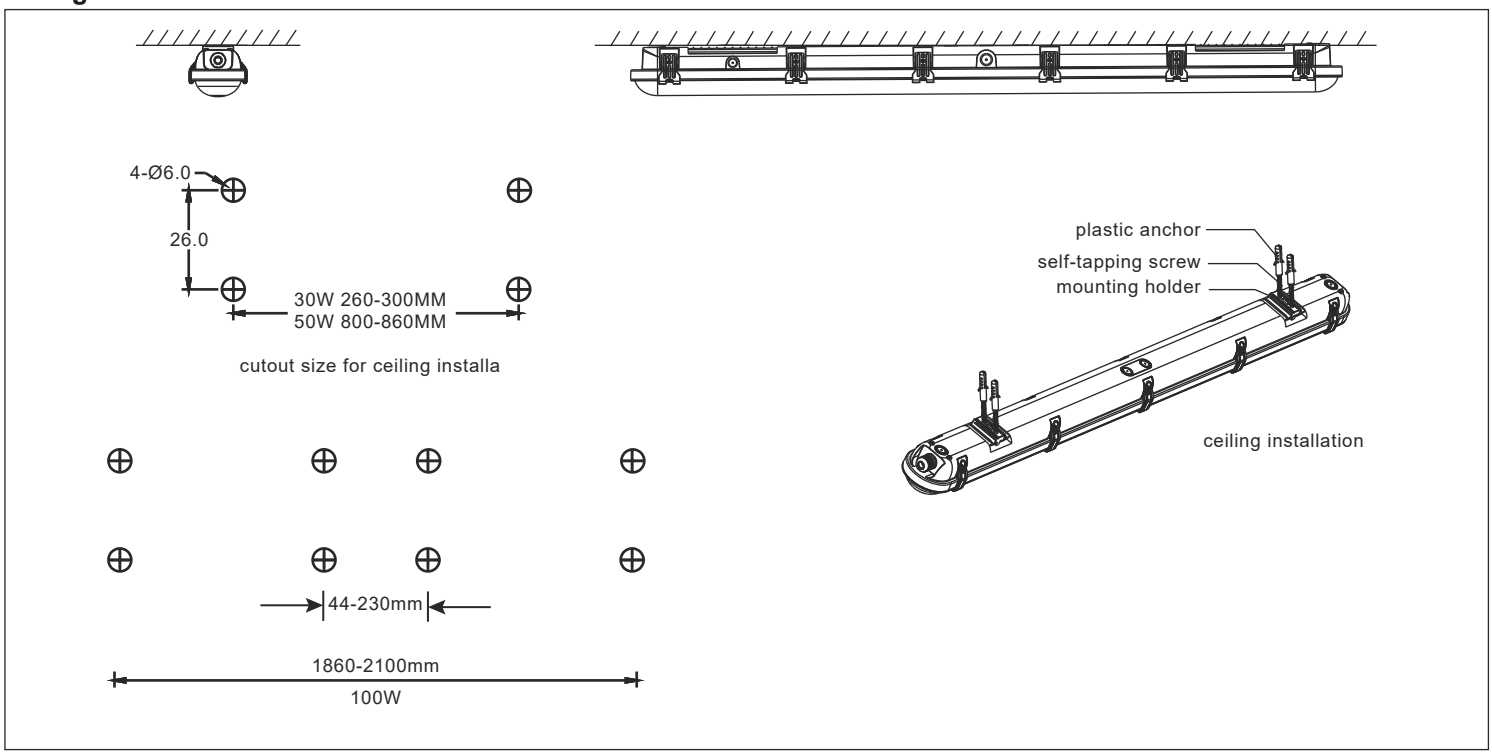


#### Suspendent Installation

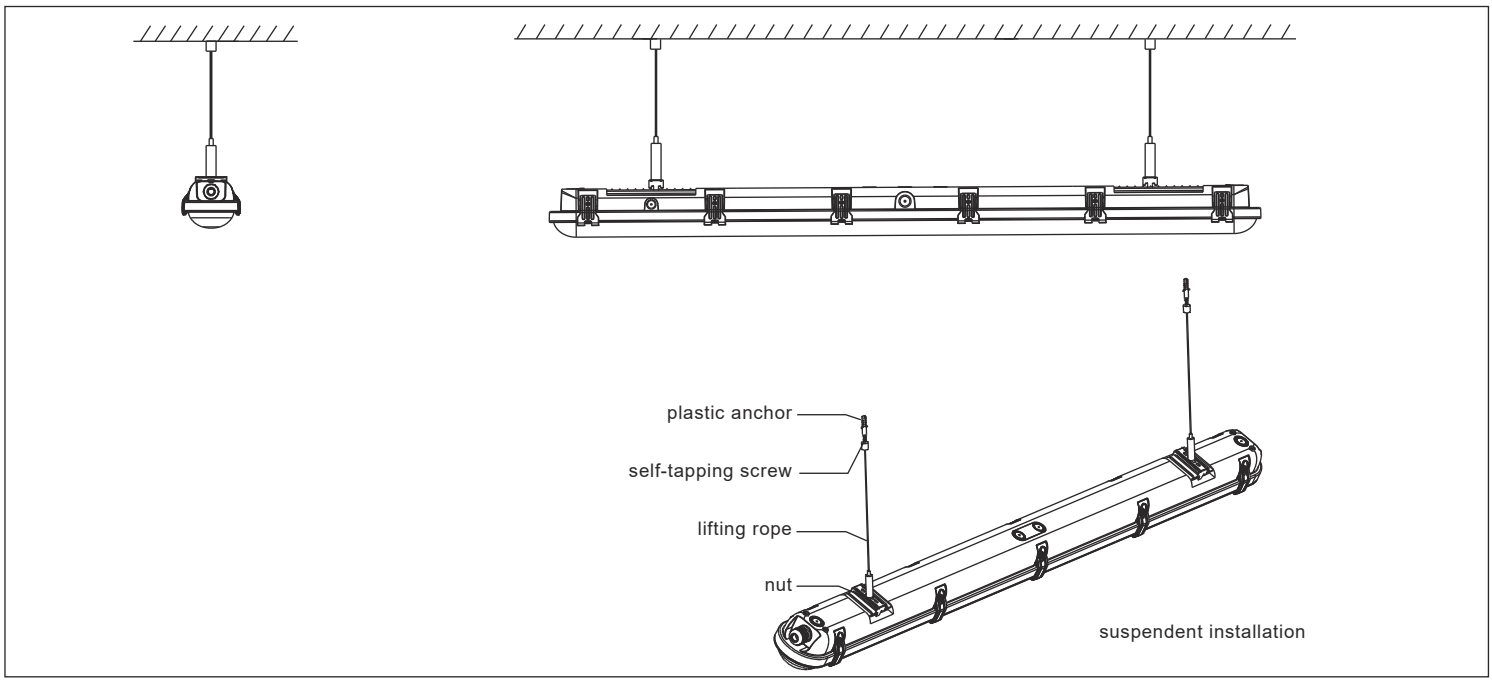


# VAP SERIES VAPOR TIGHT LIGHT

## WATTAGES: 60/50/30W, 150/100/70W Tunable

### CONNECTION DIAGRAM

Refer To The Wiring Diagram For Wiring.

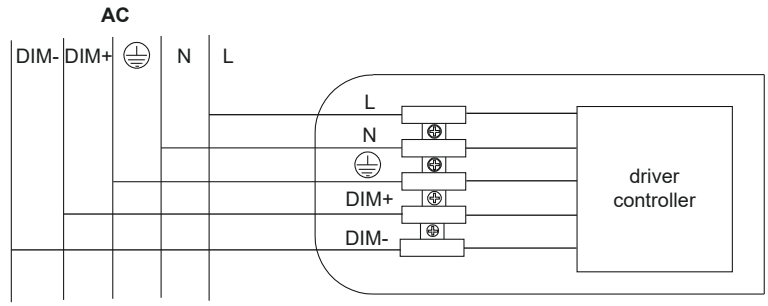


### APPLICATION

